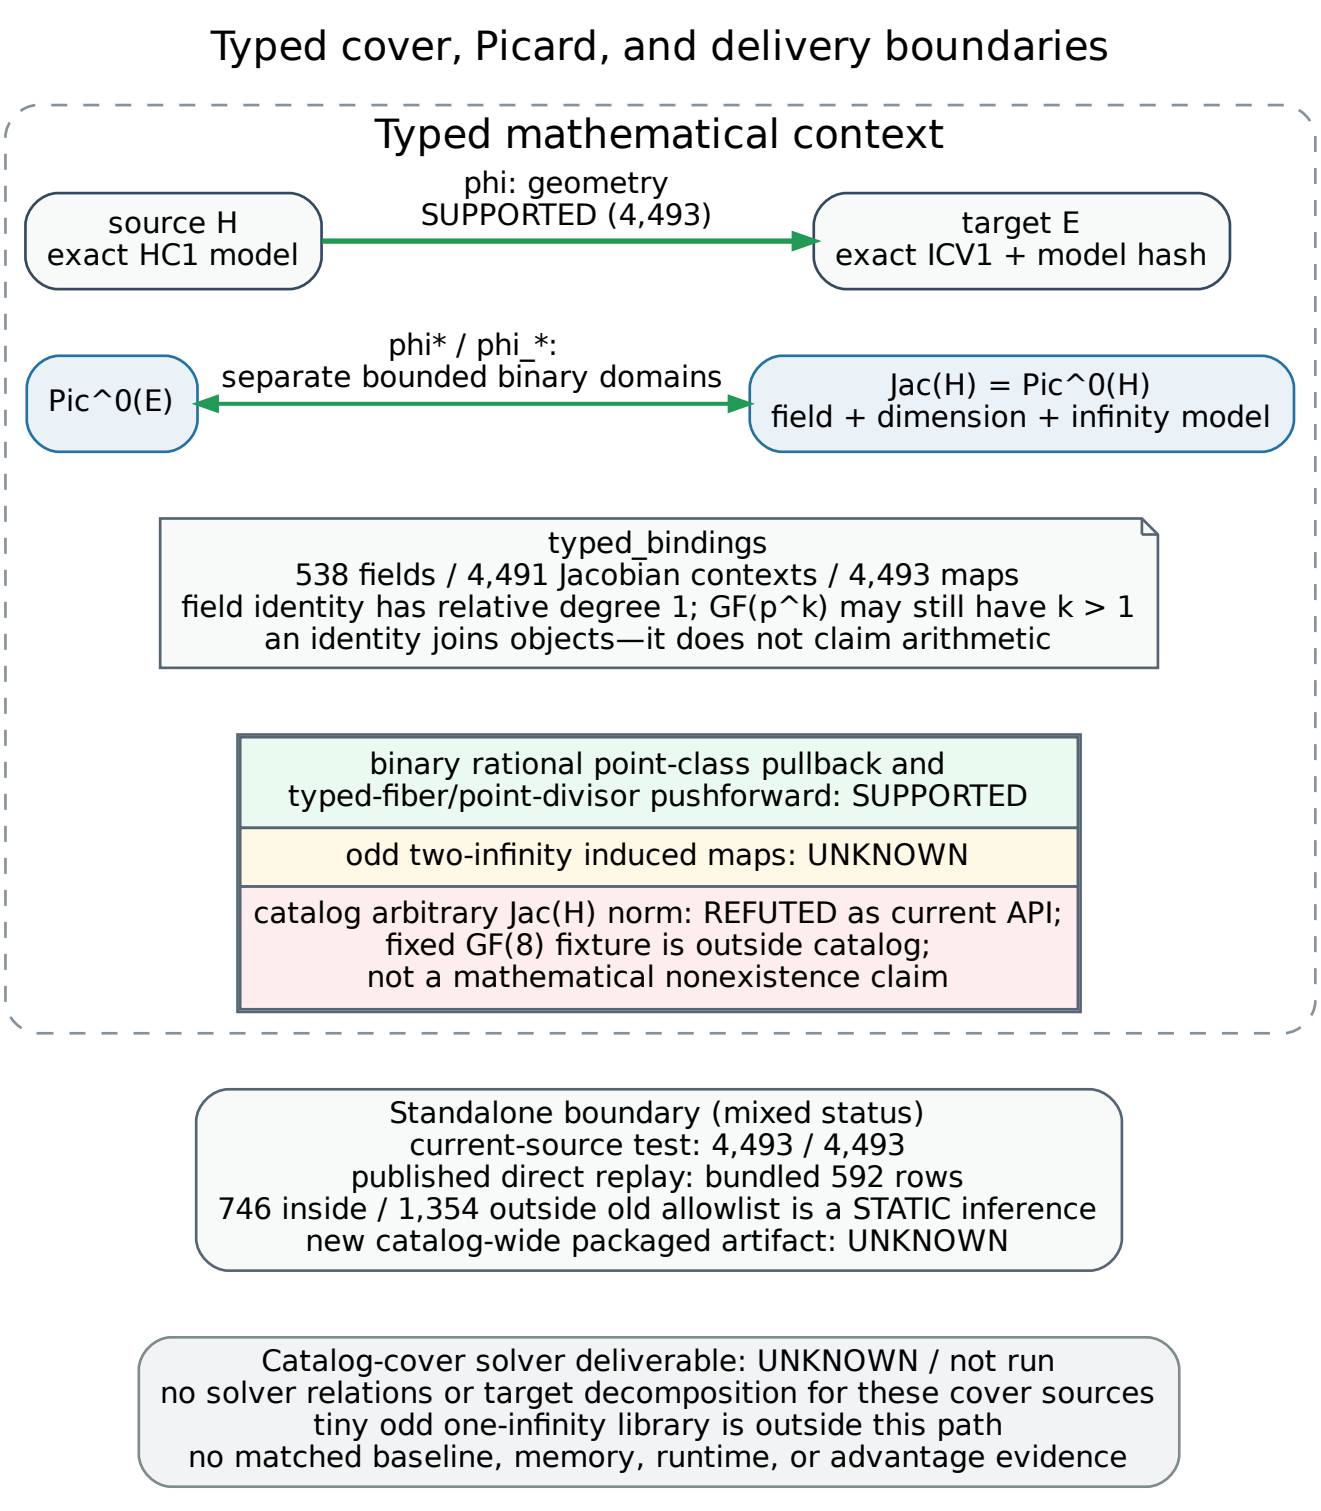
Typed cover, Picard, and delivery boundaries
Typed mathematical context
source H
exact HC1 model
phi: geometry
SUPPORTED (4,493)
target E
exact ICV1 + model hash
Pic^0(E)
phi* / phi_*:
separate bounded binary domains
Jac(H) = Pic^0(H)
field + dimension + infinity model
typed_bindings
538 fields / 4,491 Jacobian contexts / 4,493 maps
field identity has relative degree 1; GF(p^k) may still have k > 1
an identity joins objects—it does not claim arithmetic
binary rational point-class pullback and
typed-fiber/point-divisor pushforward: SUPPORTED
odd two-infinity induced maps: UNKNOWN
catalog arbitrary Jac(H) norm: REFUTED as current API;
fixed GF(8) fixture is outside catalog;
not a mathematical nonexistence claim
Standalone boundary (mixed status)
current-source test: 4,493 / 4,493
published direct replay: bundled 592 rows
746 inside / 1,354 outside old allowlist is a STATIC inference
new catalog-wide packaged artifact: UNKNOWN
Catalog-cover solver deliverable: UNKNOWN / not run
no solver relations or target decomposition for these cover sources
tiny odd one-infinity library is outside this path
no matched baseline, memory, runtime, or advantage evidence