
Saved analysis001: ten recorded work counts

27 October 2026. One analysis was planned, attempted and completed with status 0 under source b1f58e9d8e08bb3a9e1794166cd69e7556bbffa3. No incomplete, interrupted, resumed or excluded invocation exists. A strict native profiler processed all 21 saved replay004 packets: ten published and eleven omitted group orders. All210 predeclared cells are known. No old certificate unknown was changed or used as a numeric label. No new legacy program or curve sample ran.

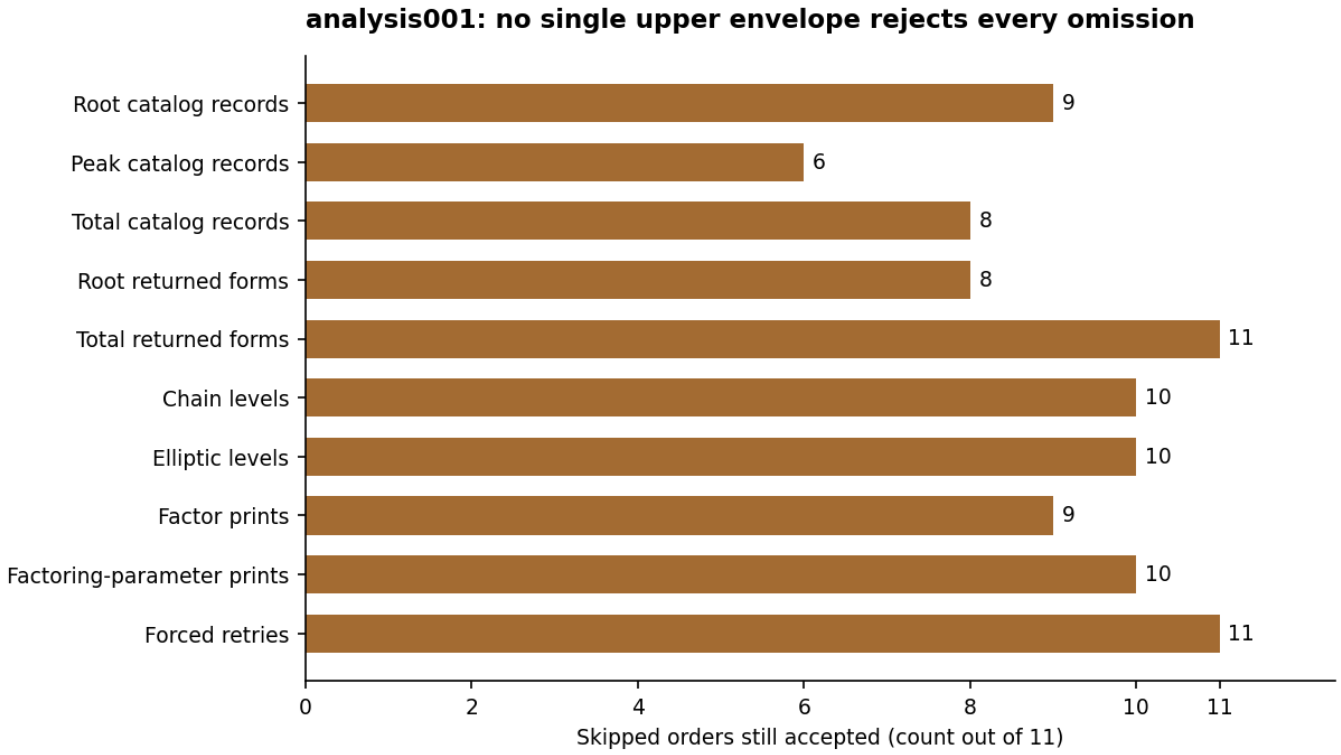

All ten published controls retained by every bound · 21 rows · exact finite counts · labels visible

Each bar shows the native recorded number of omissions retained by one tightest per-field upper cutoff that retains all ten published controls. None of40 single envelopes separates the labels. The joint global upper limits retain eleven omissions; the per-field joint retains p239-1562 and p239-2682. These are exact finite counts with no sampled interval. Labels were visible; there is no blinded prediction, p-value or runtime equivalence.

Command: profiler STUDY SAVED_RUN FRESH_RESULTS, with60second watchdog and 768 MiB address ceiling. Shared local saved-data analysis; host identity and isolation tier unrecorded, wall/CPU/RSS not admitted. No seed or performance reference arm applies. Frozen input/binary checks and ending checkpoint pass. Raw archive paths runs/analysis001/{command.txt,status,stdout,stderr,input-recheck.txt} and source snapshot retain the exact execution. Table, native summary, reproduction.