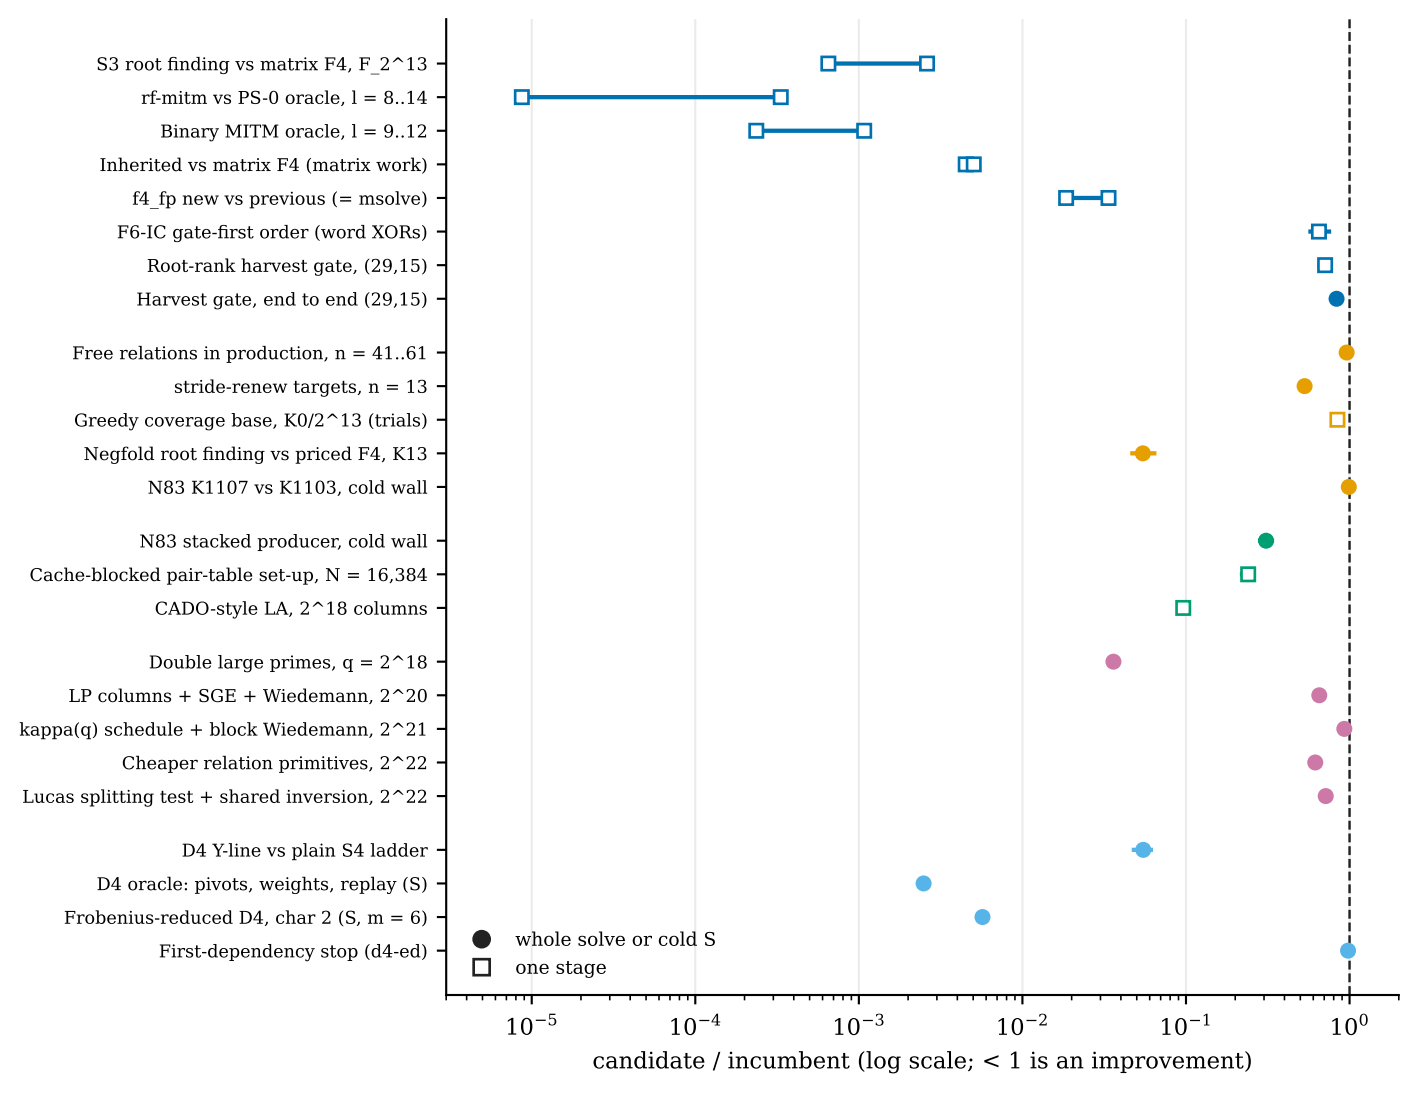
S3 root finding vs matrix F4, F_2^13
rf-mitm vs PS-0 oracle, l = 8..14
Binary MITM oracle, l = 9..12
Inherited vs matrix F4 (matrix work)
f4_fp new vs previous (= msolve)
F6-IC gate-first order (word XORs)
Root-rank harvest gate, (29,15)
Harvest gate, end to end (29,15)
Free relations in production, n = 41..61
stride-renew targets, n = 13
Greedy coverage base, K0/2^13 (trials)
Negfold root finding vs priced F4, K13
N83 K1107 vs K1103, cold wall
N83 stacked producer, cold wall
Cache-blocked pair-table set-up, N = 16,384
CADO-style LA, 2^18 columns
Double large primes, q = 2^18
LP columns + SGE + Wiedemann, 2^20
kappa(q) schedule + block Wiedemann, 2^21
Cheaper relation primitives, 2^22
Lucas splitting test + shared inversion, 2^22
D4 Y-line vs plain S4 ladder
D4 oracle: pivots, weights, replay (S)
Frobenius-reduced D4, char 2 (S, m = 6)
First-dependency stop (d4-ed)
whole solve or cold S
one stage
10^{-5}
10^{-4}
10^{-3}
10^{-2}
10^{-1}
10^{0}
candidate / incumbent (log scale; < 1 is an improvement)