Partition-local presence filter: same-session A/B with its own A/A

One `ic` binary (`430734a6…`, built at `39affc25bf` with `--features scan-probes`) and three labels a round:

- **a** and **q**: `KIC_FILTER_LAYOUT=low`, today's layout;
- **t**: the default, `FilterLayout::Top`. The filter word comes from the hash's top bits, the bits that also pick the build's partition.


Rows are suite `M1-T01` at `k0n53` (2^44.3) and `k0n61` (2^47.2). There are 42 rounds, cycled over the six orders. Each process ran under `isolated_bench --cpus 2` with `RAYON_NUM_THREADS=1` on this session's container (Intel Xeon, AVX-512). The busy gate refused 141 launches, which were retried and are not measurements. `PROTOCOL.md` was committed before any row. Class: engineering. Outputs are identical by construction and by check.

Identity

Zero mismatches: every process of a row gave the same certificates and counts. One k0n53 round was dropped as contended, leaving 41 and 42 rounds.

Result (median of per-round ratios a/t, 95% bootstrap over rounds)

row	metric	A/B (low / top)	A/A (low / low)	verdict; prediction
k0n53	**build**	**1.104** [1.069, 1.142]	1.019 [0.988, 1.045]	**established**; [1.05, 1.25]: held
k0n53	set-up	1.033 [1.007, 1.061]	0.991 [0.957, 1.024]	not established; [1.01, 1.07]: held
k0n53	collect	0.996 [0.948, 1.028]	0.996 [0.965, 1.032]	no regression; [0.97, 1.03]: held
k0n61	**build**	**1.142** [1.098, 1.164]	1.004 [0.964, 1.042]	**established**; [1.05, 1.25]: held
k0n61	set-up	1.000 [0.983, 1.034]	0.997 [0.970, 1.028]	not established; [1.00, 1.04]: held
k0n61	collect	0.991 [0.969, 1.004]	0.997 [0.967, 1.031]	no regression; [0.97, 1.03]: held

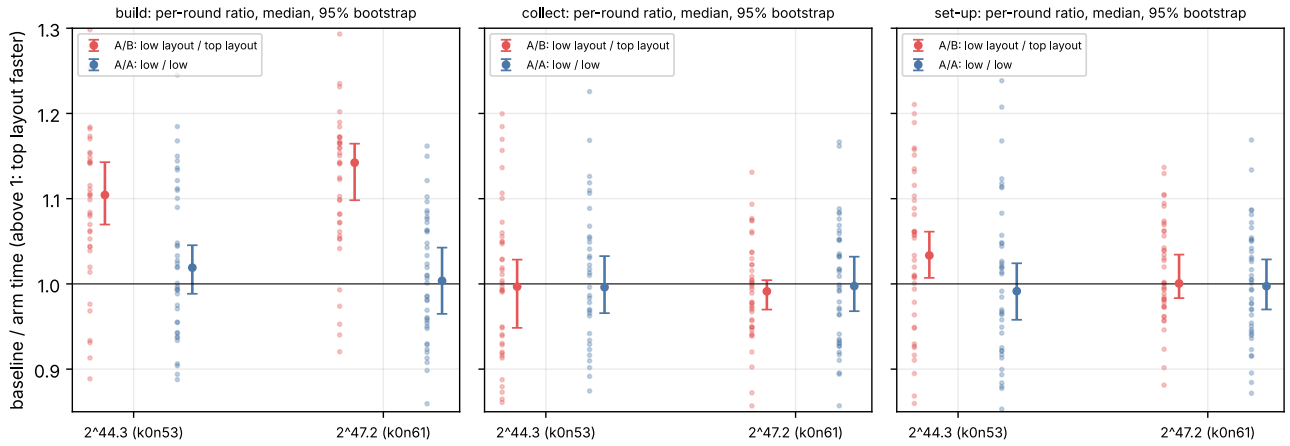

42 rounds a row, labels a q t cycled over six orders; one binary (39affc25bf, scan-probes); Intel Xeon container

Mechanism: build steps, ns per stored pair (median over rounds)

step	k0n53 low	k0n53 top	k0n61 low	k0n61 top
stream push	12.79	12.34	13.76	13.86
counting sort + filter fill	10.69	**7.86**	12.68	**8.38**
additions + keys	6.60	6.56	7.12	7.26
whole	31.05	28.04	34.61	30.09

Only the step the layout touches moves: the filter fill now writes inside each partition's own run of the filter. The arm medians of whole build time agree with the A/B ratios (31.05/28.04 = 1.107; 34.61/30.09 = 1.150).

Decision (frozen rule)

The build gain is established at both sizes, and no collect regression is established at either. So `Top` stays the default for CPU folded builds. The set-up gain is not established: at k0n53 its median is 3.3%, but its lower end (1.007) does not clear the A/A's upper end (1.024). At k0n61 the build is about 15% of set-up, and 14% of it is below this session's resolution.

Scope

A component result for the build phase on this host class. It is not a cold-time claim against rho, and no board row follows from it. A Table A effect would need rule v10. GPU-built tables, table files and the GPU-parity tools keep the low layout.