Projective chart run: 24-bit source order

Session: `ECBS1h02cacd3f7f7e`. **Spec:** `ECS1hbfbd89b1312a`. **Binary SHA-256:** `024f5094fb5d949ef93e6da3dfb404ffcbe79efbe5e1aa466886d393542a7b80`. **Started:** 20261020T0644Z UTC. **Isolation:** L0 operation counts, `--cpus none --allow-busy`; wall time is unqualified.

The frozen session requested and completed 540 arm records on 180 exact-order targets: projective chart, unchanged affine two-choice collector, and source negation rho. All 540 records were source-verified; no failure or exhaustion was recorded. The independent `verify --replay-all` audit is in `replay_projective_chart_v2/order-genus-24.json`.

At M+0.5S+10I and 0.1M per declared native logical operation, the candidate/reference ratios are 0.679788 against affine and 2.875026 against rho. Each ratio divides sums of complete cold one-target costs over the same 180 targets.

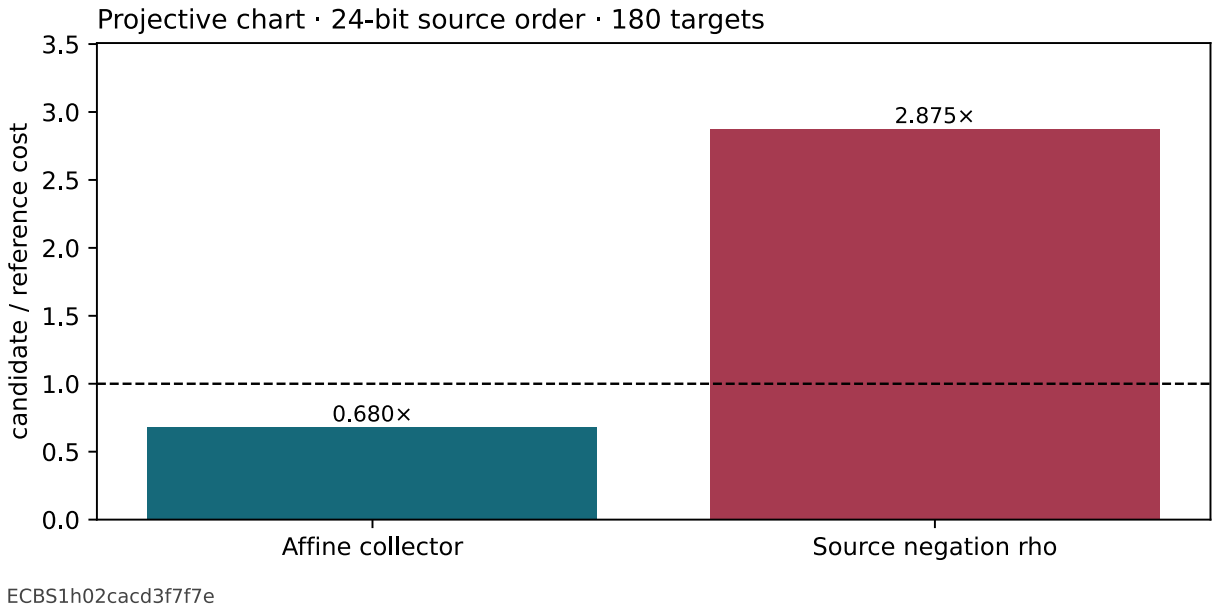

Figure 1: Recorded pooled operation-cost ratios; 180 paired targets; session ECBS1h02cacd3f7f7e. Dashed line is equal cost.

Raw evidence: `sessions_projective_chart_v2/order-genus-24` (packed in `sessions_projective_chart_v2.tar.zst`); native analysis source `native/genus2_projective_analyze.rs`. Price-grid scope is M/S/I plus declared native logical operations; it does not establish wall speed or compare an external implementation.