Result: N83 K = 16,627 selector-pinned control

Result: `PASS_SELECTOR_PINNED_WITNESS`, 2026-10-18 08:32:07–08:32:43 UTC. The complete four-summand orbit-domain model had 201,598 variables, 5,915,238 clauses and 3,901 XOR rows before exact choice pins.

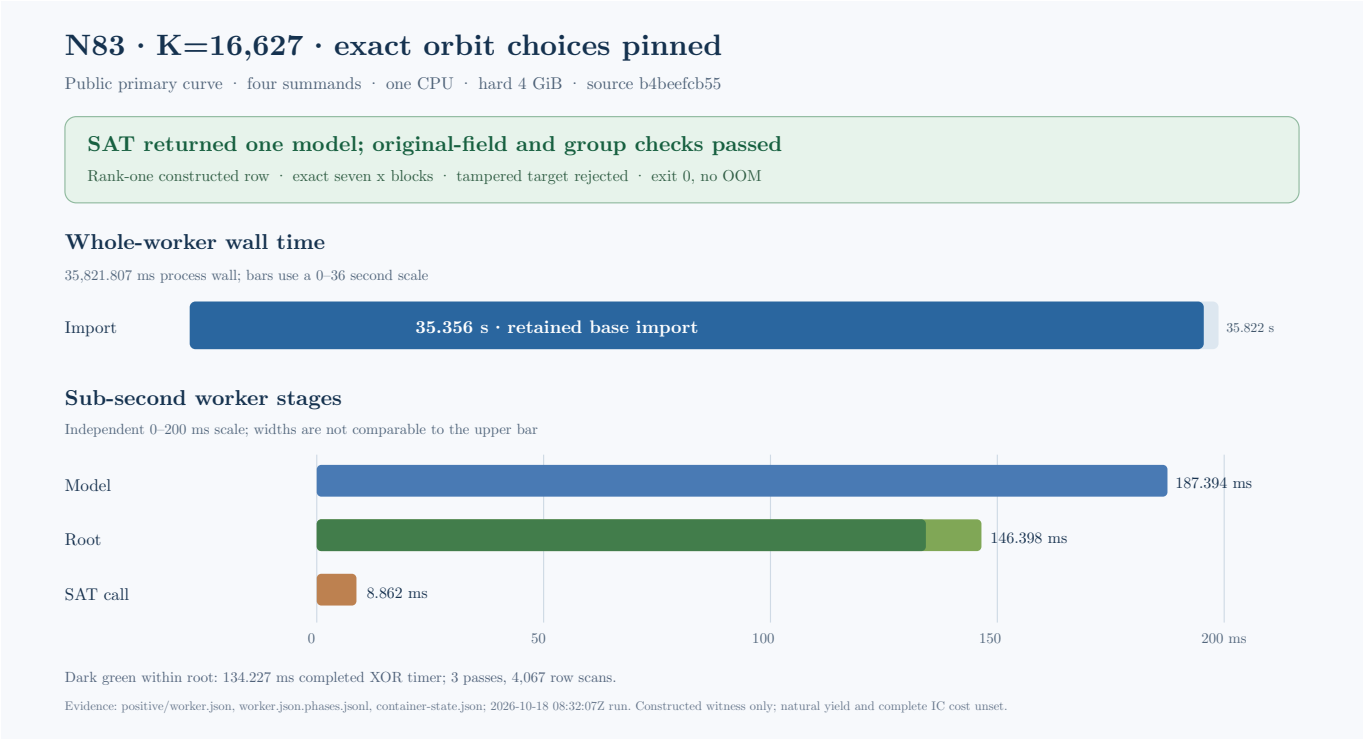

The worker imported the retained base in 35,356.152683 ms, constructed the model in 187.394292 ms, reached a root fixpoint in 146.397875 ms and returned one SAT model in an 8.861792 ms search call. The 35,821.806933 ms worker wall is a cold stage diagnostic. The one-CPU Linux container had a hard 4 GiB limit and zero swap; it exited 0 without OOM at a 2,662,318,080-byte peak. The constructed relation for indices `[0, 166, 332, 498]` passed original-field S3, exact x-block, stored-point group, rank-one and tamper checks recorded in `positive/worker.json` and its phase stream. The separate native `replay/receipt.json` recomputed the relation from the stored object and rejected two tampered receipts. It did not replay the SAT assignment bits, which the worker did not export.

The earlier unconditioned search reached its 1,800-second cap under a different source revision and without the choice pins. These values are not a paired speed ratio. Natural-query relation yield and useful rank, factor-base selection across m = 2, 3 and 4, complete cold IC cost and matched-rho gap remain open. The next frozen comparison separates selector and phase pins under one source. See `RUN_REPORT.md` for exact provenance and raw paths.