Two-workspace lock gate

[pcc:unverified] Source-only prospective implementation; T-2112. No compiler, tests, lock generation or payload.

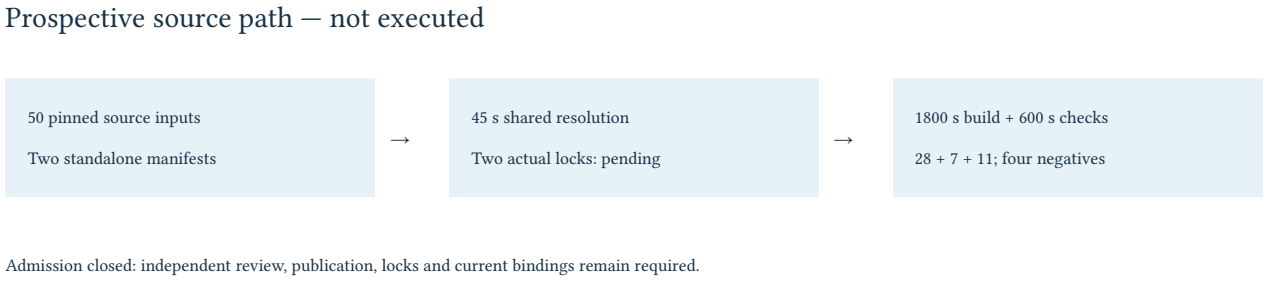

Concrete source changes

Resolves driver and standalone adapter locks sequentially under one shared 45-second resolver deadline within the original 60-second reservation. The rustc proxy only permits the pinned version query. The 50-file inventory includes the exact pre-existing driver-controls.rs. The worker stages independent actual locks at the driver and adapter workspace roots. Adapter compilation selects its own manifest and reporting feature. Trace acceptance compares published revision, staged pruned source hash, workload, run ID and complete native header. The producer's source_verified Boolean remains only a scalar-result check. The deliberate first header-write fault has an empty prefix and position zero. Its identity is explicitly unavailable; all other emitted qualification traces require the expected header. Two source-written identity rejection controls are present but unexecuted.

Preserved panel and limits

Exact 28 signed cases, seven Labels cases, 11 native driver calls, forced-fallback and zero-vector probes, and four adapter negatives remain. Combined reservation is 2400 seconds: 1800 build plus 600 execution; 2 CPU / 16 GiB, one attempt without automatic retry. The lock gate preserves 60 seconds total and 45 shared resolver seconds, 1 CPU / 2 GiB, private network and version-only rustc proxy. Both resolutions charge the same deadline.

Pending admission and evidence

Actual driver and adapter locks are null. Source publication, lock publication, deadline, fresh cache, owner, ledger and independent review are pending. The combined loader retains its exact 43200-second suballocation check; the enclosing campaign's larger ceiling is not substituted. No runtime completion or cost ratio is measured. PDF, SVG, CSV, JSON and source patches represent the proposed construction only. Earlier evidence remains unchanged.