Reviewer-pattern appendix

Reporting-only regrouping of the frozen four-follow-up packet


Scope. This appendix reads the existing standardized target and price-grid CSVs. It does not execute a collector, solver, replay, matrix, nullspace, or recovery routine. Candidate/rho target rows use $M + 0.5S + 10I$ and 0.1 GAE per native logical operation. The sensitivity table retains all 36 declared price cells.

Row accounting. The paired-delta table contains 12,850 standardized observations. Of these, 11,586 have source-verified candidate and rho costs. Four pencil cap attempts retain null candidate costs. Another 1,260 coordinate-only Kummer rows retain their label and Recover checks but have no DLP candidate cost; they are excluded from all cost plots and statistics.

Arm	observed targets	ratio of summed costs	descriptive 95% interval
Factor base, full 16	1,260	2.448830	[2.259778, 2.698797]
Projective, retained state	1,260	4.179297	[3.918669, 4.466616]
Kummer, differential uncached	1,260	14.356662	[13.324769, 15.208447]
Pencil, degree peel	541	905.826373	[329.389077, 1548.138301]

Intervals are 10,000 deterministic resamples of whole observed curve models and are labelled descriptive. The pencil interval uses only its observed models and retains 719 arm-specific missing targets. It is not a full-cohort estimate.

ECDF accounting. Each arm is expanded to all 1,260 workload keys. The solid pencil curve is conditional on 541 verified degree-peel rows. At each observed rank, dashed curves place all 719 missing ratios above or below that threshold. All conditional and bound curves are rendered as right-continuous empirical steps. The CSV retains an explicit null row for every missing arm/workload pair.

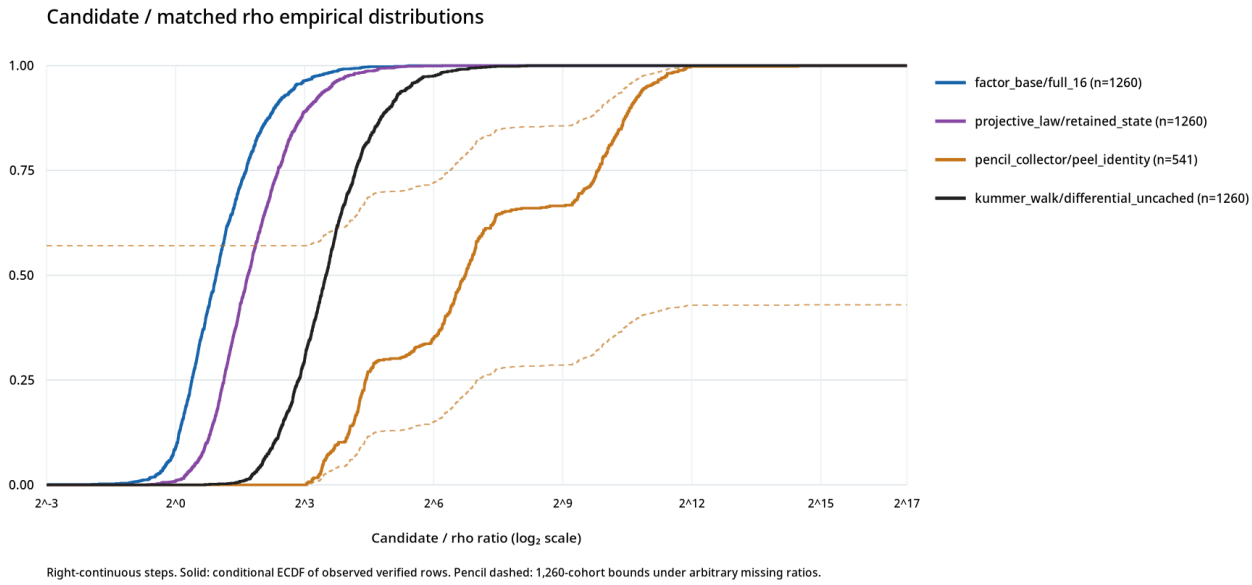

Price sensitivity. Each panel contains three square prices, four inversion prices, and three native-logical prices. The factor-base, projective, and Kummer panels copy complete 1,260-target aggregate rows. The pencil panel sums candidate and rho costs across its ten observed curve aggregates before division (541 targets). Numeric labels are candidate/rho ratios; color is logarithmic across the displayed 144 cells.



Break-even surface. For every one of 85 complete grid groups, `break-even.csv` reports integer operation-count differences and checks all 36 cells. With $U = 9 + 4S + I$, equality is

$$d_M + d_S S + d_I I + d_L N(9 + 4S + I) = 0.$$

The maximum per-group absolute and relative reconstruction residuals are included in the CSV. "Exact" denotes the unique integer coefficients implied by the 36-cell grid arithmetic; this appendix does not recount source JSON operation counters. N5 remains partial: phase fractions are absent because the standardized cross-lead target schema has no common phase-counter columns; no fractions are inferred from total costs.

Review files. `paired-deltas.csv` preserves losses, wins, cap nulls, and coordinate-only exclusions. `ecdf.csv` preserves conditional and cohort-bound values. `descriptive-tails.csv` uses nearest-rank empirical quantiles. `cluster-bootstrap.csv` records seeds, sample sizes, and interval labels. `price-cell-heatmap.csv` and `break-even.csv` contain the plotted and algebraic source values.