Native redirected-log ownership qualification

The single native fixture recorded passed in 3.339560756983701 seconds; caller elapsed time was 3.408079123997595 seconds and exit was 0. Conservative accounting charges 60 active worker-seconds. No compiler or scientific target ran. Source publication is 800e454e809a079edd85a2c906b243b9a4d6ba3b; the exact fixture source SHA matches its reviewed 9bf9b24a binding.

Observed file and ownership behavior

The caller created stdout and stderr files before systemd append redirection. Both actual files contain their exact 27-byte sentinels and have UID/GID 1000 and mode 0600. Worker and supervisor prefix records match each other and independent SHA256 hashes of the retained files. Prefix records explicitly retain sealed=false; a successful fixture does not change those fields into sealed manifests.

The fixture injected one checkpoint OSError after the actual extracted show function captured native ownership. Its receipt records ownership_survived_checkpoint_failure=true. Initial and worker invocation identities both equal 9a260668ffe94e34ae85562a76223904. The fixture then recorded owned_cleanup=true and terminal MainPID=0, inactive/not-found state. The captured cgroup is absent during this archival readback. No additional independent manager-journal replay was performed.

Resource bounds and scope

Native controls recorded CPU quota100000/100000, memory134217728 bytes, zero swap and32 tasks. The unit used UID/GID1000, private network, read-only system/home and only the fixture output writable. Native runtime was bounded to35 seconds plus5-second stop grace; controller budget50 seconds and external55+5 seconds preserve the60-second allocation. CPU time and peak RSS were not recorded. No automatic retry occurred.

The archival check read actual log metadata/bytes, raw worker/result/caller records and the pinned fixture source. It found no mismatch and did not rerun the service. This result covers real redirected-log ownership/read/flush and retained ownership following one injected checkpoint failure. It does not establish compiler success, all supervisor faults or physical crash durability. The earlier failed full validation remains a separate immutable attempt and debit.

Reviewable artifacts

The packet supplies CSV/JSON, SVG and this PDF. The diagram shows the executed ownership sequence; two equal-length sentinels are not a performance comparison. Nine raw native/caller files are archived with individual hashes. The content-addressed archive is2163 bytes, SHA2564cee4cc770d31093cbcbab072aac798e653e98db5d9b228ad7db8ed891baa669. Artifact upload, remote verification and a separate full GET/SHA check preserve the exact bytes. Use .artifacts.json and raw-manifest.json to retrieve and verify it.

Observed native log ownership sequence

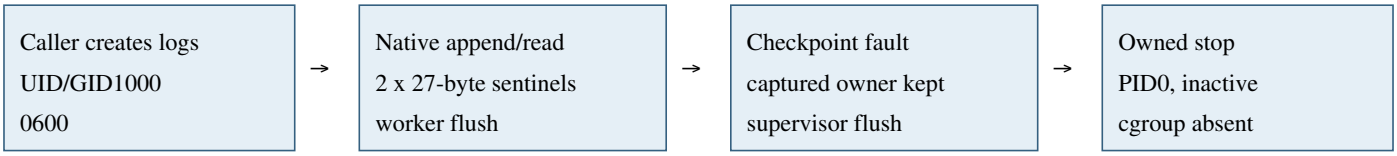

Run t1971-root-log-qualification-20261109. Recorded elapsed3.339561seconds; charged60seconds.

Scoped native log fixture; no compiler or scientific workload.

Native ownership observations; no runtime comparison.