
The historical pure S5 miss is matched to a complete fixture result

historical-s5-match-v3 compiles and exits zero at the matching step. This closes the source-and-record binding obligation for one historical residual. It does not repair or rerun the original tagged solver.

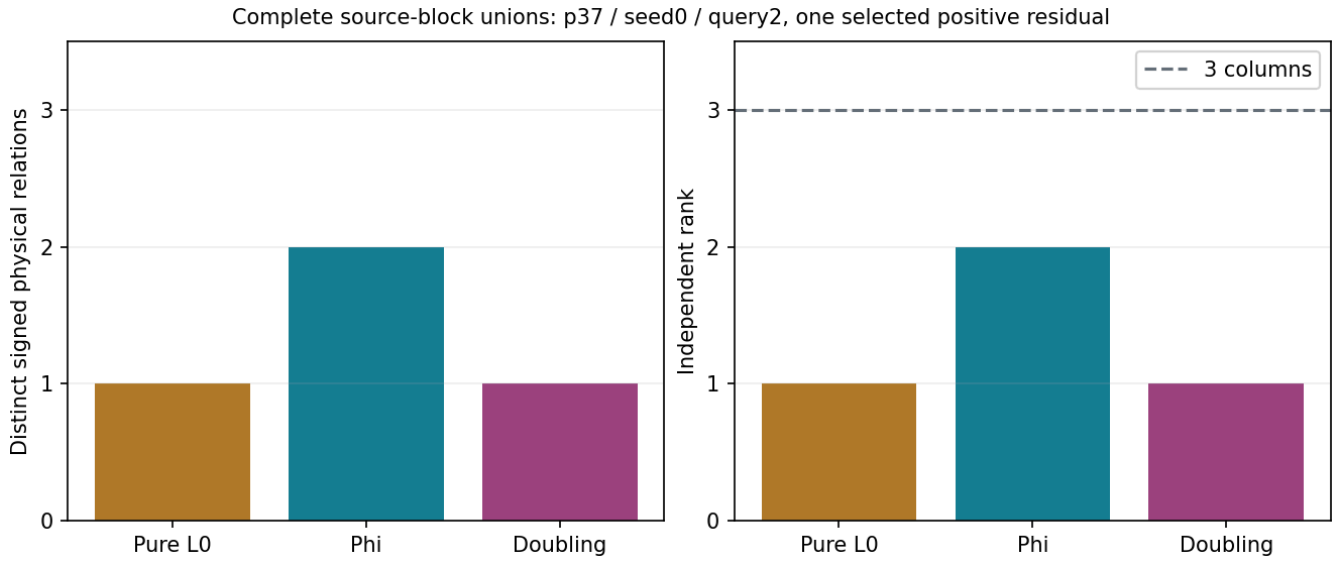

Exact binding and controls

The checker uses source commit 9b9e3dad0a7b4638624759953760f8160bda865b, including the diagnostic syntax correction. Its actual source hashes, immutable runner hash, exact commands and exits are retained in runs/historical-s5-match-v3/metadata/. It compares every one of the 13 public keys with the frozen export projection. All 61 query pairs and their order match; only the raw oracle-count column is removed.

The historical pure k=0 case is p37, seed 0, query 2, with public query coefficients a=1,798,499; b=300,441. The earlier degree-30 record is partial and returns no polynomial relation. Its reference tuple is exactly the completed pure source-block solution's tuple: [(5,-1),(21,-1),(23,1),(24,1)].

That solution has complete native roots and passes the separate signed-set/RREF audit, with one physical relation and rank 1/3. The chart shows the already recorded three-arm fixture, not three new solves. The pure tuple's source presentations occur in all three blocks; their union contains one relation.

All four corruption controls reject: changed public coordinate, changed query coefficient, omitted tuple and truncated public trace. The full result and input/audit hashes are copied to results/historical-s5-match-v3/summary.json (SHA-256 680a317ae18937b21a45922dbabc1086b612054e2e59fc2a355389c8d07e4fbe). Its diagnostic JSON is retained separately.

Scope and resources

This checker reads saved records; it runs no collector or BSGS oracle. The shared busy reservation covers build and match. Matching has one worker, an 8 GiB address-space cap and a 60-second watchdog after separate compilation. No elapsed time or complete-cost gain is admitted.

The two quartic field constructors choose the same first nonsquare; compatibility is a separate source audit, not retroactive execution attestation. The historical report carries no complete runtime input hash. This pass therefore establishes no retroactive runtime seal, whole-61-query collector completion, generic ideal equality, IC gain or complete price. Both failed checker attempts remain preserved.