Run report: E2 cofactor ladder, 2026-10-19 22:13 to 22:35 UTC

Observations only. The interpretation is in `../../E2.md`.

item	value
what	experiment E2 of `research/generator_effect_ic_20261019` (PROTOCOL frozen in `E2.md`, commit `abc53177e`)
specs	`e2/specs/h{1,2,4,8,16}-c{1..8}.json`, 40 specs, one curve each
command	`ecbench run --spec e2/specs/hH-ci.json --out e2/records/hH-ci --lock $TMPDIR/e2-hH.lock`, five `h` streams in parallel
binary	`target/release/ecbench` built from `abc53177e` (`binary_sha256` in every record)
host	one shared macOS host, `--cpus none` (no CPU topology on this OS), isolation level earned L0 on every run
workloads	40 curves (`e2/curves.jsonl`), 24-bit `p`, `a = −3`, `#E = h·r`, `h ∈ {1, 2, 4, 8, 16}`, 8 per `h`; 768 `planted_shared` targets per curve, target seed 20261019
arms	`rho-neg`; `ic-abscissa` (`prime-abscissa:size=B`); `ic-knownlog-random` (`known-log:size=B,scalars=random,seed=20261019`); `ic-knownlog-random-aa` (`seed=20261020`); IC arms `mitm:negation_folded=1,m=2`, `B = ⌈#E^{1/3}⌉` per curve
measurement	1 round, no warm-up, order alternate, seed 20261019, timeout 600 s
runs requested / completed	122 880 / 122 880; **122 880 verified**, 0 exhausted, 0 errors, 0 timeouts
audit	`ecbench verify` OK on all 40 sessions; `--replay 16` reproduced 16 of 16 on `h1-c1` and `h16-c8`
wall	about 22 min for the 40 sessions; summed in-method solve time 505 s (wall time is reported as run time only, not used in any result)
raw records	`e2/records/h{H}-c{i}/` (`records.jsonl.gz`, `plan.json.gz`, `session.json`, `spec.json`, `host.json`)
aggregation	`examples/generator_effect_e2_summary.rs` → `e2/summary.json`

Measured values (unit S = GAE / √r; yields in relations per target tried; 90% bootstrap intervals over targets within curves, 10 000 resamples):

h	yield, abscissa	yield, known-log	yield ratio	S abscissa, w = 0 / 1	S known-log, w = 0 / 1	S rho, w = 0 / 1
1	0.00864	0.00871	1.008 [0.987, 1.030]	19.81 / 28.49	17.76 / 17.83	1.11 / 2.11
2	0.00845	0.01702	2.015 [1.972, 2.057]	27.83 / 38.90	25.23 / 25.27	1.11 / 2.08
4	0.00865	0.03455	3.997 [3.915, 4.084]	37.98 / 51.31	35.14 / 35.17	1.16 / 2.23
8	0.00855	0.06696	7.832 [7.676, 7.991]	52.56 / 68.54	49.63 / 49.65	1.22 / 2.31
16	0.00884	0.13253	14.99 [14.70, 15.29]	71.12 / 89.31	68.75 / 68.77	1.32 / 2.45

Pooled yields are relations found over targets tried across 6144 runs per arm per `h` (derived from the records' `relations_found` and `targets_tried`). The per-`h` intervals and every other ratio are in `e2/summary.json`.

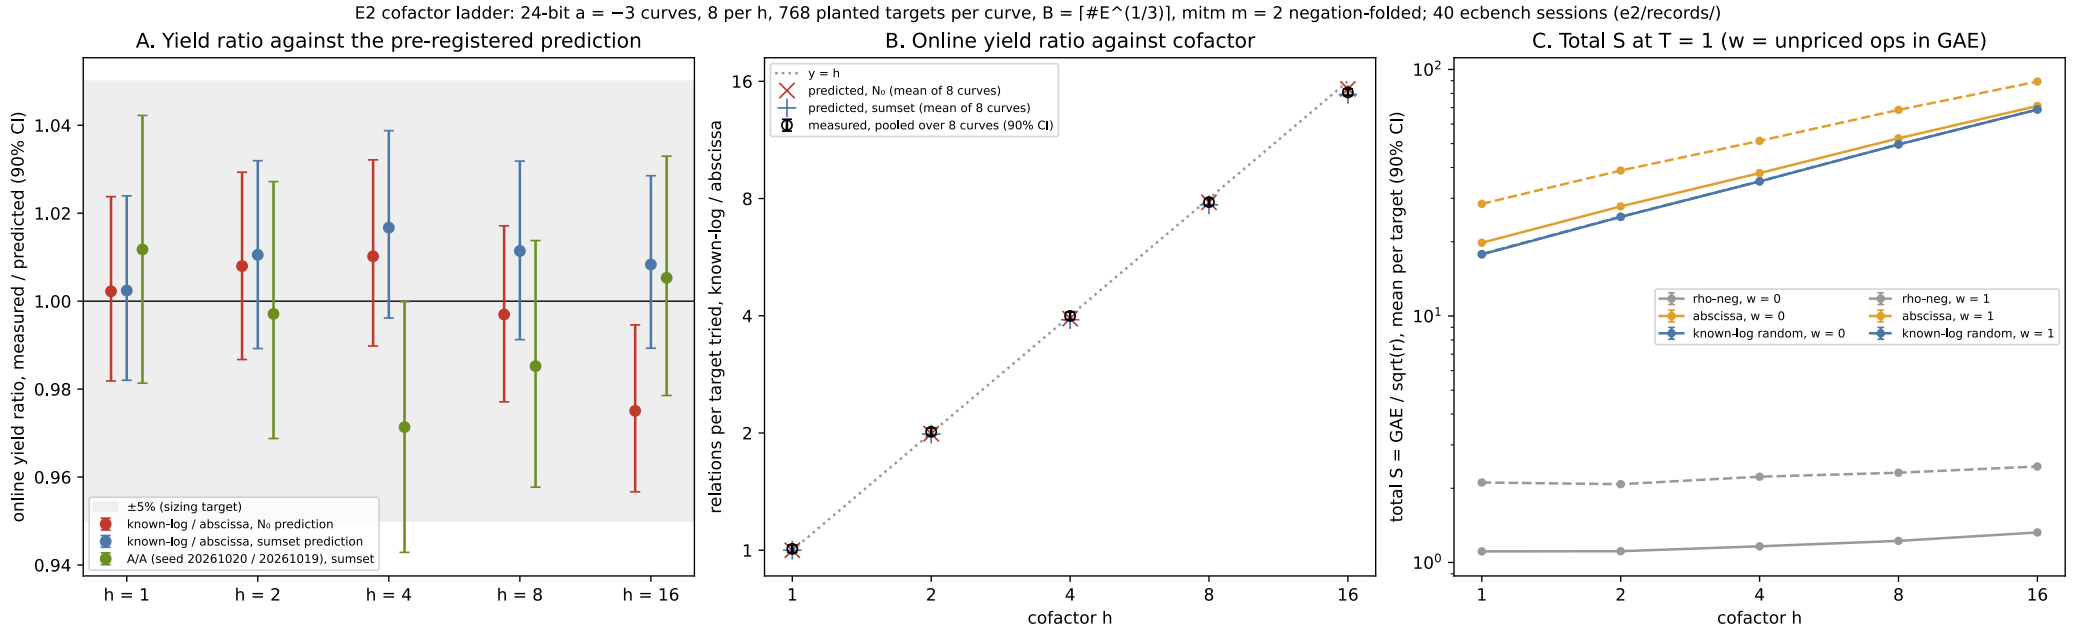


Figure 1: E2 run

Figure. The E2 figure (`e2/plot_e2.py`, recorded values only): yield ratio against prediction, yield ratio against `h`, and total S per arm. 40 sessions, ids in `E2.md`.