CPU arithmetic: complete recovery screen

Observations only; no certified latency claim or hypothesis promotion. Run: `hashed-ecdl-cpu-round3-20261030`, October 29, 2026 PDT.

The candidate applies exact Euclidean inverses, finite-difference constructor loops and fixed-base multiplication tables. Baseline u is the already optimized CPU implementation at `2bd4588fba60`; candidate v is `8ca08633a12b`. This is a bundled implementation comparison, not attribution to individual changes. Host: Intel Xeon 6975P-C, one software thread, two reserved vCPUs and 4 GiB, shared EKS VM (L0). Same compiler/release flags and fixed public fixtures.

Fixture	Baseline u, ms	Candidate v, ms	A/A x, ms
8-bit / 3 slots	0.386900	0.193202	0.386876
16-bit / 3 slots	5.742763	2.040574	5.726613
16-bit / 4 slots	5.964579	2.335476	5.987033

Recorded medians: 9 repetitions after 1 warmup per cell. Derived u/v median ratios: 2.003, 2.814, 2.554. These diagnostic ratios do not reach the requested further 10x target. No strict-isolation performance result is established.

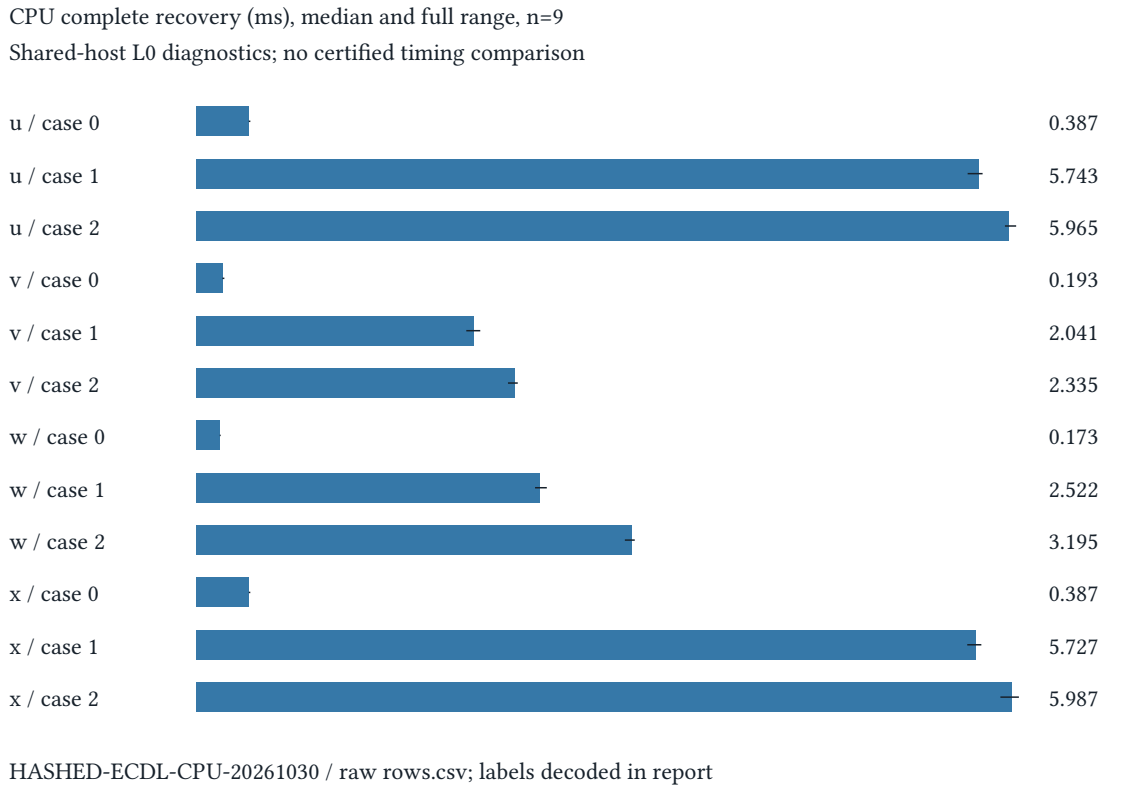

All 120 executions completed: 108 measured and 12 warmups. The frozen native analyzer compared all complete certificate bytes across four arms. Every run checked the known scalar, replayed the certificate, and rejected corruption. Arm w uses candidate batch 1; v uses batch 64. Complete intervals include constructor/known-target setup, scalar tables, all trials, relation collection, elimination, internal and second replay, and serialization. Process launch, archive I/O and the negative control are outside the interval.

Candidate constructor medians: 0.728172/0.691823 ms on the 16-bit fixtures; oracle medians: 0.579318/0.811363 ms. These remain substantial counted phases. The original 20–40-bit ladder is still unresolved. No largest-feasible-scale, matched-rho or fastest-tool claim follows. Memory counters are table capacities, not RSS. Do not pool these durations with earlier panels on a different host.

Protocol: `3ed2015b8b5b0607fcf565011d49c18480be79929e20b00f69606dda36dee5ac`. Raw rows, summaries, full certificates and checked export: `round3/results/`. Source/binary hashes: `round3/results/build.json`; job/pod receipt: `round3/status.json`.