Run report: ecbench session `ECBS1h5394ca2448f0` (e-m17-ic-t0), 2026-10-27T00:11Z

Part E, `m = 17`, IC on target 0 (checkpointing binary). Spec `specs/SPEC-E-m17-ic-t0.json`. Binary sha256 `ad1dd91a…`, commit `2cdffcf22` (clean). Host: Xeon @ 2.10 GHz, 4 vCPU, one core per session (isolation level L1 or L0, recorded per run: wall time is descriptive only). The session completed: every planned run was recorded.

arm	workload	m	status	S	GAE	trials	relations	wall (h)
ic-wied	`Wd5f7dba84d0e`	17	verified	0.8416	1.022e+10	6117400	32242	3.699

All values are recorded fields (`S` = `cost.s`, GAE = `cost.total_gae`, trials and relations from `counters`, wall = `time.solve_wall_ns` ÷ $3.6{\cdot}10^{12}$); no run here is a replay. Records: `sessions/e-m17-ic-t0/records.jsonl`. Audit receipts: `audits/`.

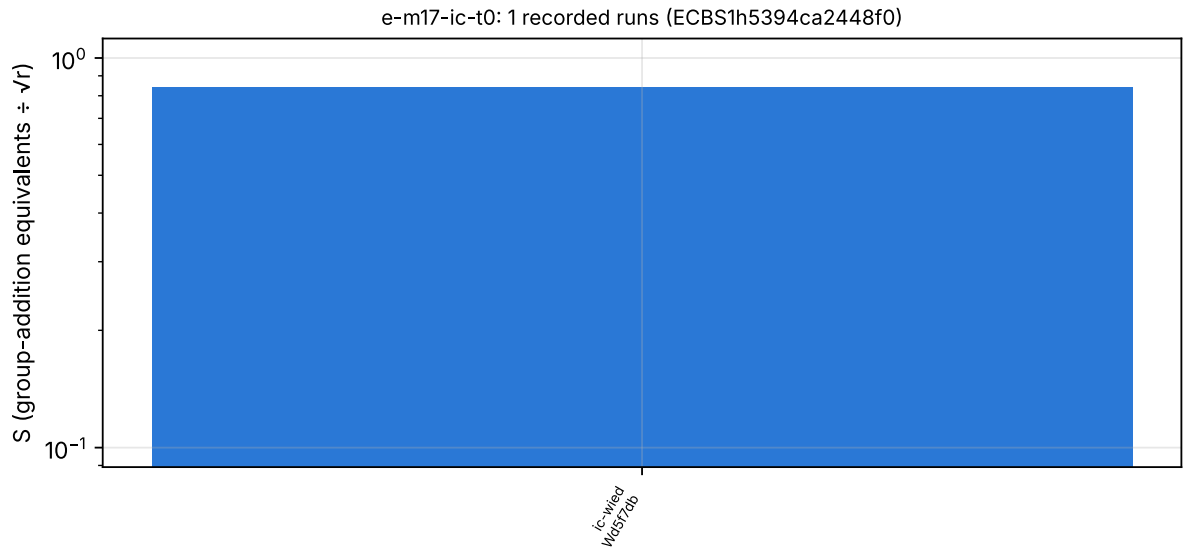

Figure 1: Recorded `S` per run, session `ECBS1h5394ca2448f0`.