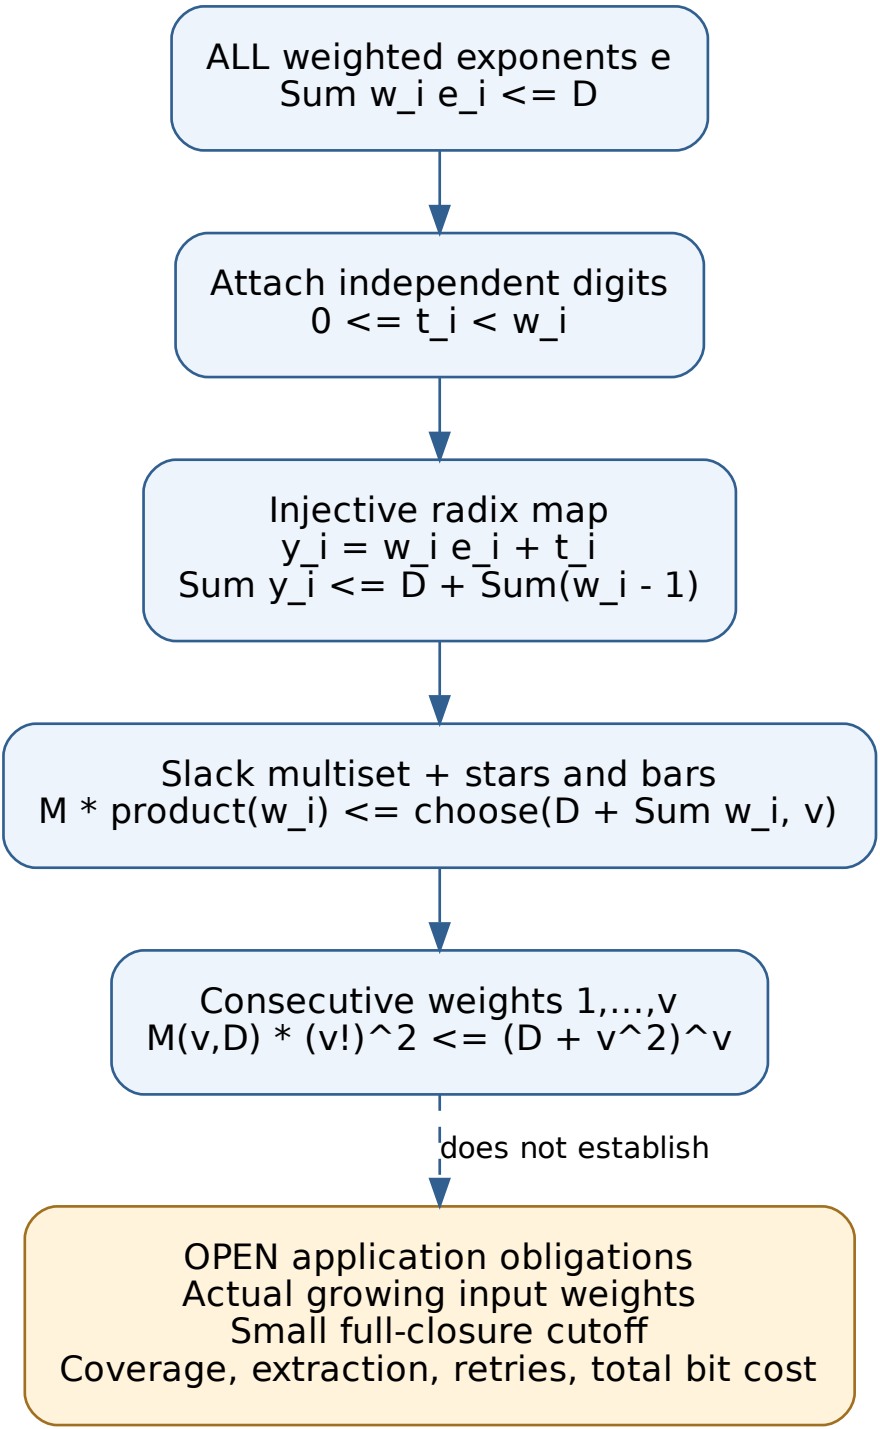
ALL weighted exponents e
Sum w_i e_i <= D
Attach independent digits
0 <= t_i < w_i
Injective radix map
y_i = w_i e_i + t_i
Sum y_i <= D + Sum(w_i - 1)
Slack multiset + stars and bars
M * product(w_i) <= choose(D + Sum w_i, v)
Consecutive weights 1,...,v
M(v,D) * (v!)^2 <= (D + v^2)^v
does not establish
OPEN application obligations
Actual growing input weights
Small full-closure cutoff
Coverage, extraction, retries, total bit cost