
Native N83 factor-base sweep: 100000-conflict continuation

Public synthetic curve icv1-f2m83-tm6151469093347-debefd74, a=0 over x^83+x^45+x^2+x+1; subgroup order24178516392307962166856 89. This is the negative-trace primary curve, distinct from the positive-trace N83 cold leaderboard holdout. Full sources, protocol, raw records and publication receipts are linked in REPORT.md beside this PDF.

The user requested higher conflict caps for K2048 and K4096 and complete raw S3 preservation. The separately committed protocol raises each cap from10000 to100000 conflicts with900seconds per worker, K2048 then K4096, no automatic retries. Maximum new worker allocation1800seconds; readiness, audit, rendering and storage are separate overhead. Older1000 and10000-conflict trials remain separate, immutable observations of the same retained public query.

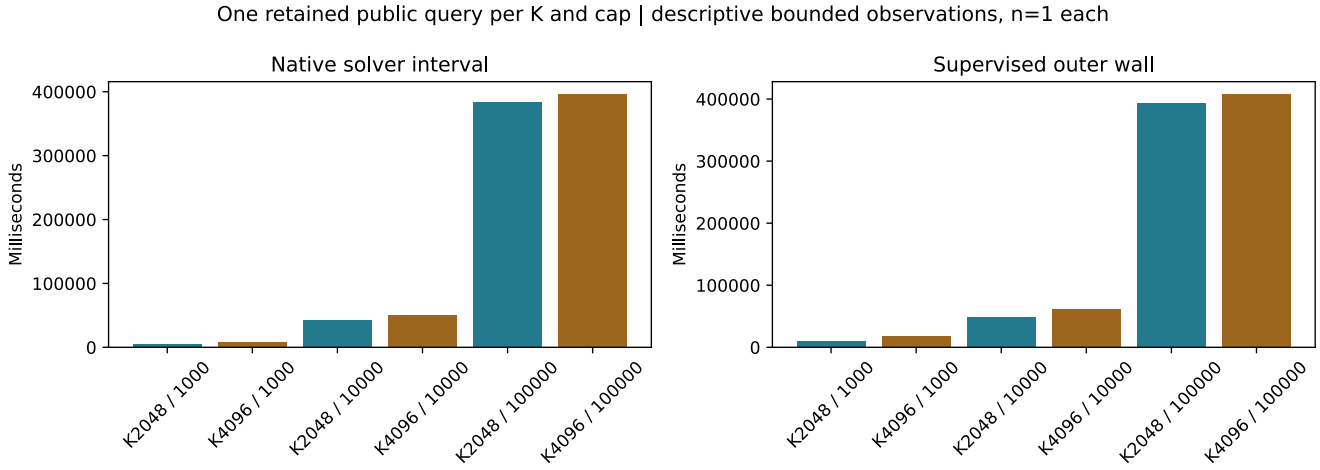


The native summary derives solver intervals as solver_return.elapsed_ms minus solver_enter.elapsed_ms. Return-phase timestamps are not solver durations. A censored prefix supplies no terminal counter or complete solver duration. The outer wall includes supervision/setup and is a different interval. These are descriptive single observations at each K/cap, without an A/A interval, timing-rank admission or fastest-tool claim.

Both new trials completed100000conflicts with zero models, relations and rank. Native bounded-zero-relation query replay and director receipt/digest checks passed for each. Neither hit the900-second wall limit or OOM. K2048 solver interval383937.390858ms, outer393756.253810ms; K4096 solver interval395987.838978ms, outer407619.165871ms. One observation per K; no useful natural relation, full-cold winner or IC/rho ratio is established.

Exact outcomes, validation and evidence

K / cap	Conflicts	Native audit	Solver ms
K2048 / 1000	1000	PASS NATIVE BOUNDED ZERO RELATION REPLAY	4861.868809
K4096 / 1000	1000	PASS NATIVE BOUNDED ZERO RELATION REPLAY	7814.674415
K2048 / 10000	10000	PASS NATIVE BOUNDED ZERO RELATION REPLAY	42413.639201
K4096 / 10000	10000	PASS NATIVE BOUNDED ZERO RELATION REPLAY	50433.062636
K2048 / 100000	100000	PASS NATIVE BOUNDED ZERO RELATION REPLAY	383937.390858
K4096 / 100000	100000	PASS NATIVE BOUNDED ZERO RELATION REPLAY	395987.838978

Frozen higher-cap continuation | prior trials are separate observations

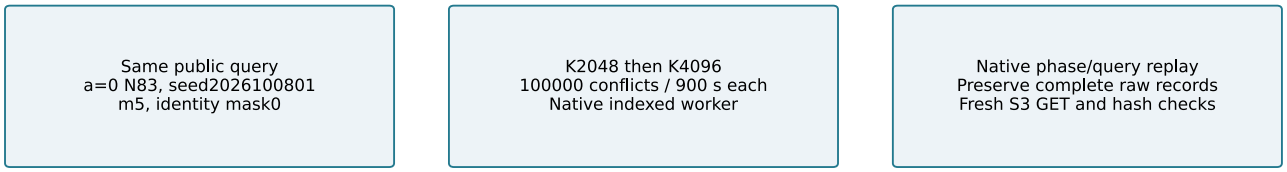

Preserved setup failures: missing relay parent; unignored JSON streams. Neither launched a solver.

The unchanged indexed natural worker SHA2563a31bd2bedee5519d30b517f39ec27f72561ce898213657688c55b51bbcdf7b6 uses the same seed2026100801 single public query, m5 and identity mask0. Native replay verifies query aG+bQ over the original field/group, phase order, input/source/ELF/stream custody and declared limits, exit/OOM and cleanup. Positive observations stay fail-closed until original-group/rank/scalar replay supports them. Unknown is not UNSAT or a proof of absent decompositions; zero yield at a finite cap cannot select an optimal base.

Immutable runner-preflight-v4 and image541096ae9b05… retain exclusive native lock, CPU/sibling reservation, movable-user-thread eviction/restoration, quiet preflight with bounded readiness wait, Docker1CPU quota/4GiB/ no extra swap/networknone/readonly root-source-input-worker/capdropALL/no-new-privileges/64PIDs. Actual resource and CPU/quiet samples are preserved in the raw records. Fixed kernel threads and missing worker context-switch/fault accounting prevent an automatic L2 claim. No builds/tests/heavy work from this task ran during measured arms.

The source, worker and runner hashes are unchanged from the prior completed validation: full serial release library4398passed/118ignored/0failed, exporter19tests, model checker2, native runner14unit+7card tests. These are inherited validation results, not new reruns. Director compiled/validated and assesses the frozen card; mechanical execution captures actual stdout verbatim under noclobber, with write-once output and no computation/retry. Exact dispositions are in the retained assessments.

Only Rust/native tools execute and audit research or derive result values. Python renders already-recorded values and inspects this PDF. SVGs and150dpiPNGs have the same plotting source; benchmark copies are regenerated together. This is a bounded-search continuation, not a measured algorithm change or a completed IC-vs-rho comparison. No new external-tool timing comparison is admitted. Cold leaderboard/scoreboard/rho/ curve-registry claims remain governed by their separate evidence gates; REPORT.md lists unchanged canonical graphs.