Recorded run: pilot-a-c5

Session `ECBS1h471802fb4f6c`; spec `ECS1hb04ad99a0861`. Source commit `45def5ca7a5546113bc2fb47b44c43138323ac1d`. Public synthetic, independent one-target solves.

Requested 48; recorded 48. Statuses: `{'verified': 48}`. Required isolation L0; wall time is descriptive only.

Arm	Attempts	Verified	Charged GAE sum (lower bound)	Peak RSS KiB
bsgs-neg	16	16	890052.0	129064
rho-neg-aa	16	16	831127.0	128040
rho-plain	16	16	1300808.0	127848

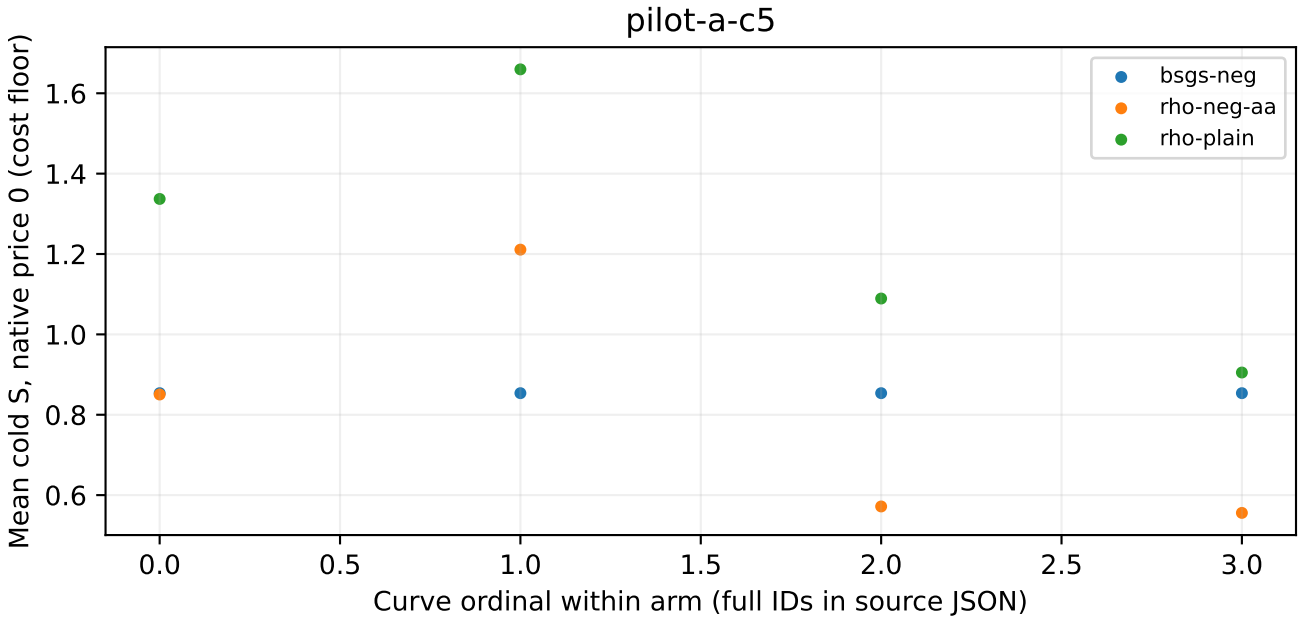


Figure 1: Native recorded means; no timing or speed ranking.

Raw records: `research/conductor_gap_replication_20261025/sessions/pilot-a-c5/records.jsonl`; spec and seeds: that session's `spec.json`. Host: `host.json`; exact replay: `research/conductor_gap_replication_20261025/sessions/pi` All per-curve 0/0.1/1 GAE bands, native counters, resource and failure totals: `analysis/diagnostics-calibration.json`. The plotted means are native ecbench summaries of verified records. Missing prices remain unknown. These observations alone admit no full-cost method ranking. Calibration sessions are excluded from primary inference.