IC validation gate, Tables B and C (2026-10-24, Conductor T-2)

Question. Can the existing rows of leaderboard Tables B and C pass the validation gate (replay certificate, validator report, matched rho reference with the section 5a band)? Decision rule R1 to R4 frozen in PROTOCOL.md before any replay. Nothing here is an improvement; it decides which numbers may be shown.

Result (measured and derived, this study).

- Table B: 13 of 13 rows pass R1 to R4. 1257 counted runs replay identically in a fresh process; 633 archive and 945 replay scalar runs verify as [d]G = Q in an independent verifier (1578 of 1578 negative controls rejected); all 52 headline numbers recompute to 1e-9. IC stays above rho at every weight of the section 5a band. The manifest is staged for docs/ic/runs (outside this task's write scope).
- Table C: 0 of 9 pass. R1 holds (27 of 27 sampled replays identical), R3 holds (36 numbers), R2 cannot be checked (no target points archived) and R4 fails: the reference is a different study's batch rho, not a same-process arm, and no unpriced counts exist for a band.
- Gap to matched rho (distance remaining): Table B 5.47x to 38.21x (4.05x to 54.76x across the band); Table C 3.62x to 14.90x.

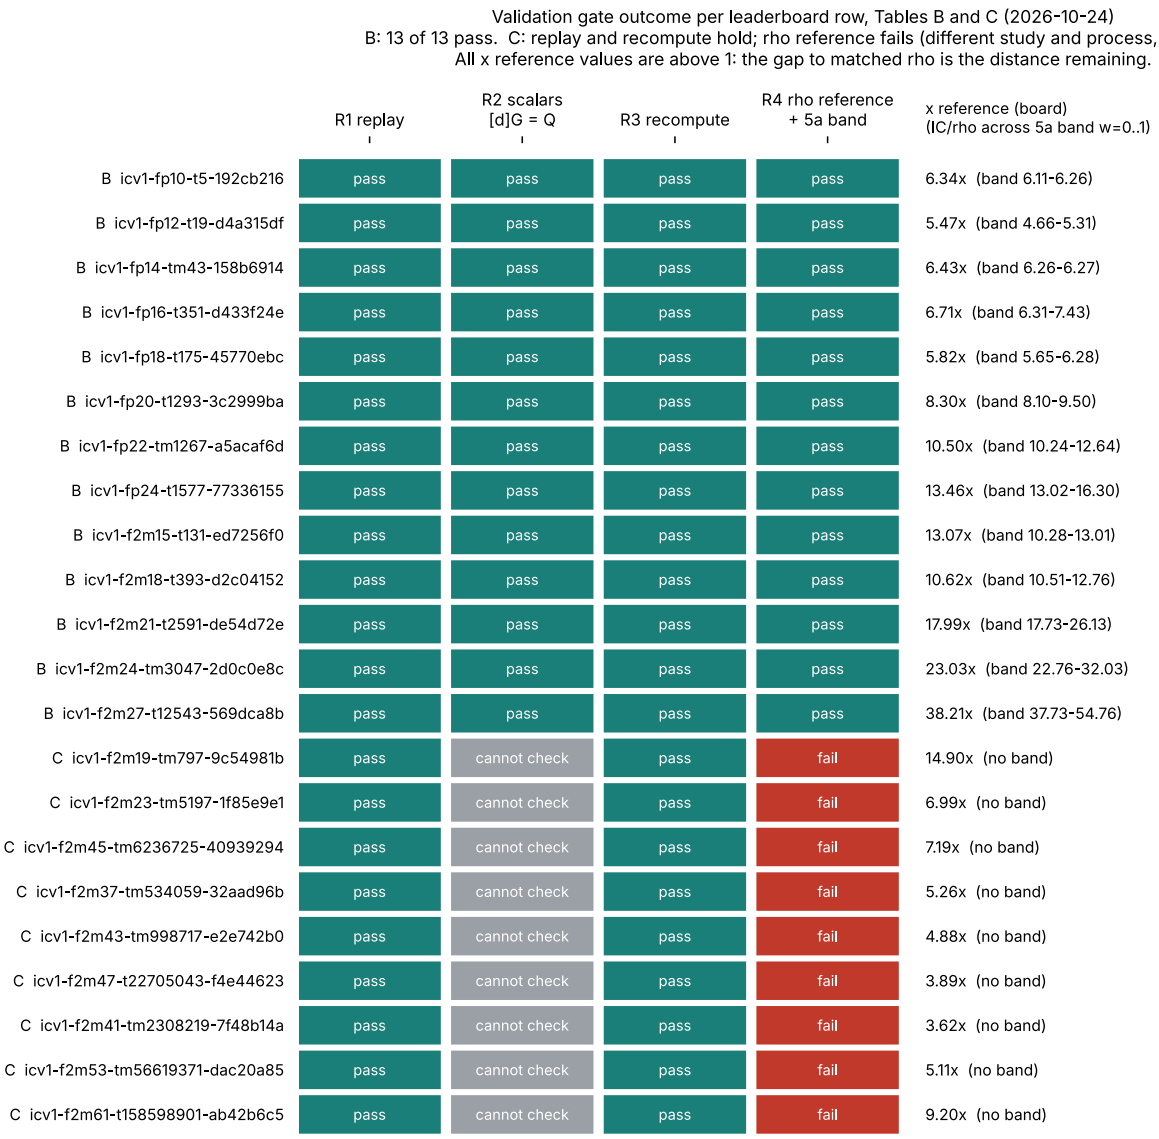


Figure 1: Per-row outcome of R1 to R4 (recorded verdicts; x reference from the board).

Per row (S in GAE per sqrt r for B, units per sqrt r per target for C)

table	row	standing	S_IC	S_ref	x ref	IC/rho over band w = 0, 0.1, 1
B	icv1-fp10-t5-192cb216	pass	22.85	3.605	6.34	6.11 to 6.26
B	icv1-fp12-t19-d4a315df	pass	15.62	2.855	5.47	4.66 to 5.31
B	icv1-fp14-tm43-158b6914	pass	13.07	2.034	6.43	6.26 to 6.27
B	icv1-fp16-t351-d433f24e	pass	11.68	1.74	6.71	6.31 to 7.43
B	icv1-fp18-t175-45770ebc	pass	8.414	1.446	5.82	5.65 to 6.28
B	icv1-fp20-t1293-3c2999ba	pass	10.72	1.292	8.30	8.10 to 9.50
B	icv1-fp22-tm1267-a5acaf6d	pass	12.77	1.216	10.50	10.24 to 12.64
B	icv1-fp24-t1577-77336155	pass	13.97	1.038	13.46	13.02 to 16.30
B	icv1-f2m15-t131-ed7256f0	pass	26.31	2.013	13.07	10.28 to 13.01
B	icv1-f2m18-t393-d2c04152	pass	21.3	2.006	10.62	10.51 to 12.76
B	icv1-f2m21-t2591-de54d72e	pass	24.39	1.356	17.99	17.73 to 26.13
B	icv1-f2m24-tm3047-2d0c0e8c	pass	27.24	1.183	23.03	22.76 to 32.03
B	icv1-f2m27-t12543-569dca8b	pass	36.93	0.9665	38.21	37.73 to 54.76
C	icv1-f2m19-tm797-9c54981b	fail R4	4.873	0.3271	14.90	no band
C	icv1-f2m23-tm5197-1f85e9e1	fail R4	1.432	0.205	6.99	no band
C	icv1-f2m45-tm6236725-40939294	fail R4	0.8563	0.1191	7.19	no band
C	icv1-f2m37-tm534059-32aad96b	fail R4	0.4853	0.09224	5.26	no band
C	icv1-f2m43-tm998717-e2e742b0	fail R4	0.3248	0.06663	4.88	no band
C	icv1-f2m47-t22705043-f4e44623	fail R4	0.2344	0.06022	3.89	no band
C	icv1-f2m41-tm2308219-7f48b14a	fail R4	0.2408	0.0666	3.62	no band
C	icv1-f2m53-tm56619371-dac20a85	fail R4	0.2605	0.05095	5.11	no band
C	icv1-f2m61-t158598901-ab42b6c5	fail R4	0.4885	0.05308	9.20	no band

The 96 root-finder replay mismatches

`ecbench verify --replay-all` on session ECBS1hfd5bf1885227, current binary: 72 of 168 identical, 96 differ, same scalars. By arm: ic-f4-m2 24, ic-f4-m3 24, ic-rootfind-m2 24, ic-rootfind-m3 24 differ; rho-strong, rho-strong-aa, rho-frob 24 of 24 identical each. Field level (each flagged record re-executed and diffed): the 48 F4 rows differ in relations.native.solver_ops (m2 300,531 to 301,961; m3 2,832,171 to 3,732,225) and are repriced (word XORs now charged). The 48 root-finder rows differ only by two new counters in oracle_setup (pair_table_kind 0, pair_table_points 33); every existing counter, every GAE and every scalar is equal. So the statement that the 96 are inherited-F4 rows and not root-finder rows is refuted as stated (half are root-finder rows), while the substantive point stands: no root-finder number changes. Table B and C rows read ic boundary and ic price oracle counts, which R1 re-executes identically; they are not affected.

Limits

Binaries were built from the working tree with other agents' uncommitted edits (koblitz_index_calculus.rs, ic price.rs, workflow.rs); all replays agree with the archive and with sweep A's clean-build count (72 of 168). Table C scalars are not independently checked. Table A and the v4 run are not covered here. L0 shared host; no timing is used for B.