
N83 direct-subgroup x census, dimension 18

Protocol commit: `b28bf2904`. **Native source commit:** `9e483ab2ea4ce4d18b6b4e3bc5070a8db547b8c2`. The public primary curve is `icv1-f2m83-tm6151469093347-debefd74`; source x spans all 262,144 polynomial words with bits 0–17. The exact binary SHA-256 is `571f993f4bddc32e2e189d0778ce5b62f883460dff1dcf65a65788cc4f368bee`. The complete native direct run was 2026-10-19 01:42:39–01:42:58 UTC on shared arm64 macOS. It exited 0. No target entered the census.

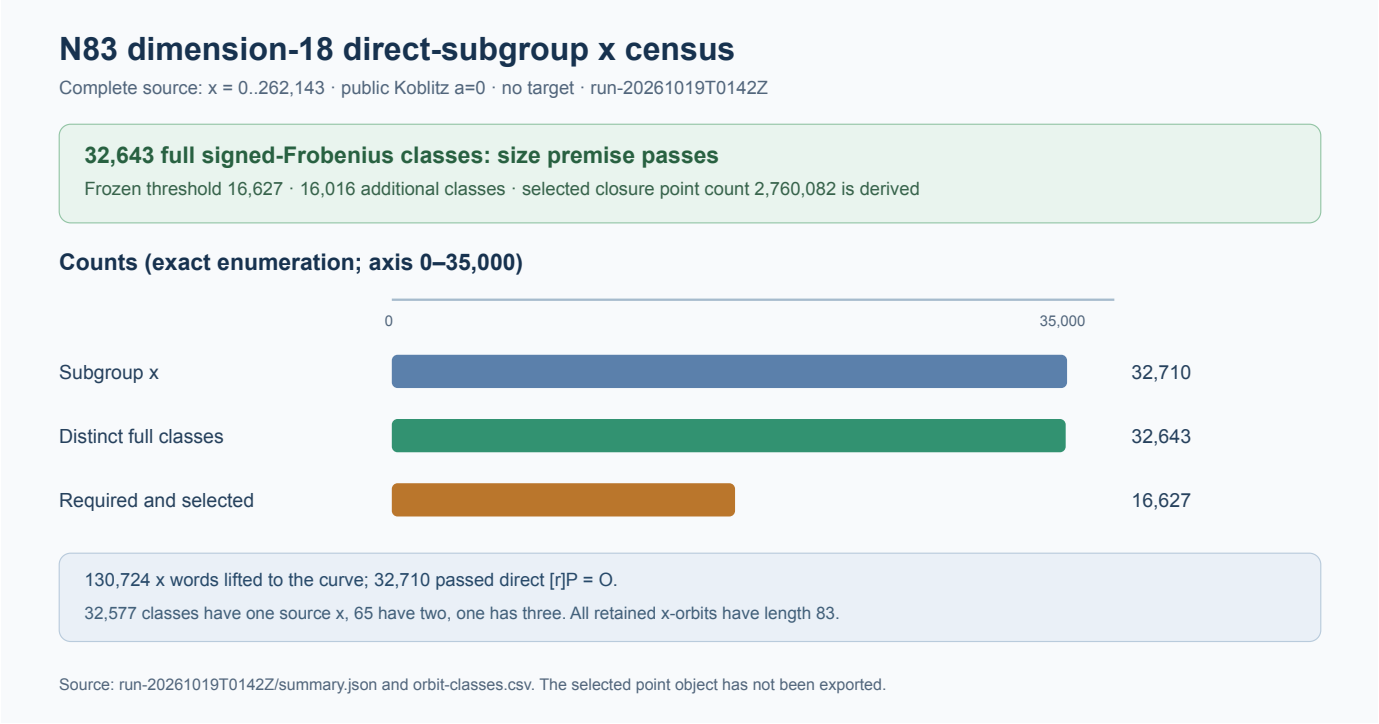

Measured and derived counts

Population or phase	Exact count
Source x words	262,144
Rational x words	130,724
Direct-subgroup x words	32,710
Distinct full signed-Frobenius classes	32,643
Selected columns / frozen threshold	16,627
Derived selected closure points	2,760,082

Every subgroup x had orbit length 83. Class source multiplicities were 32,577 once, 65 twice and one three times. The direct run's internally measured process wall was 18,865.461 ms at L0 while a separate release suite ran. The first attempt wrote byte-identical class and selected CSVs but `/usr/bin/time -l` exited 1 when its post-run macOS `sysctl` was denied; its native internal wall was 24,721.084 ms. Both attempts and the failed wrapper are preserved in `raw-files.sha256`. Seventeen selected points were rechecked through the general curve, subgroup and Frobenius APIs. A fully independent implementation has not replayed all 262,144 inputs.

The selected closure's point count is a consequence of 16,627 disjoint 83-phase, two-sign classes. The point archive and index have not been built; natural relation yield, useful rank and complete cost are open. `RUN_REPORT.md` and `RESULT.md` link the raw CSVs, audit and next export obligation.