Run report: ecbench session `ECBS1h7297c431c21a` (e-m17-ic.attempt1-killed), 2026-10-15T17:44Z

Part E, `m = 17`, the IC half (killed after 1 of 2 runs; superseded). Spec `specs/SPEC-E-m17-ic.json`. Binary sha256 `c143cf62…`, commit `e403626cb` (clean). Host: Xeon @ 2.10 GHz, 4 vCPU, one core per session (isolation level L1 or L0, recorded per run: wall time is descriptive only). The session was killed by a container restart: 1 of 2 planned runs were recorded and the rest are missing. Its status is `running`, `ecbench verify` fails exactly its `session\_complete` and `record\_count` checks, and its records were not replayed.

arm	workload	m	status	S	GAE	trials	relations	wall (h)
ic-wied	`Wd5f7dba84d0e`	17	verified	0.8493	1.032e+10	6173936	32252	7.518

All values are recorded fields (`S` = `cost.s`, GAE = `cost.total_gae`, trials and relations from `counters`, wall = `time.solve_wall_ns` ÷ $3.6{\cdot}10^{12}$); no run here is a replay. Records: `sessions/e-m17-ic.attempt1-killed/records.jsonl`. Audit receipts: `audits/`.

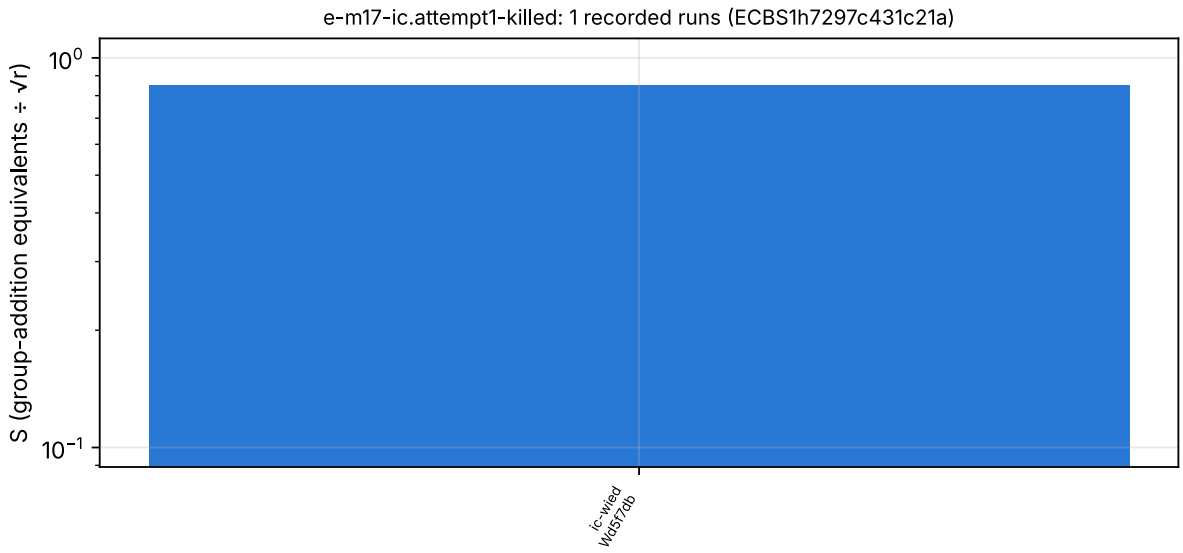

Figure 1: Recorded `S` per run, session `ECBS1h7297c431c21a`.