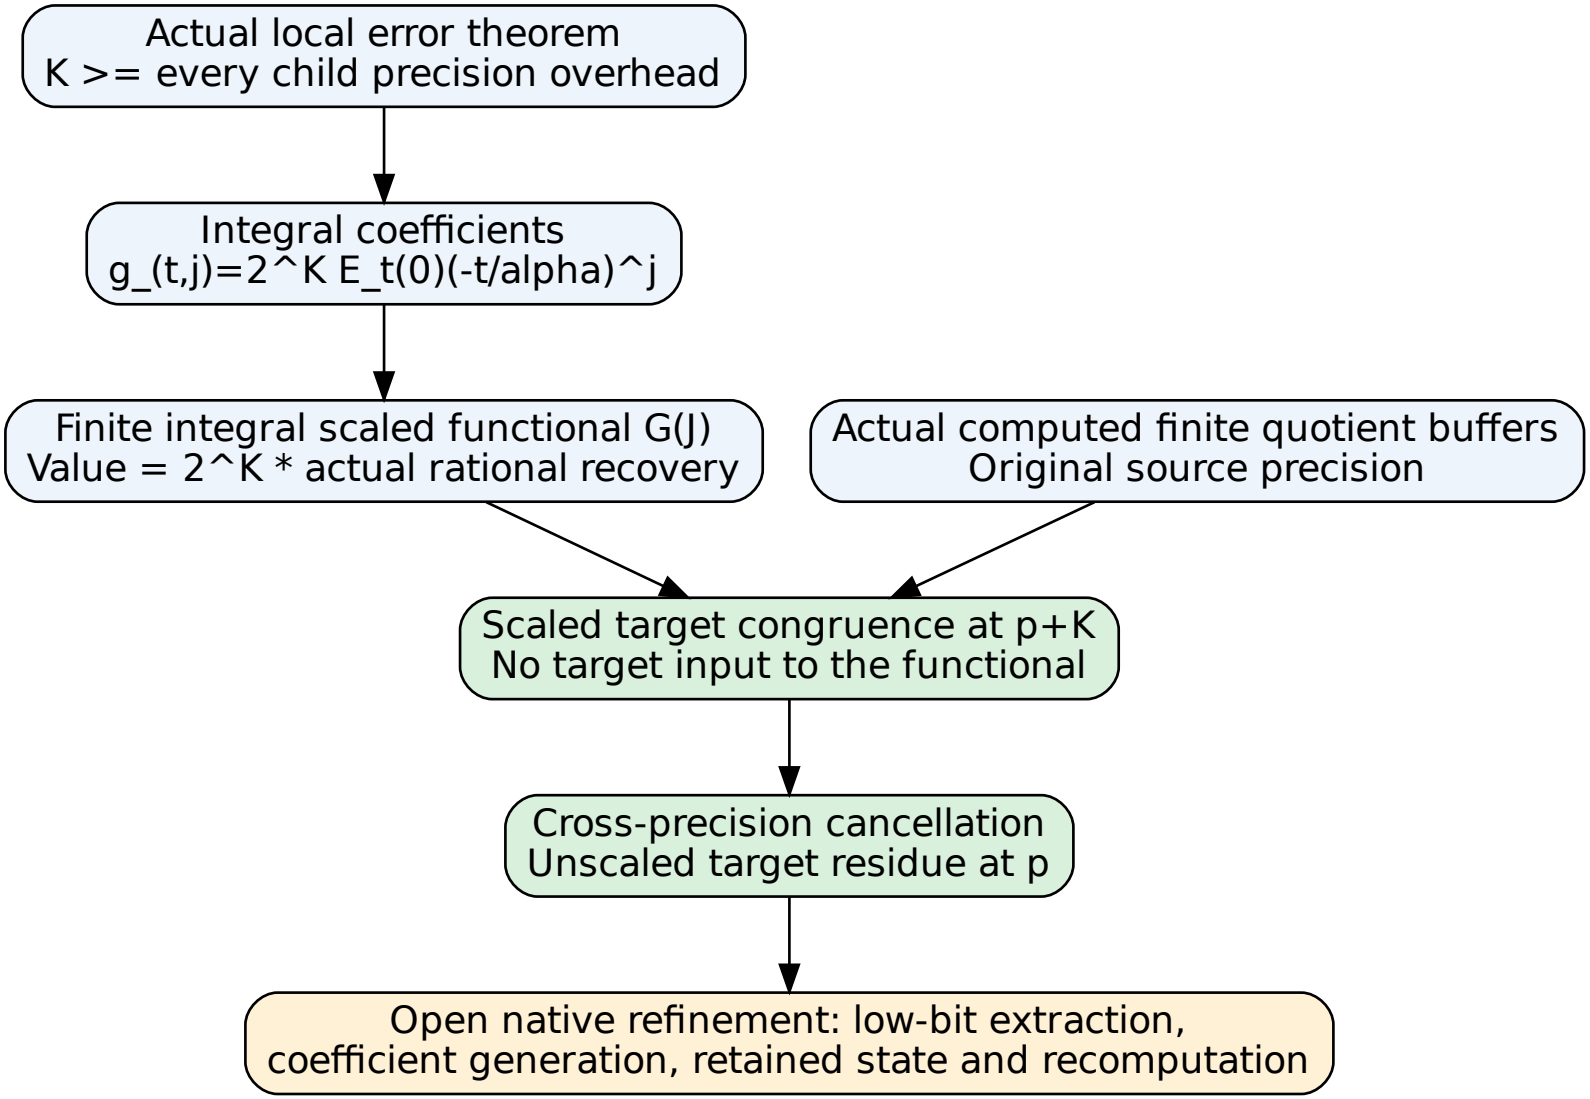
Actual local error theorem
K >= every child precision overhead
Integral coefficients
g_(t,j)=2^K E_t(0)(-t/alpha)^j
Finite integral scaled functional G(J)
Value = 2^K * actual rational recovery
Actual computed finite quotient buffers
Original source precision
Scaled target congruence at p+K
No target input to the functional
Cross-precision cancellation
Unscaled target residue at p
Open native refinement: low-bit extraction,
coefficient generation, retained state and recomputation