Run report: ecbench session `ECBS1h6e149c0f160b` (d-m14.attempt3-killed), 2026-10-19T20:31Z

Part D, `m = 14` (killed after 2 of 3 runs; superseded by `d-m14`). Spec `specs/SPEC-D-m14.json`. Binary sha256 `c143cf62…`, commit `e403626cb` (clean). Host: Xeon @ 2.10 GHz, 4 vCPU, one core per session (isolation level L1 or L0, recorded per run: wall time is descriptive only). The session was killed by a container restart: 2 of 3 planned runs were recorded and the rest are missing. Its status is `running`, `ecbench verify` fails exactly its `session\_complete` and `record\_count` checks, and its records were not replayed.

arm	workload	m	status	S	GAE	trials	relations	wall (h)
rho-neg	`Wc066172da07a`	14	verified	0.6251	1.186e+08	–	–	0.020
ic-dense	`Wc066172da07a`	14	verified	5.331	1.012e+09	743965	4036	0.641

All values are recorded fields (`S` = `cost.s`, GAE = `cost.total_gae`, trials and relations from `counters`, wall = `time.solve_wall_ns` ÷ $3.6{\cdot}10^{12}$); no run here is a replay. Records: `sessions/d-m14.attempt3-killed/records.jsonl`. Audit receipts: `audits/`.

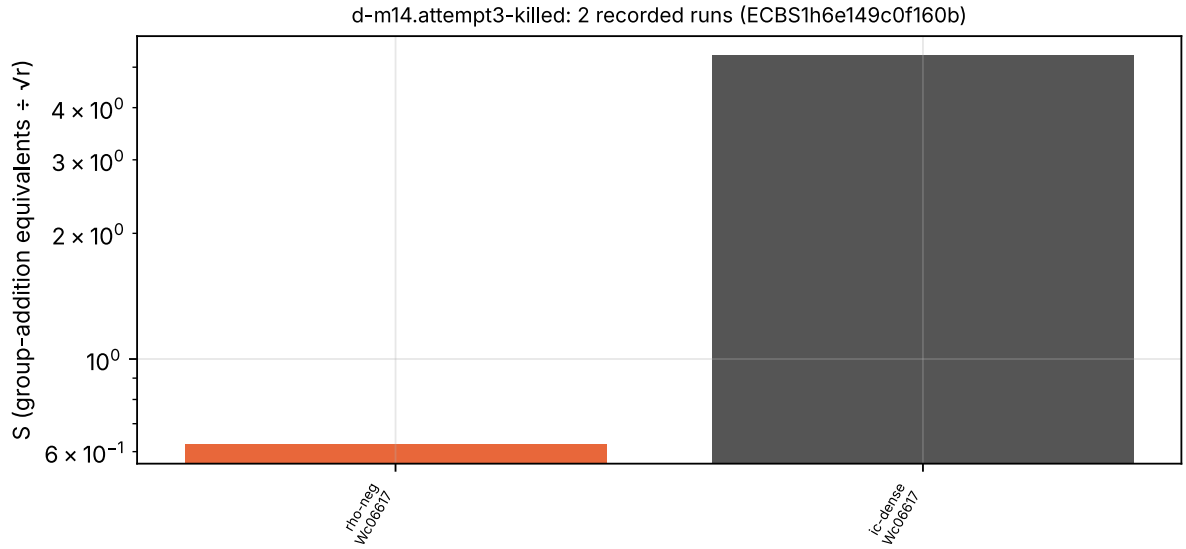

Figure 1: Recorded `S` per run, session `ECBS1h6e149c0f160b`.