Run report: tian-q7-run-20261024T2239Z

Descriptive record of one recorded run of examples/genus4_n4_census.rs, part TIAN under `research/genus4_n4_census_20261024/PROTOCOL.md` (with its dated amendments). It lists what ran, on what host, and what the tool recorded, file by file. Interpretation is in the study's `REPORT.md`. Costs are counted operations (F_p multiplications and inversions, group operations, native operations), never wall-clock; the only times are the tool's own seconds. Isolation: none earned (a shared cloud container, or a RunPod CPU pod whose lscpu is in host.txt); this affects only the seconds, since every recorded value is an exact count or a counted operation total.

env.txt

```
run: tian-q7 20261024T2239Z
git HEAD: 7a579ce24983ef78f6af4ecf3dc9a8c6f10e8a91
tool: examples/genus4_n4_census.rs sha256 efce43f3fdaa848389a03f3d778a9b9604fe23d1d6e5e1bd75e777a49fb6cf01
protocol: research/genus4_n4_census_20261024/PROTOCOL.md sha256 65702f045ec07ff04edc651d7add4725ceecc7cf1bdc79b495a712a8cb942a44
command: /tmp/claude-0/g4/g4 research/genus4_n4_census_20261024/results/tian-q7-run-20261024T2239Z TIAN 7 /tmp/claude-0/g4/empty_hits.csv
rustc: rustc 1.97.0 (2d8144b78 2026-07-07)
host: Linux 6.18.44-fc-v153 x86_64, 4 cores, Intel(R) Xeon(R) Processor @ 2.10GHz
threads: 1
wall seconds: 1
```

tool_log.txt

```
t=-75 done (0s)
t=-71 done (0s)
t=-65 done (0s)
t=-57 done (0s)
t=-45 done (0s)
t=-39 done (1s)
t=-15 done (1s)
t=-9 done (1s)
t=3 done (1s)
t=9 done (1s)
t=13 done (1s)
t=19 done (1s)
t=25 done (1s)
t=31 done (1s)
t=45 done (1s)
t=51 done (1s)
t=55 done (1s)
t=61 done (1s)
t=69 done (1s)
t=93 done (1s)
```

tian_by_t.csv (first 12 of 60 rows)

q	t	nE	hits_forms	ordinary	disc	ell	qbar	tr	det	types	n_ker_by_type	n_tian_by_type	tian_exists
7	−75	2477	0	true	−3979	2	1	1	1	nonsplit	1	1	yes
7	−75	2477	0	true	−3979	3	1	0	1	nonsplit	2	2	yes
7	−75	2477	0	true	−3979	5	2	0	1	split	2	0	no
7	−71	2473	0	true	−4563	2	1	1	1	nonsplit	1	1	yes
7	−71	2473	0	true	−4563	3	1	1	1	scalar|jordan	12|3	8|2	yes
7	−71	2473	0	true	−4563	5	2	4	1	nonsplit	4	4	yes
7	−65	2467	0	true	−5379	2	1	1	1	nonsplit	1	1	yes
7	−65	2467	0	true	−5379	3	1	1	1	jordan	3	2	yes
7	−65	2467	0	true	−5379	5	2	0	1	split	2	0	no
7	−57	2459	0	true	−6355	2	1	1	1	nonsplit	1	1	yes
7	−57	2459	0	true	−6355	3	1	0	1	nonsplit	2	2	yes
7	−57	2459	0	true	−6355	5	2	3	1	jordan	1	0	no

Graph

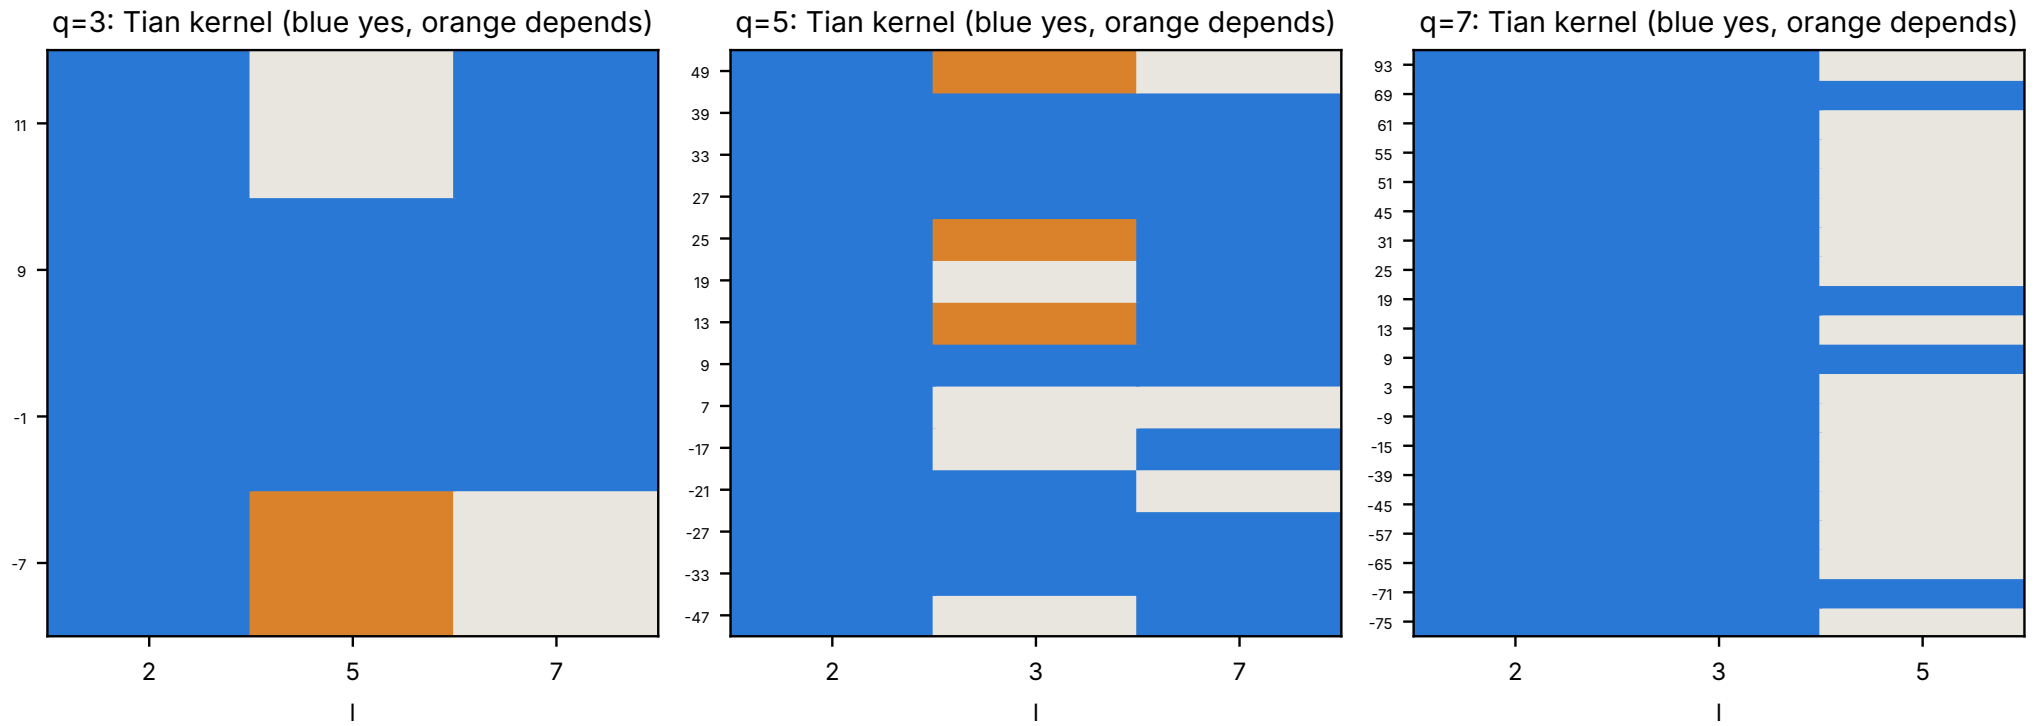


Figure 1: Tian kernel existence per prime-order trace and l (n = 4).