Separate-engine replay of every fixed whole map

2026-11-12 · fixed F101 chain · scientific standing unsigned

PCC5cf8f9 accepts the changed complete standalone suite:29 tests pass, with no failures,ignores or filters. Strict Clippy,formatting and the old reference/legacy digests pass. All three source and nine fixture hashes stay unchanged. The full19,664-byte raw log is preserved as standard XZ4,624 bytes, with raw/archive digests and exact roundtrip. These are correctness checks; no performance comparison is made. [pcc:unverified]



Every direction and every rational output

The checker matches all12,317 old outputs for each first,second and compressed forward/adjoint direction. It checks every target representative valid and distinct. Wrong-quarter omission differs on all12,316 nonidentity inputs and equals exactly four times the correct output. Schema,model and index mutations reject. All original21 standalone tests remain. [pcc:unverified]

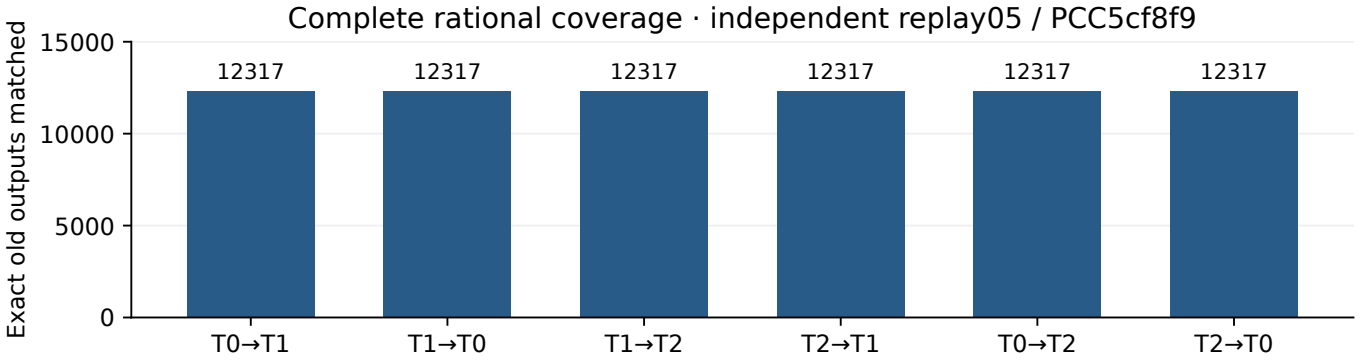

A different evaluation route

Finite support points split over a different quadratic field basis z^2-3. The checker verifies every linear factor with multiplicity,evaluates the curve cover on each support point,adds elliptic images and includes the signed infinity correction. It does not call the producer matrix trace. Origin and finite poles are retained. [pcc:unverified]

For pullback,it constructs $U=N-XQ^2$ and $V=YQ^3/M$ moduloU using the existing Euclid inverse. Unit and curve identities include repeated fibres and jets. It converts the complete raw degree≤ 4 pair and infinity term to a monic quintic chart,then reduces and adds with the separate legacy Cantor engine. No producer Balanced,Richelot or pipeline code is imported. The existing field,polynomial,elliptic and Kohel engines are shared explicitly. [pcc:unverified]

The frozen INDEPENDENT_MAP_PROOF.md/ab8c53 explains these identities and the old global Picard dependencies. INDEPENDENT_MAP_COMPLETE.md records the now-complete runtime scope;the earlier proof’s pending runtime paragraph is historical. Scalar/public-map agreement supplies no solver advantage. [pcc:unverified]

Actual geometric kernels and negative controls

Both exported49-class kernels are independently valid,distinct and killed by7 in Cantor after an explicit $F101^{6}$-to-$F101^{12}$ embedding. Pointwise cover norms,elliptic7 maps and raw-fibre pullbacks kill all49 classes for each actual Psi. Omitting the7map with source norms/pulls and inverse4=2 returns each input and leaves all48 nonidentity classes nonzero. This tests actual software membership beyond the old validity/ Frobenius/group replay. [pcc:unverified]

Fixed geometric control	Psi1 kernel	Psi2 kernel
Valid/distinct/7-annihilated	49 of49	49 of49
Mapped to zero by the separate evaluator	49 of49	49 of49
Nonzero when the elliptic7 map is omitted	48 of48 nonidentity	48 of48 nonidentity

Global completeness still uses the admitted separable degree49 theorem: 49 distinct kernel points exhaust a degree49 isogeny kernel. The finite replay itself does not establish degree,regularity or Picard realization. It enumerates the two selected49-class kernels,not all2,401 geometric 7-torsion points. CT38′s general rational/tangent shadow remains a reason to retain independent degree arguments. [pcc:unverified]

Three faithful formal consequences

IndependentMapChart.support_chart_homogenization/175646 proves the cleared support substitution through degree4. ordinate_chart_homogenization/fe086f proves the matching cubic ordinate substitution. The conditional seven_torsion_omitted_map_control/73e237 proves K[2]H=[8]=[1] on 7-annihilated points from explicit norm4 and linearity hypotheses. All three are individually bound,locally kernel checked and audited with zero trusted native proofs. The written census is147 declarations across29 modules; actual fields,varieties,Picard maps,Cantor correctness and geometry remain partial or written dependencies. Scientific signing remains separate. [pcc:unverified]

Preserve the bounded failure and the complete obligations

Collective old-reference fixture export01/b6bc9e reached its15-minute resource bound with exit124 after emitting all three corpora and the complete first-forward array. It was never accepted as a complete six-map run. Version2/fd19e7 allocates each missing base direction separately,then composes the same frozen old index arrays in Rust for the two compressed directions. Every remaining attempt selects exactly one passing unit. All corpora stay byte-identical and all final six maps are now independently replayed. Full source,raw outputs,partial data,digests and statuses are retained. [pcc:unverified]

First compile failureec97e5 and fixed-chunk Clippy failuref0b40f remain with native marked not run. The accepted evaluator snapshots and all prior proofs,reports and negative controls remain immutable. The old forward, geometry and reverse figures retain their stated scopes;this new method diagram and coverage chart describe the added independent route. [pcc:unverified]

Cross-repository checkpoint and next discriminator

Ready consumer1508 atc7128485f/tree083952bd targets immediate1507/935. Its complete actual check is25native/98reference plus five integrations, one historical ignored3be24d,source d0ad0a,written96a2d2/ reportecddc4/ pack9e858b. Own focusedCI was dispatched10:40;parent1507 exact43191178913 succeeds92reference/fullf72285. This is separate from the standalone29suite. Prior rootb351 CI43196578049 scope21/144/28 is due10:52;the new29/147/29 scope needs its own exact-headCI. [pcc:unverified]

Next:enumerate the full geometric7-torsion action to test behaviour beyond the selected kernels,including shadow-map negative controls. Global degree remains a separate obligation even then. Live-budget/S3 admission9e1812 is unknown,atlas vault locked and KB/ecdb unavailable;no paid run,solver, novelty or measured computational advantage is claimed. [pcc:unverified]