run-20261022T0853Z-quartic_twist_tagged_s5_k3_p37_v1

Raw: quartic_twist_tagged_s5_k3_p37_v1.json | SHA-256: d465f67a28186f8d47b28a0ec8284ec5a0520ab309c7db929dc5f9e1f3d1f261 Current source SHA-256: 45251363eab451979d5eaf18246e63546c3ac5fc74455addb528e91e8c1e9ed0 Measurement source: frozen source commit 98fb8e09f; current source SHA below is a rendering-time snapshot. Intel Xeon Platinum 6975P-C; shared host; L0 exploratory run. Public target [271]G; p=37, b0=2, r=1873633, seed=0.

Execution

`target/release/examples/quartic_twist_tagged_s5 --k 3 research/twist_index_calculus_20261020/quartic_twist_mixed_v1.ndjson` Cap: 8 GiB address space, 1200 s watchdog.

Recorded observations

- Producer status: pass; exact signed-set agreements 4/4; system failures 0.
- Signed polynomial relations 0; field solutions 0; systems attempted 288.
- An agreement on an empty set does not make a failed system complete. The independent scalar-keyed pilot audit classifies each arm.

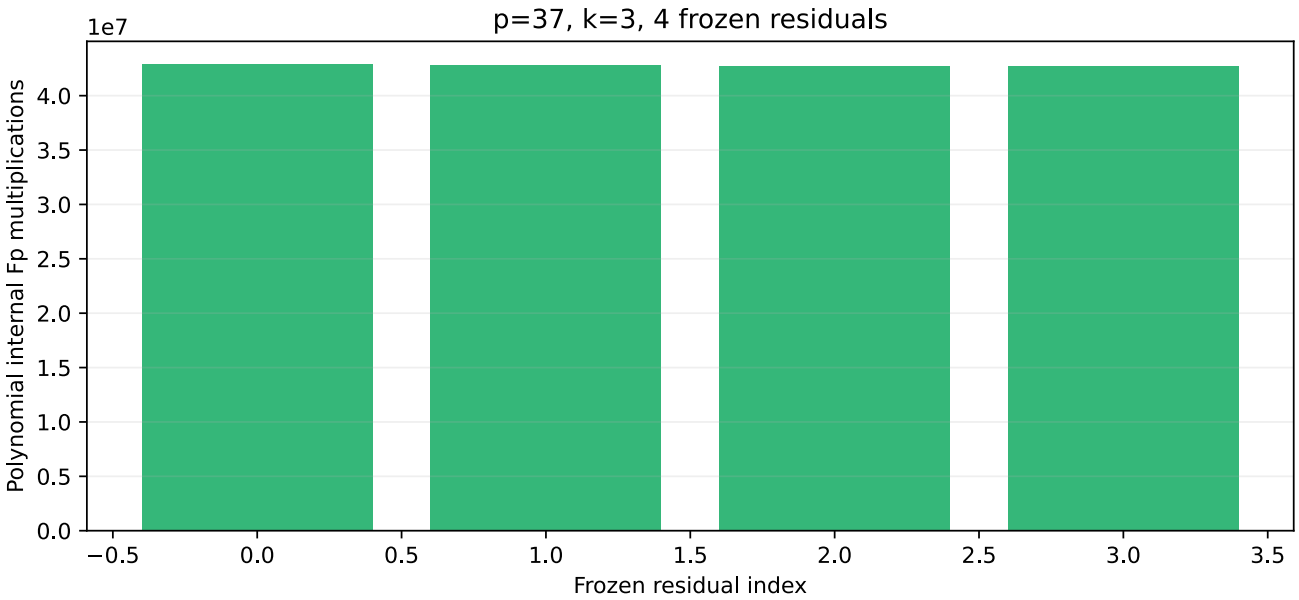

Counted native field work only. L0 wall time is not isolated; native hash, allocator and partition CPU are missing. No priced IC/rho speed claim.