R86: affine lambda on the diamond overlap

The frozen source-coordinate check identifies `b` and `c` on the inverse quadratic chart. The diamond parameter `k=b+(1+c)c` satisfies `z k=(1+z)c²` modulo the source equation. The resulting update is

`lambda1 = [lambda+(1+z)²g]/(z²g)`, with `g=1+z+z²+V`.

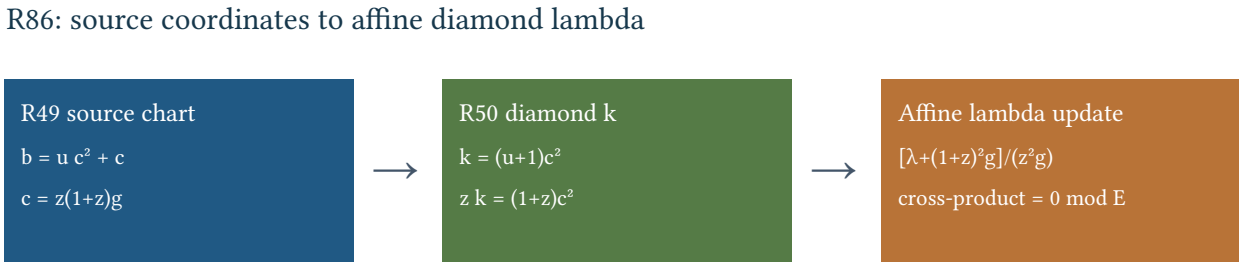

Native: 4 zero remainders, 2 rejected corruptions. Lean: 2 algebraic lemmas. Next: degree-16 equation and 32 RR lifts.

Singular checked two original-coordinate identities, the `k` reduction, and the complete lambda cross-product modulo the quadratic equation. Both deliberately corrupted controls produced nonzero remainders. The accepted run used the committed R86 source, one thread, and its four hash-pinned donor files. Lean separately proves the characteristic-two `k` simplification and its cleared lambda cross-product.

The next calculation substitutes the update into the degree-16 relative equation, then transports all 32 R50 RR basis generators with pole bounds and full module lifts in both directions.