Normalized-square kernel: exact panel

Frozen input panel: L=4,8,16,32; all active levels; zeta=-1,1,3; q=8,12,16,24.
Input cells: 1344; method rows per invocation: 2688.
Two local invocations completed; replay is byte-identical.
Independent tuple recomputations: 5376.

newton: fewer=1200, equal=0, more=144.
smith: fewer=1104, equal=0, more=240.

Witness: L=32, t=-31, zeta=-1, q=16, Smith: original16, candidate33.
The candidate raises entry valuations but introduces more surviving modes.

Scope: finite component tuple counts, with no timing or speedup claim.
Candidate degree4L-2 versus original2L-1 still needs recovery-cost accounting.

Protocol record issue: version1 misdescribes controls/instance granularity.
A retrospective export-layout draft is preserved. The maintained checker
refuses freezing this post-data amendment; no gate was weakened.
Raw computation/replay checks pass; full protocol-export validation does not.

Producer evidence only; independent signed verification is pending.
Details: RESULTS_local_20261107.md and reports/local-20261107/.

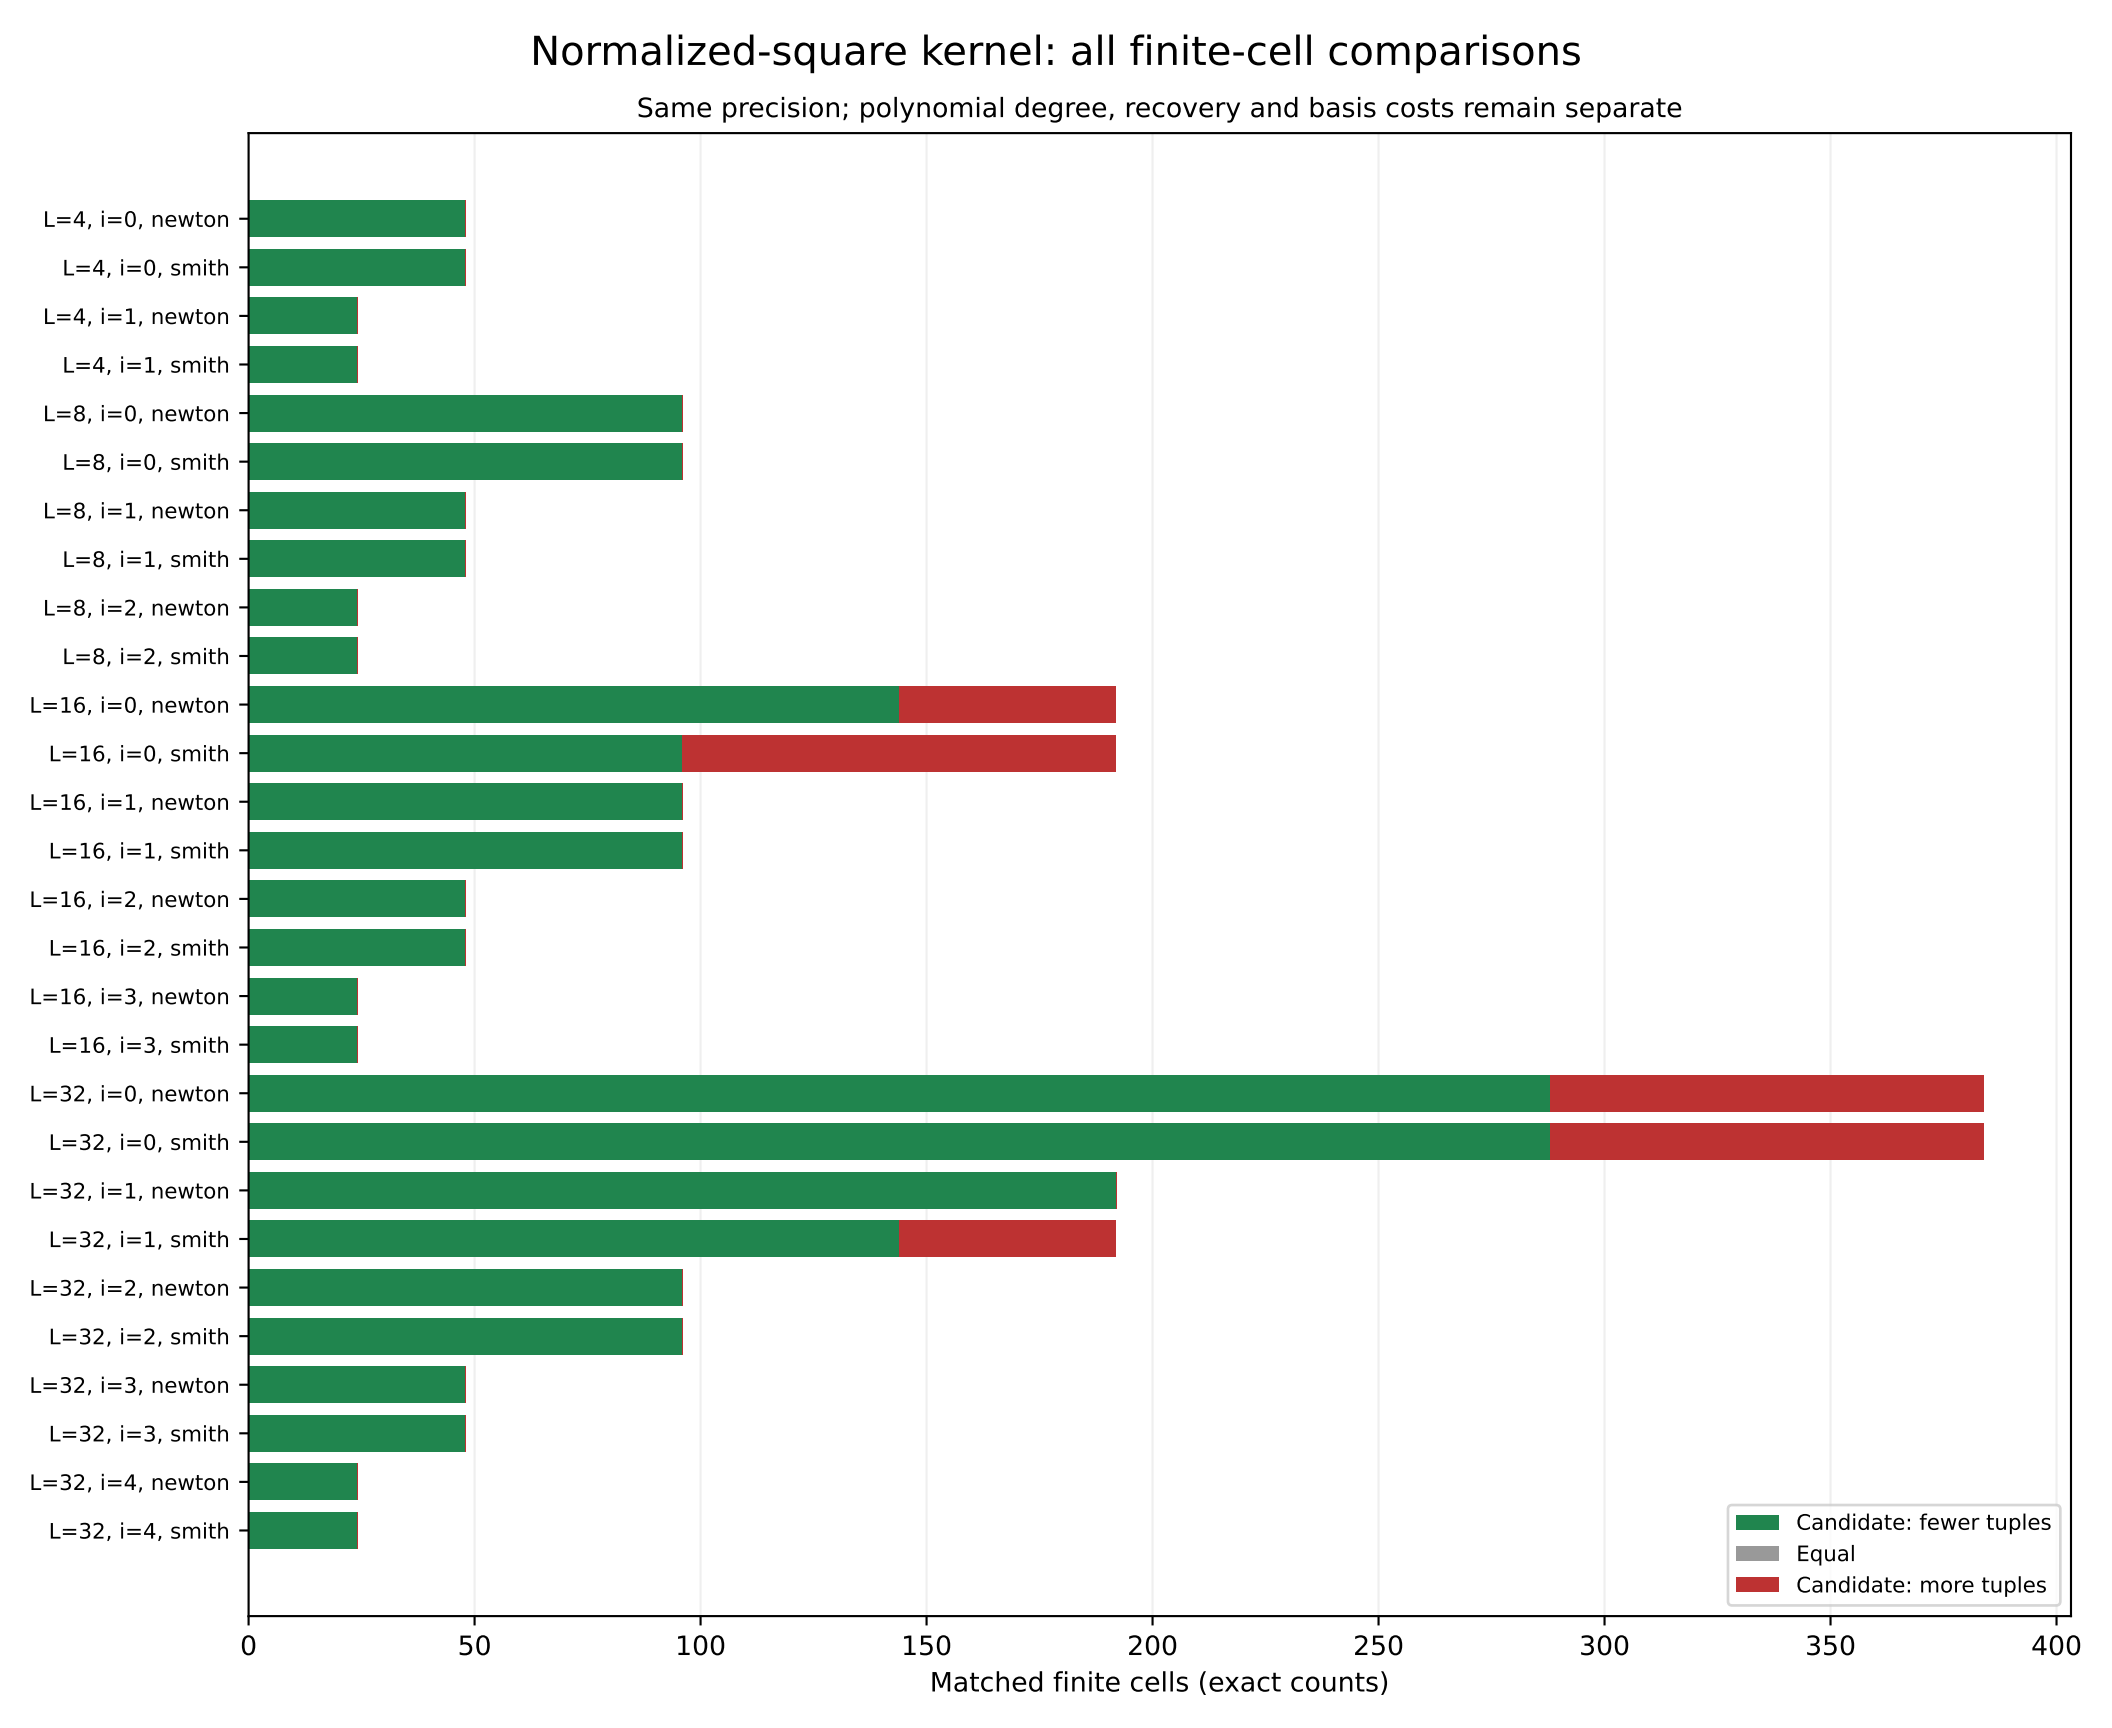
Normalized-square kernel: all finite-cell comparisons
Same precision; polynomial degree, recovery and basis costs remain separate
L=4, i=0, newton
L=4, i=0, smith
L=4, i=1, newton
L=4, i=1, smith
L=8, i=0, newton
L=8, i=0, smith
L=8, i=1, newton
L=8, i=1, smith
L=8, i=2, newton
L=8, i=2, smith
L=16, i=0, newton
L=16, i=0, smith
L=16, i=1, newton
L=16, i=1, smith
L=16, i=2, newton
L=16, i=2, smith
L=16, i=3, newton
L=16, i=3, smith
L=32, i=0, newton
L=32, i=0, smith
L=32, i=1, newton
L=32, i=1, smith
L=32, i=2, newton
L=32, i=2, smith
L=32, i=3, newton
L=32, i=3, smith
L=32, i=4, newton
L=32, i=4, smith
Candidate: fewer tuples
Equal
Candidate: more tuples
0
50
100
150
200
250
300
350
400
Matched finite cells (exact counts)