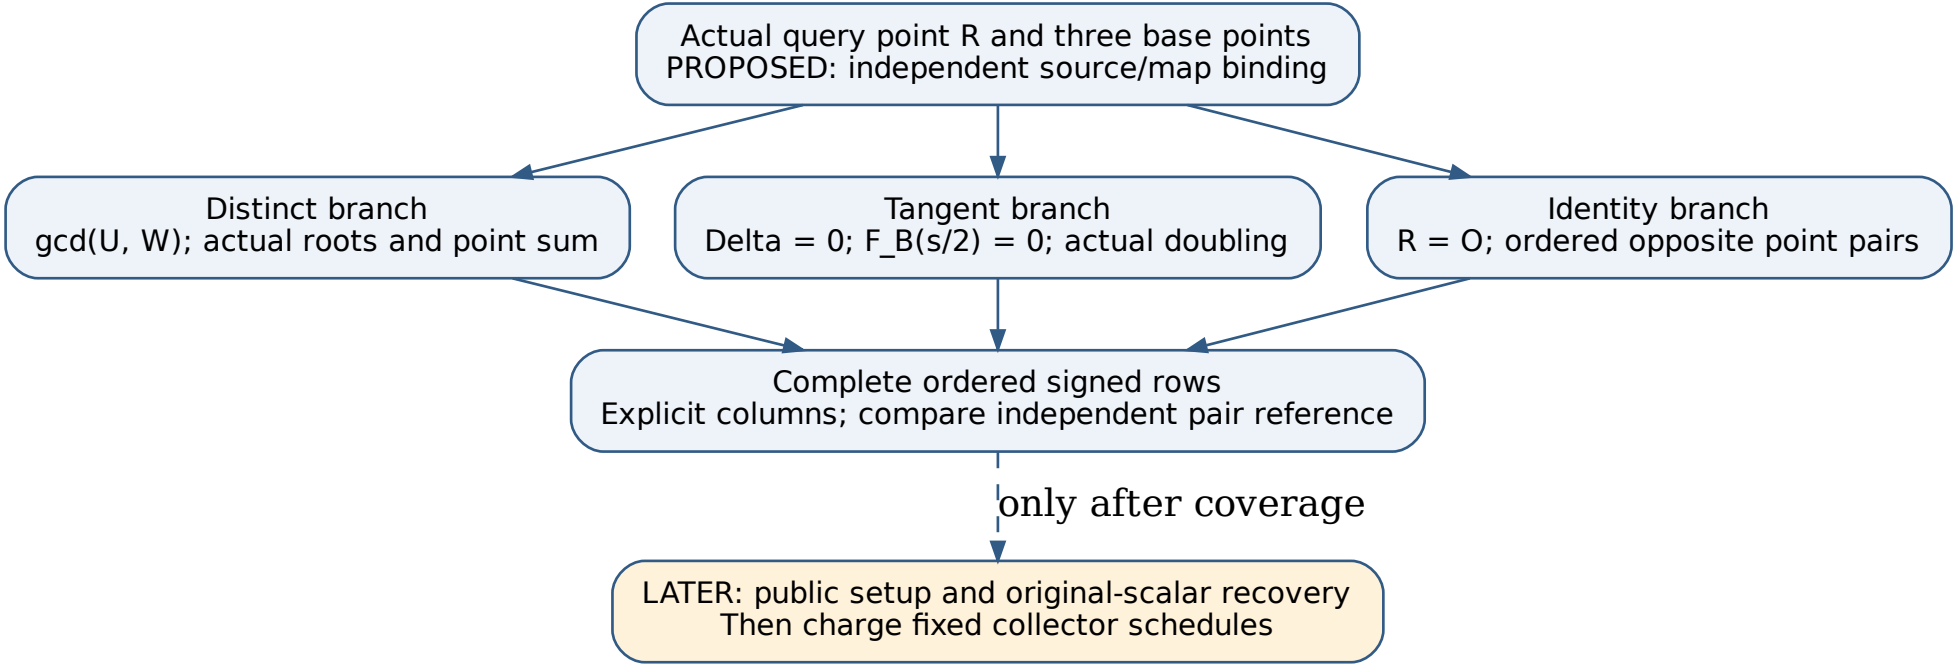
Actual query point R and three base points
PROPOSED: independent source/map binding
Distinct branch
gcd(U, W); actual roots and point sum
Tangent branch
Delta = 0; F_B(s/2) = 0; actual doubling
Identity branch
R = O; ordered opposite point pairs
Complete ordered signed rows
Explicit columns; compare independent pair reference
only after coverage
LATER: public setup and original-scalar recovery
Then charge fixed collector schedules