
# Quartic twist24 full-cost v2 run

UTC start `2026-10-22 05:42:50.656`; source commit `4d6cb3168e`; host Intel Xeon 6975P-C, 32 logical CPUs; 16 Rayon threads; L0 shared host. Frozen protocol: `QUARTIC_TWIST_LINE_PROTOCOL.md`.

Seven curves, three one-target seeds each: 21/21 records, 63/63 IC solves, 1,008/1,008 matched rho solves. All scalars recovered 271. Independent native replay checked 1,821 selected relations, orbit coefficients, matrix rows, rank spans and all answers. Zero failures or timeouts. Raw file: `quartic_twist24_full_v2.ndjson`, SHA-256 `2c050172a0136bf38185ca54ec1a558346548b10bb9b8463a8b77497c0e6aa34`.

The combined fold uses one fourth as many log columns as cubic-only on the same physical base. Median cubic/combined collection-query ratios run from 2.57 to 3.81 and row-operation ratios from 10.78 to 14.79. The recorded $F_p$-multiplication ratio ranges from 0.998 to 3.80. The full24 rho count remains below the twist IC count on every curve.

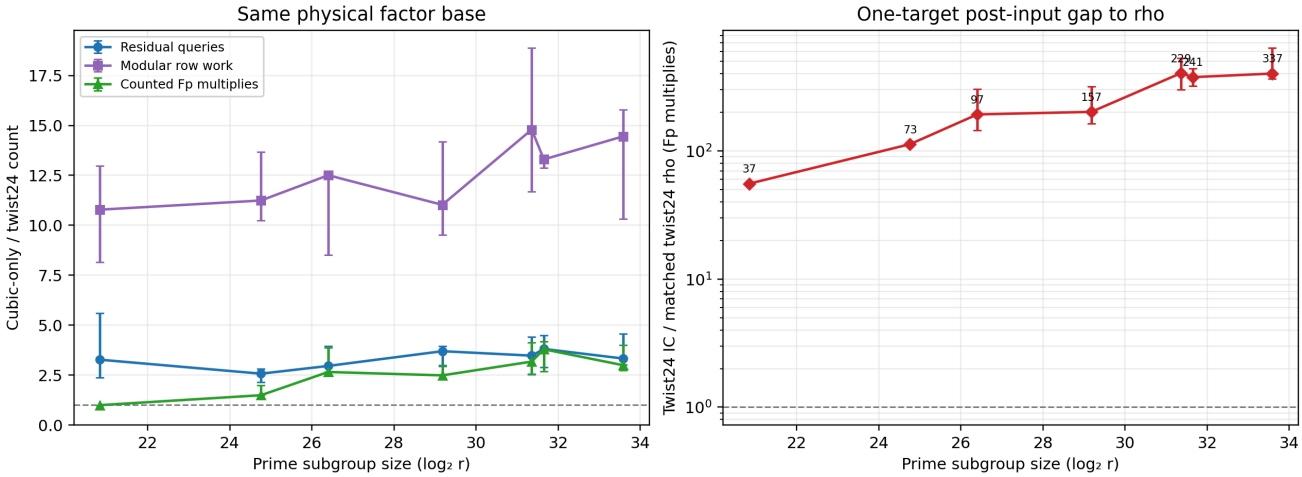


The plot is reconstructed from the raw 21 rows, with three-seed min/max bars. Field multiplications and modular row operations are separate units. Missing IC-stream group additions, hash/table work and calibrated GAE prevent a complete cost ranking. Wall milliseconds are L0 diagnostics only. Exact command, source hashes, raw links and limits are in `README.md`; the full research report is `QUARTIC_TWIST24_REPORT.md` in the study directory.