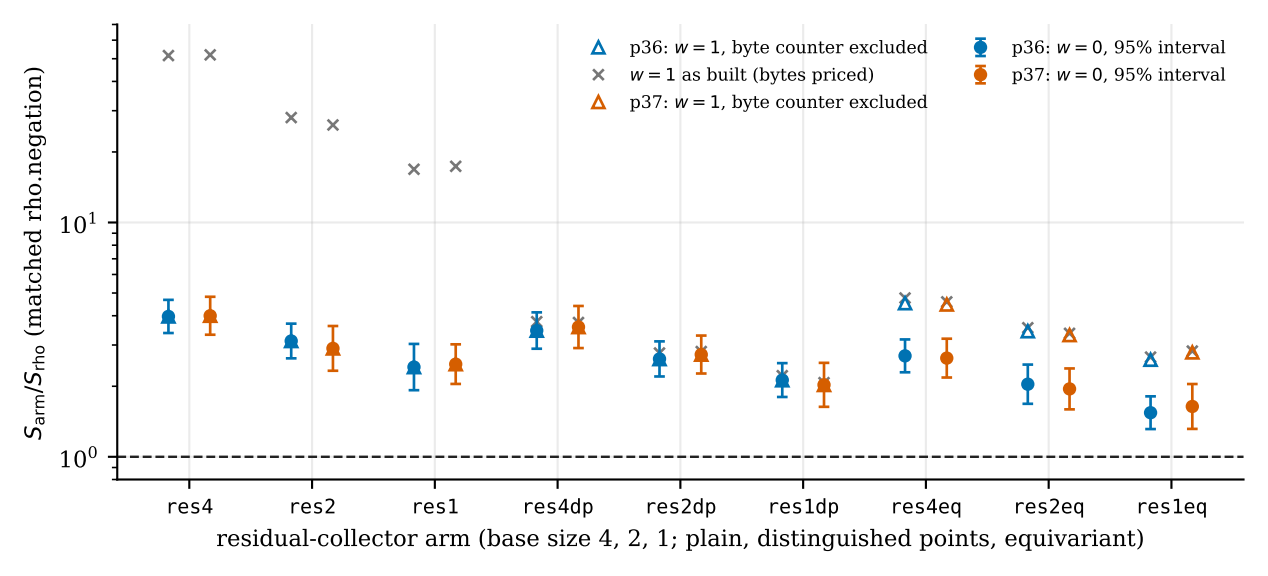
p36: $w = 1$, byte counter excluded
$w = 1$ as built (bytes priced)
p37: $w = 1$, byte counter excluded
p36: $w = 0$, 95% interval
p37: $w = 0$, 95% interval
S_{arm}/S_{rho} (matched rho.negation)
10^1
10^0
res4
res2
res1
res4dp
res2dp
res1dp
res4eq
res2eq
res1eq
residual-collector arm (base size 4, 2, 1; plain, distinguished points, equivariant)