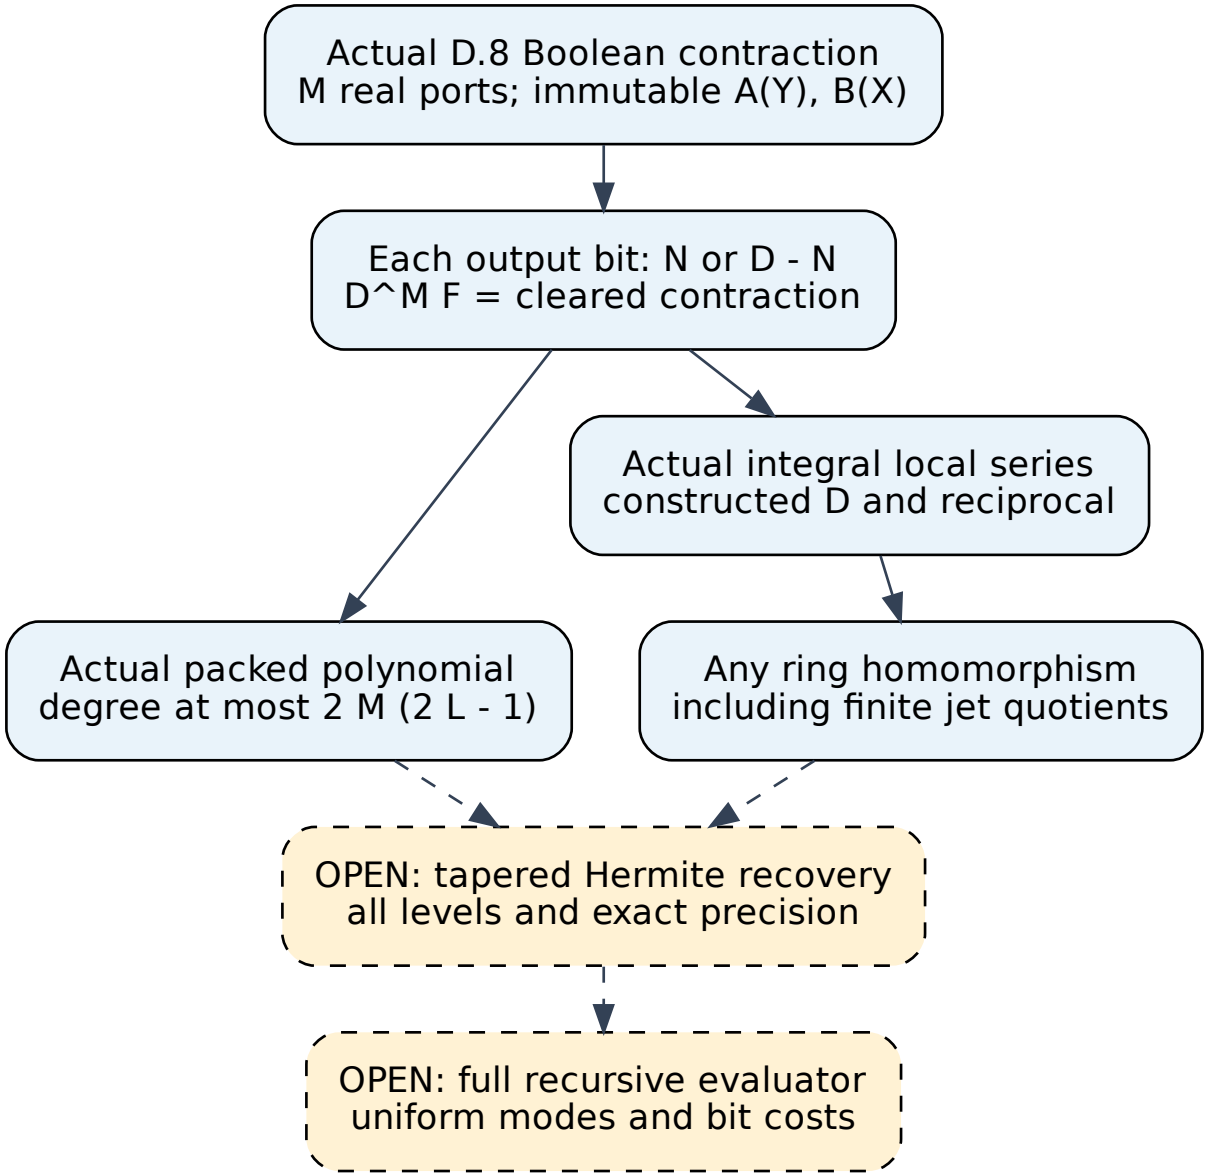
Actual D.8 Boolean contraction
M real ports; immutable A(Y), B(X)
Each output bit: N or D - N
D^M F = cleared contraction
Actual integral local series
constructed D and reciprocal
Actual packed polynomial
degree at most 2 M (2 L - 1)
Any ring homomorphism
including finite jet quotients
OPEN: tapered Hermite recovery
all levels and exact precision
OPEN: full recursive evaluator
uniform modes and bit costs