
Ordinary-binary n23, m=3–15: natural enumeration wave

All 26 frozen native cells have terminal restricted S3 custody and individual Git checkpoints. The same public input was used at every arity within a twist. Both twists at m3–5 completed exhaustive fixed-factor-base searches on four retained points. Both twists at m6–15 reached the 4,096-transition budget, retaining verified censored prefixes. No PDP witness or independently recovered ECDLP scalar was promoted.

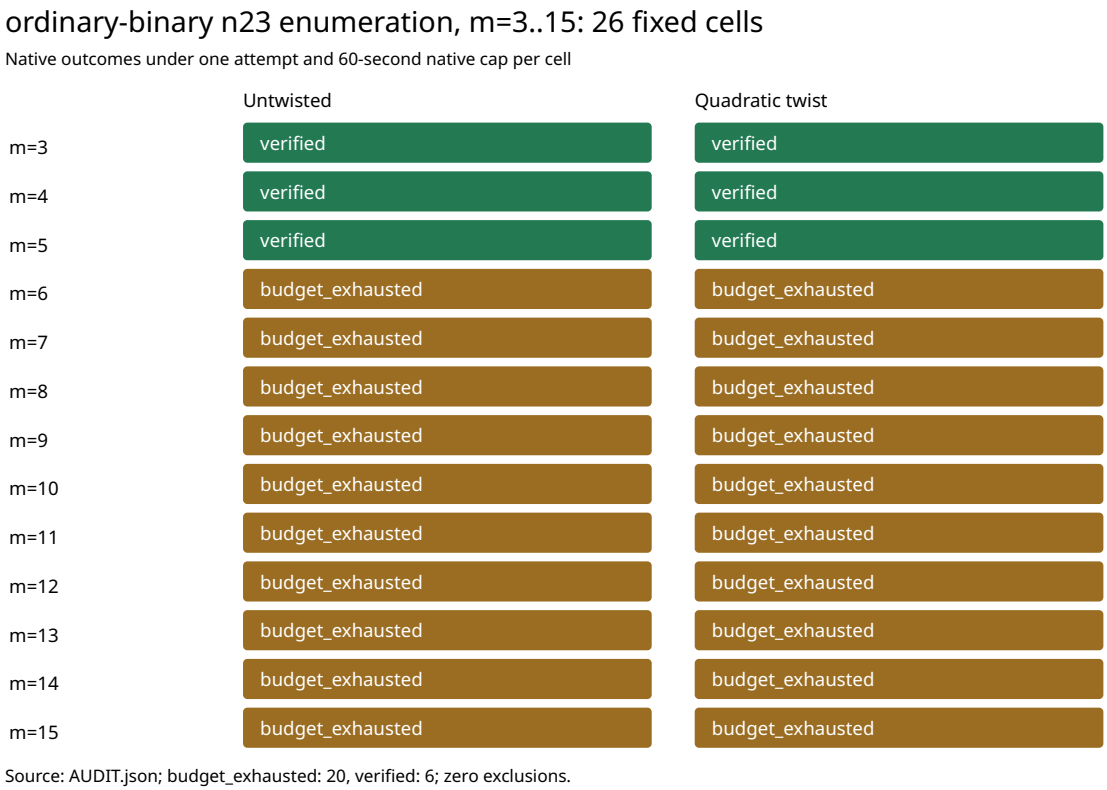

Exact evidence and measurement scope

The pinned official export checker accepted 26 planned and attempted rows, all completed with zero exclusions. Independent audit rehashed 26 archives totalling 7,001,623 bytes and 832 native artifacts. It checked ordinary-binary point-count/twist certificates, coefficient-field degree 23, and matched public inputs across arities. At m3 each cell recorded 64 candidates and 84 group-add transitions, at m4 256 and 340, and at m5 1,024 and 1,364.

There are 104 retained phase telemetry records and zero eligible whole-worker instruction labels. The fixed population supports exact method and custody accounting, with no timing-effect comparison. See `report/run.md` for hashes, receipts, and the distinct planted-positive control dependency.