
N83 K = 16,627 prebuilt base: natural m = 4 gate

The frozen spot-host sequence completed. P2 validated the exact retained base and public target. A1 and A2 each returned the same independently replayed rank-one constructed-selector relation. B was an unpinned public query and wrote `UNKNOWN_budget` at 1,790.010 s. It wrote no attempt or relation receipt and its 4 GiB cgroup recorded no OOM event.

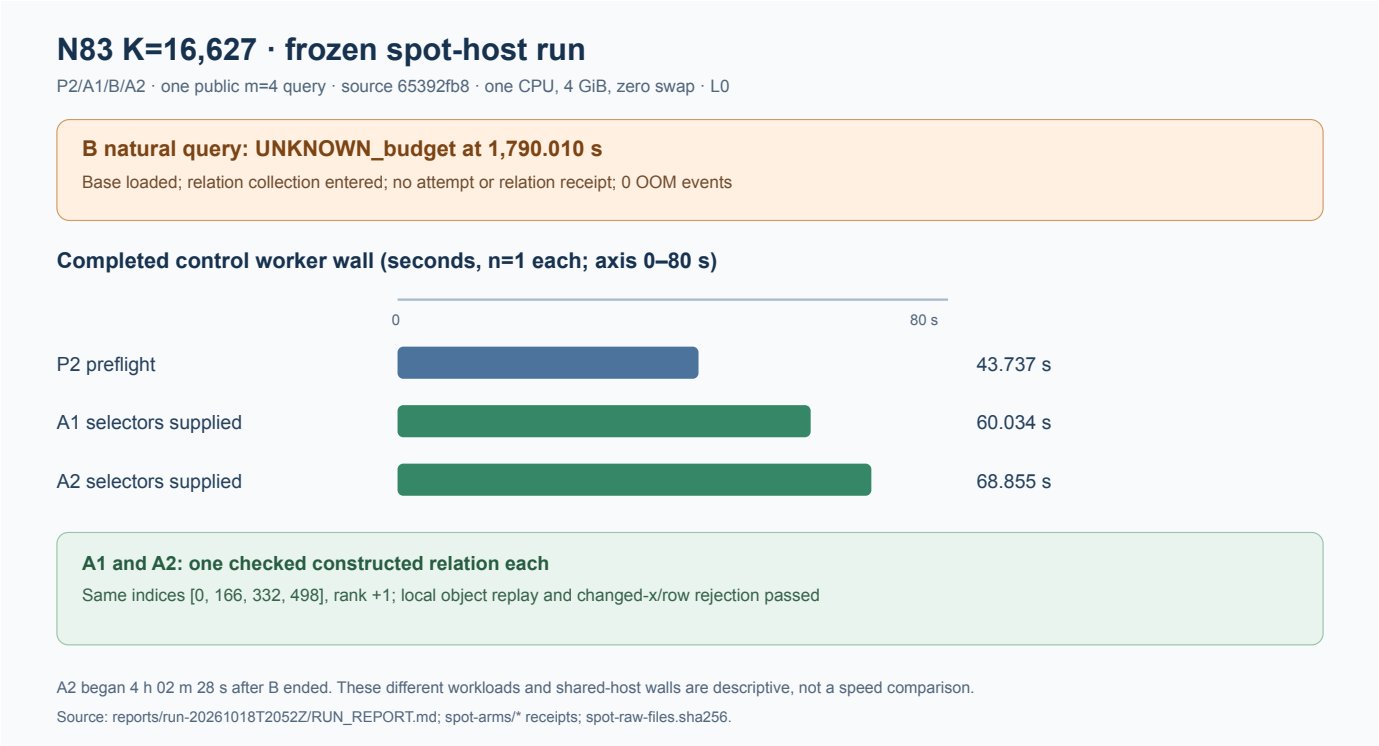

The run was on a shared host, with one CPU and zero swap. P2/A1/B/A2 worker walls were 43.737231/60.034319/1,790.010187/68.854539 s. A2 was delayed by an interrupted local session and began about four hours after B ended. The constructed controls supplied representative selectors, so their times do not yield a natural-query speed ratio. The single capped B arm gives no natural-yield estimate. Its internal search-progress counters were not durably sampled. `selected_best_total_runtime` and complete IC runtime stay null.

The next base-design step is an exact native census of direct-subgroup points with x in the dimension-18 polynomial subspace. A passing count would support an exported and replayed structured K = 16,627 closure for a frozen common-query comparison. Natural relation/rank, m = 2/3 policies, prebuilt-versus-on-demand full costs and matched rho remain open. See `RESULT.md`, `REMOTE_PROTOCOL_V2.md`, the run report and `spot-raw-files.sha256` for source, inputs and every receipt.