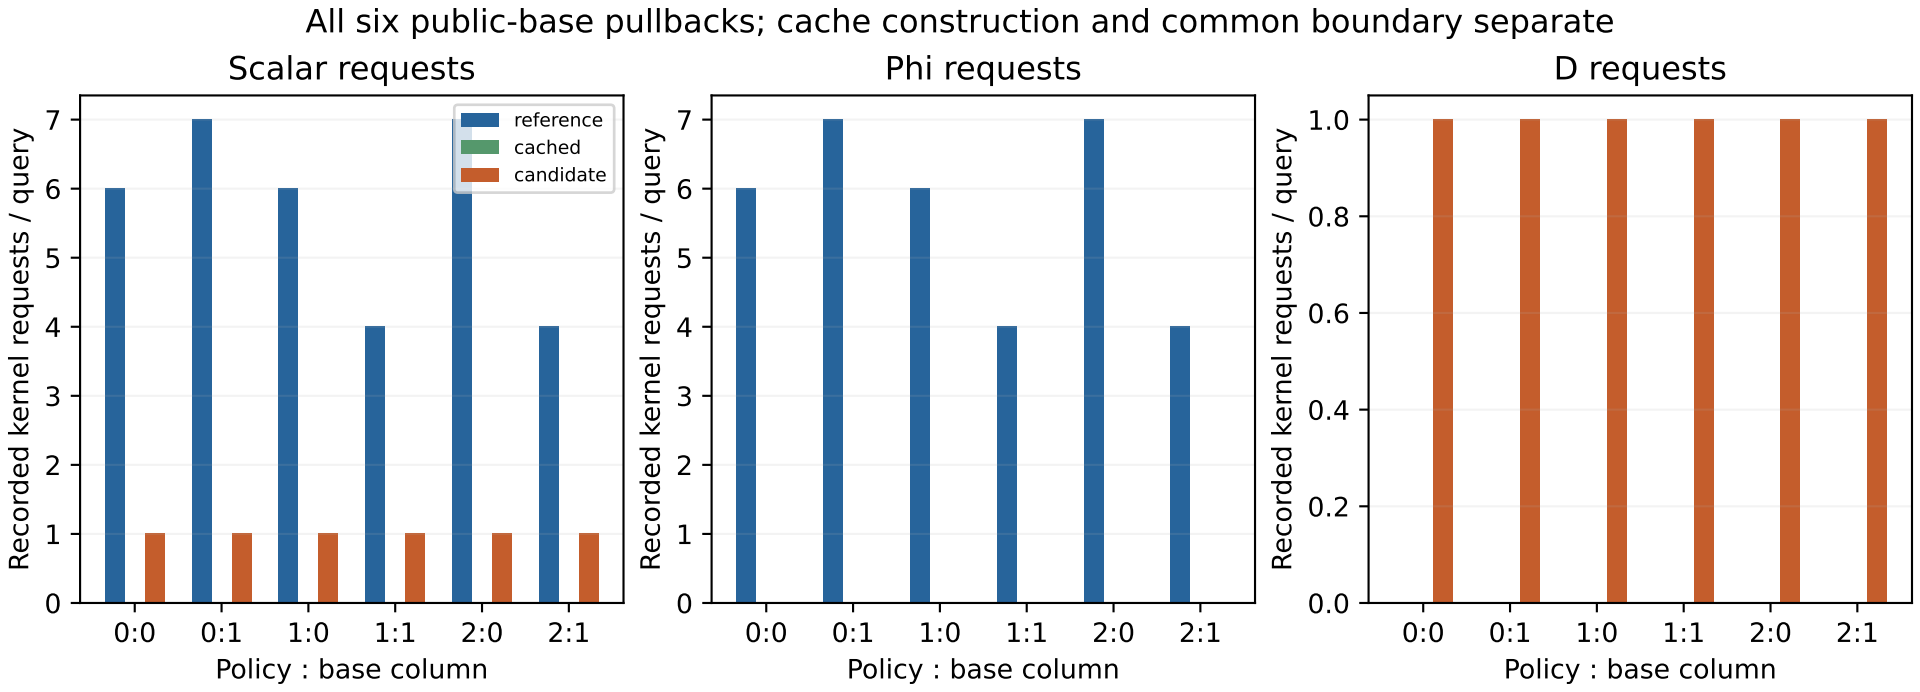
All six public-base pullbacks; cache construction and common boundary separate
Scalar requests
Phi requests
D requests
reference
cached
candidate
Recorded kernel requests / query
Policy : base column
0:0
0:1
1:0
1:1
2:0
2:1
0
1
2
3
4
5
6
7
0.0
0.2
0.4
0.6
0.8
1.0