
All 84 original FreeLIP calls completed

27 October 2026. Frozen scope: human protocol, structured protocol, all 21 original group orders. Mathematical original-order proofs belong to the parent study; this report records software behavior.

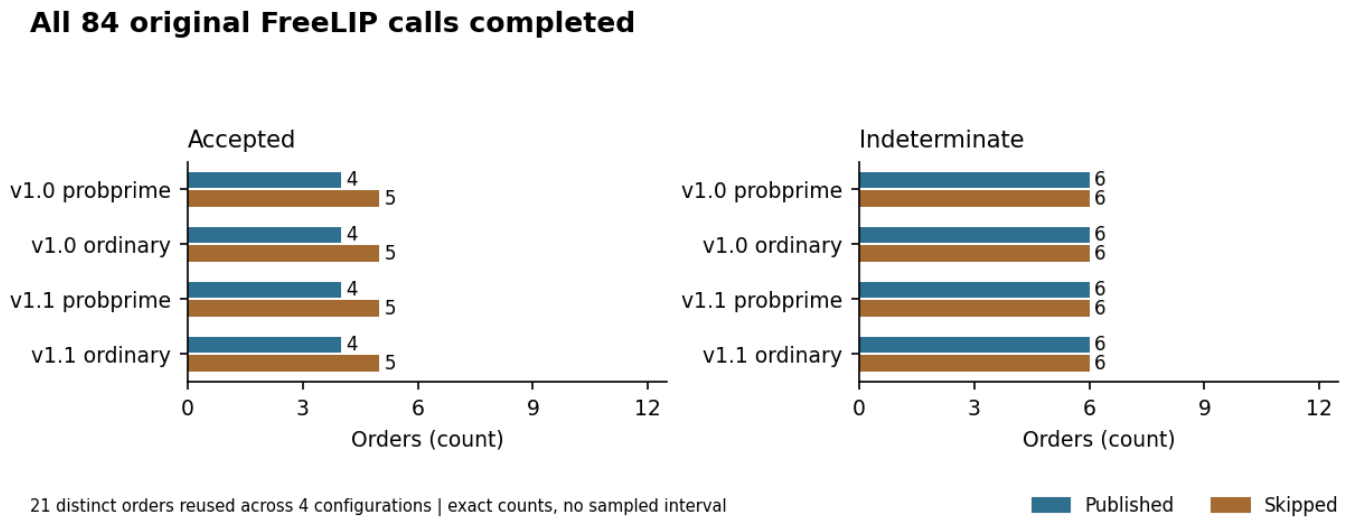

Source 02e5bfc524a0a2564d8e353f32c6c9bd06f731d7 launched four fixed configurations on all 21 orders after a successful S3 source gate and full readback of 417 preparation files. Every original process exited 0 and returned 1. Planned 84, attempted 84, process-completed 84, interrupted 0, resumed 0, excluded 0; 21 distinct historical orders. All 52 generic controls had passed. The initial observer admitted 4 published and 5 skipped orders per configuration and kept 6 published and 6 skipped indeterminate because it expected a single-line root. Original FreeLIP wraps long decimal roots with backslash-newline. Those unknowns and the initial source/summary are preserved. No 0 return, crash or timeout occurred; no initial unknown was a weak, composite or rejected label. Serial limits were 60 seconds per call, 600 seconds total, 768 MiB host address space and 256 MiB guest reservation, with UBsan halt and no retries. Shared managed host and QEMU user mode; no performance isolation or clock admitted.

References and complete source/binary hashes: source audit and prepared package. Original source licenses/notices are preserved. The local fallback and actual denied EKS routes are recorded prospectively; no paid resource, IAM broadening or unrelated default fixture was used.

Raw records are in preparation archive and final archive, with full member manifests and remote readback receipts. All 21 controls remain retained. No original historical caller, attack, security claim or measured DLP is established.