Run report: session A (`ECBS1hf4d23305c958`)

Spec `specs/A-1k-8k.json` (`ECS1h529376370841`), commit `a75e9b407` (clean), binary `797ea0fb…e91b`, host env class `ECBENV2h43ce23acf702` (4-vCPU Xeon VM, Linux 6.18), `ecbench run --wait --cpus auto`, run CPU 3. Started 2026-10-19 16:29 UTC, finished 18:16 UTC.

Workloads 8 targets (target seed 20261019) on `icv1-fp32-t7319-90da43e9`. **Rounds** 5 measured + 1 warm-up, alternate order. **Arms** `rho-neg` (reference); `dense-N` and `cado-N` for N ∈ {1,024, 2,048, 4,096, 8,192} (`ic.pipeline`, `prime-abscissa:size=N`, `mitm:negation_folded=1`; `incremental-gauss-full-rank` vs `sparse-cado`); `cado-4096-aa` (control).

Runs 480 planned, 480 written, 480 verified, 0 failed or timed out. **Isolation earned**: IC runs L1 (hypervisor steal on the run CPU); `rho-neg` L2 (38) and L1 (2). **Audit** OK, 24 exact replays (`sessions/A-1k-8k.audit.json`).

Measured values (means of 40 measured runs per arm)

arm	S (measured)	row_ops	LA wall	relations wall	set-up wall
rho-neg	0.870 [0.678, 1.077]	—	—	—	—
dense-1024	136.07	28,749	61 ms	6.06 s	0.16 s
cado-1024	136.07	43,991	44 ms	6.08 s	0.15 s
dense-2048	129.19	61,209	223 ms	3.37 s	1.05 s
cado-2048	129.19	92,929	113 ms	3.31 s	1.05 s
dense-4096	291.21	129,316	793 ms	1.87 s	5.83 s
cado-4096	291.21	194,343	355 ms	1.72 s	5.86 s
cado-4096-aa	291.21	194,343	363 ms	1.77 s	5.90 s
dense-8192	1044.38	281,907	5.77 s	1.58 s	37.1 s
cado-8192	1044.38	422,323	1.44 s	1.24 s	37.2 s

S intervals from `ecbench table` (`analysis/table-A.md`). Wall times are descriptive (L1). Derived ratios are in `analysis/A-1k-8k.json` (`scripts/analyze.jq`).

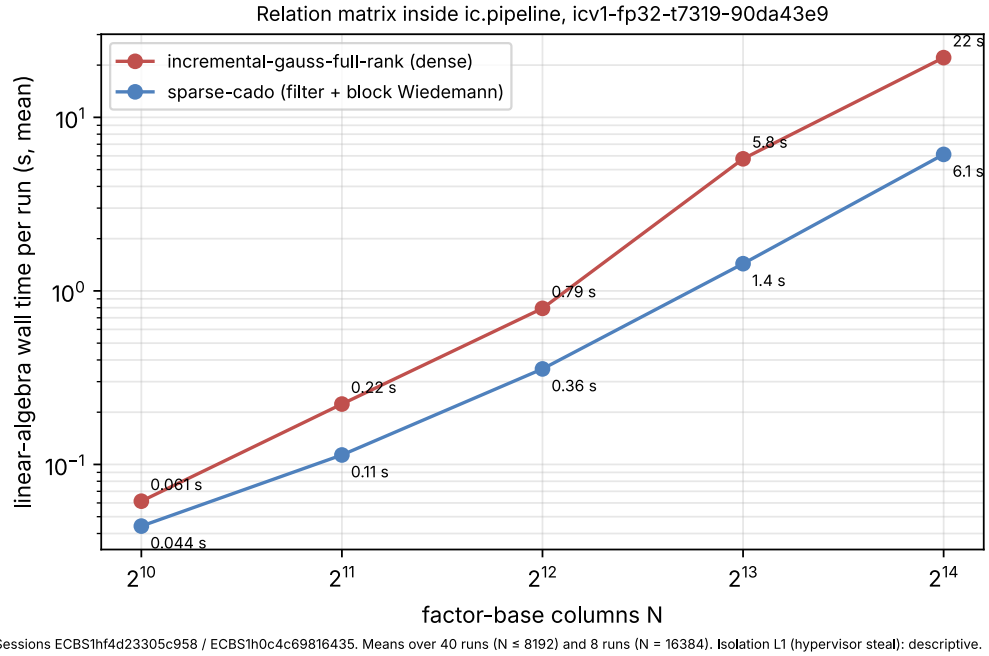


Figure 1: LA wall per run against N; sessions A and B (this run: N ≤ 8,192).

Records: `sessions/A-1k-8k/records.jsonl`. Observations only; the interpretation is in the study README.