Run report: session B (`ECBS1h90cd7a0dc213`, re-run)

Spec `specs/B-16k.json` (`ECS1ha361677676e8`), repository head `855c0bc1f` (clean), binary `c1378033…41c5` (built from `e59331c96`), host env class `ECBENV2h6639ae09b95e`, `ecbench run --wait --cpus auto`, run CPU 3. Started 2026-10-20 08:58 UTC, finished 10:13 UTC.

Workloads the first 4 targets of session A's law and seed. **Rounds** 2 measured + 1 warm-up, alternate order. **Arms** `rho-neg`; `scalar-16384`, `batch-16384`, `blocked-16384`.

Runs 48 planned, 48 written, 48 verified. **Isolation earned**: IC runs L1 (all 8 per arm); `rho-neg` L2 (7) and L1 (1). Fewer than 5 rounds: wall times descriptive by the protocol. **Audit** OK, 6 exact replays (`sessions/B-16k-r2.audit.json`).

Interrupted first attempt `ECBS1h64e9d03d695a` (`sessions/B-16k`), 08:14–08:57 UTC: 26 runs verified, then run 27 (`scalar-16384`) recorded `crashed` by SIGTERM from the operator's tool time limit. Kept unchanged; not analysed.

Measured values (means of 8 measured runs per arm)

arm	S (measured)	set-up wall	relations wall	LA wall	peak RSS
rho-neg	0.802 [0.415, 1.214]	—	—	—	—
scalar-16384	4097.226 [4096.986, 4097.446]	224.1 s	103.7 ms	3.63 s	9.15 GiB
batch-16384	4097.226	116.5 s	102.4 ms	3.74 s	9.15 GiB
blocked-16384	4097.226	28.20 s	96.4 ms	1.61 s	4.65 GiB

S intervals from `ecbench table` (`analysis/table-B.md`). 24 of 24 executions identical across the three oracles; blocked/batched set-up ratio 0.24 (pair range 0.22–0.26), blocked/scalar 0.13 (0.12–0.14). Derived values: `analysis/B-16k.json`.

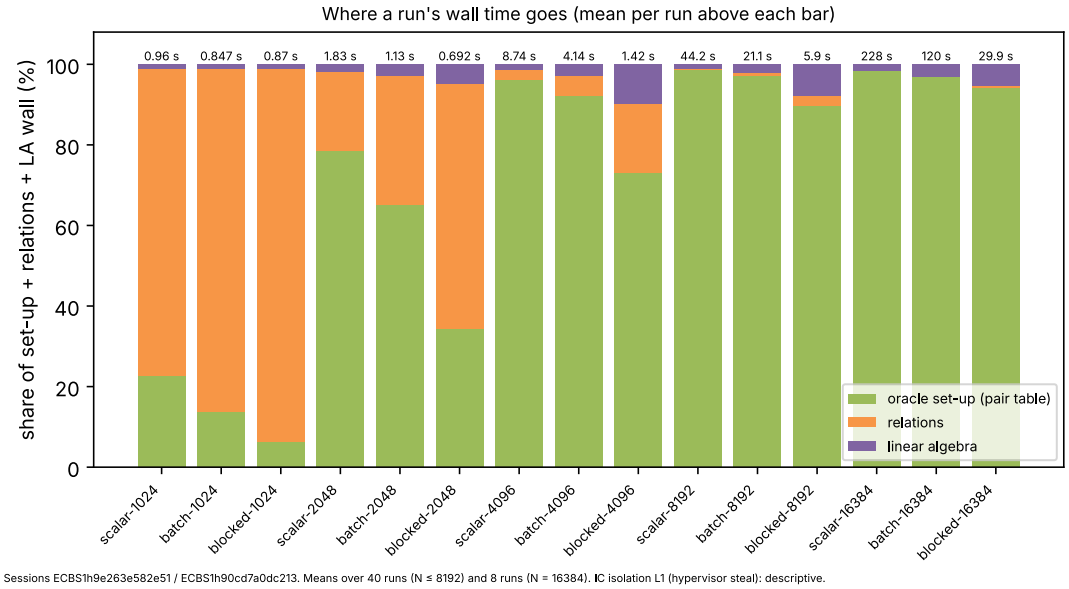


Figure 1: Each phase's share of a run's wall time per arm, sessions A and B.

Records: `sessions/B-16k-r2/records.jsonl`. Observations only; the interpretation is in the study README.