Run report: m1-ell1211653-q45

Session `ECBS1h946e576a470c`, status `complete`, 1024 records; spec `ECS1h264ab8fe07bc` sha256 `264ab8fe07bcd17d…`; binary sha256 `ee0af723cf6c1064…`, git commit `d290558b2657bd320ea2a9964a91238924619763`; env class `ECBENV2ha8c679da3835`; host env class sha256 `a8c679da3835cd97…` (Intel Xeon 6975P-C, 32 logical CPUs, per `ecbench host`). Isolation levels earned: [‘L0’] (shared host, no CPU reservation). Spec label: conductor gap ell=1211653 (2^20..), D=-19, hard kernel, q 45 bits: crater vs 3 floors, 128 shared targets. Arms: rho-neg = rho.negation (reference), rho-neg-aa = rho.negation (control). Workloads: 4 curves × 128 `planted_shared` targets, target seed 2026101811, measurement seed 20261018, rounds 1, warm-up 0. Record outcomes: {‘verified’: 1024}. Unit: S = charged group operations / sqrt(r) (`cost.s`, lower bound: canonicalisations uncharged). Wall time not read. Raw records: `sessions/m1-ell1211653-q45/records.jsonl`.

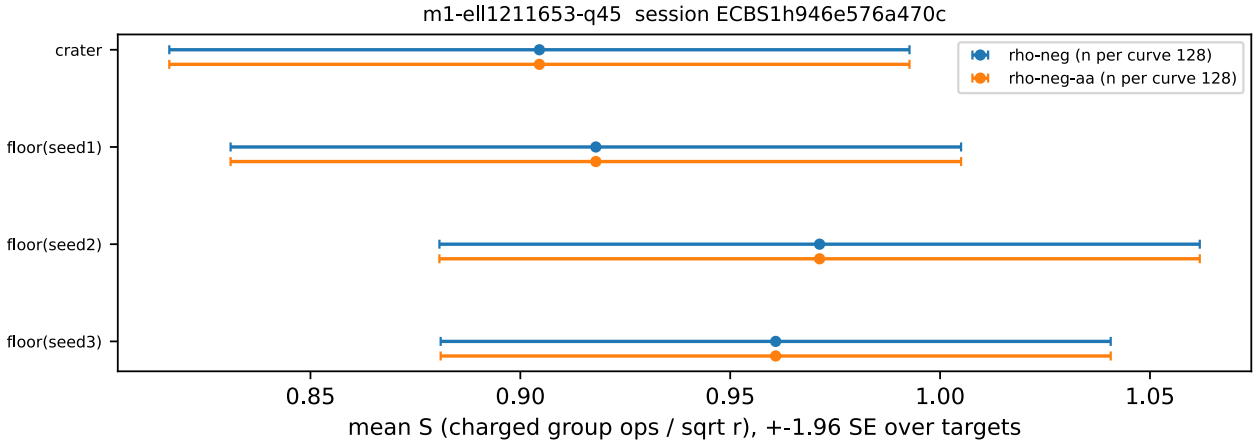


Figure 1: Mean S per curve and arm with ±1.96 SE over targets (recorded values).

arm	curve	slug	n	mean S	SE	min / max
rho-neg	crater	icv1-fp45-t6688791-5bbdfc5b	128	0.9045	0.0450	0.018 / 2.530
rho-neg	floor(seed1)	icv1-fp45-t6688791-954cd116	128	0.9180	0.0444	0.097 / 3.325
rho-neg	floor(seed2)	icv1-fp45-t6688791-8d4d0b3f	128	0.9713	0.0462	0.020 / 2.786
rho-neg	floor(seed3)	icv1-fp45-t6688791-23a17747	128	0.9608	0.0407	0.092 / 2.028
rho-neg-aa	crater	icv1-fp45-t6688791-5bbdfc5b	128	0.9045	0.0450	0.018 / 2.530
rho-neg-aa	floor(seed1)	icv1-fp45-t6688791-954cd116	128	0.9180	0.0444	0.097 / 3.325
rho-neg-aa	floor(seed2)	icv1-fp45-t6688791-8d4d0b3f	128	0.9713	0.0462	0.020 / 2.786
rho-neg-aa	floor(seed3)	icv1-fp45-t6688791-23a17747	128	0.9608	0.0407	0.092 / 2.028