Run report: Part A sessions A-n11, A-n13, A-n17 (launch 2026-10-12 02:30 UTC)

Descriptive run report (research-visuals, "Every experiment run"): what ran and what was recorded; interpretation is in the study README.

Sessions

- `A-n11`: session `ECBS1hb842db9ff0ac`, spec `ECS1ha99bdb902e95` (pdp_split_slots_20261012 Part A, n=11); status `complete`, 48 executions planned, status counts `{"verified": 48}`; commit `94428d2ae7d85c8f5db78530298bb92d741c8fe4` (dirty: False), binary SHA-256 `226a31f06997964c…`; targets: 8 per curve, seed 202610121101, rounds 1, isolation required L0.
- `A-n13`: session `ECBS1h2c0810d330ce`, spec `ECS1h8c7e4bddda48` (pdp_split_slots_20261012 Part A, n=13); status `complete`, 48 executions planned, status counts `{"verified": 48}`; commit `26233e4b77f046e4fbd237b93df9117dcd0e6e35` (dirty: False), binary SHA-256 `226a31f06997964c…`; targets: 8 per curve, seed 202610121101, rounds 1, isolation required L0.
- `A-n17`: session `ECBS1haa051de697f4`, spec `ECS1h60403669a052` (pdp_split_slots_20261012 Part A, n=17); status `complete`, 32 executions planned, status counts `{"verified": 32}`; commit `26233e4b77f046e4fbd237b93df9117dcd0e6e35` (dirty: False), binary SHA-256 `226a31f06997964c…`; targets: 8 per curve, seed 202610121101, rounds 1, isolation required L0.

Recorded values (medians over verified runs; per-workload values in ANALYSIS.json)

curve	arm	verified	median S (recorded)	median F4 XORs	median systems	median priced S	priced ÷ strong rho (min–max)
icv1-f2m11-t67-05f5aa36	clo-chain-g4	8/8	16.339	2.577e+08	25.5	22449.379	1133.383 (75.7–1.49e+03)
icv1-f2m11-t67-05f5aa36	clo-unsplit-g4	8/8	16.339	7.808e+06	23.0	695.666	35.705 (2.52–52.2)
icv1-f2m11-t67-05f5aa36	rho-frob	8/8	2.700	—	—	2.700	0.133 (0.00732–0.162)
icv1-f2m11-t67-05f5aa36	rho-strong	8/8	19.743	—	—	19.743	1.000 (1–1)
icv1-f2m11-t67-05f5aa36	std-chain-g4	8/8	18.814	6.264e+08	53.5	54535.836	2636.196 (202–3.68e+03)
icv1-f2m11-t67-05f5aa36	std-unsplit-g4	8/8	18.814	1.992e+07	53.5	1753.772	85.119 (6.71–120)
icv1-f2m13-t181-515ee569	clo-chain-g4	8/8	13.364	8.391e+08	36.0	43211.085	3025.808 (2.31e+03–4.05e+03)
icv1-f2m13-t181-515ee569	clo-unsplit-g4	8/8	13.364	1.688e+07	36.0	882.070	60.298 (48.6–80.5)
icv1-f2m13-t181-515ee569	rho-frob	8/8	1.799	—	—	1.799	0.125 (0.107–0.146)
icv1-f2m13-t181-515ee569	rho-strong	8/8	14.318	—	—	14.318	1.000 (1–1)
icv1-f2m13-t181-515ee569	std-chain-g4	8/8	16.887	1.486e+09	70.5	76539.088	5341.416 (2.86e+03–8.25e+03)
icv1-f2m13-t181-515ee569	std-unsplit-g4	8/8	16.887	3.912e+07	70.5	2030.543	141.705 (75.6–219)
icv1-f2m17-tm101-00378d4e	clo-unsplit-g4	8/8	3.631	1.509e+10	156.5	1.151e+05	25257.008 (2.07e+04–3.72e+04)
icv1-f2m17-tm101-00378d4e	rho-frob	8/8	1.002	—	—	1.002	0.213 (0.141–0.305)
icv1-f2m17-tm101-00378d4e	rho-strong	8/8	4.223	—	—	4.223	1.000 (1–1)
icv1-f2m17-tm101-00378d4e	std-unsplit-g4	8/8	5.359	4.052e+10	398.0	3.091e+05	68366.748 (4.53e+04–1.25e+05)

`S` = charged group-addition equivalents / √r. F4 arms: solver word XORs counted, not charged, so recorded S is a lower bound. Priced S adds XORs × the curve's pinned `ns_per_word_xor` (`docs/ic/calibration.json`, calibrated on another host) / √r: a sensitivity, and one that understates F4′s per-call work. Table arms (`mitm-frobenius`) are fully charged. Wall time is descriptive only (L0).

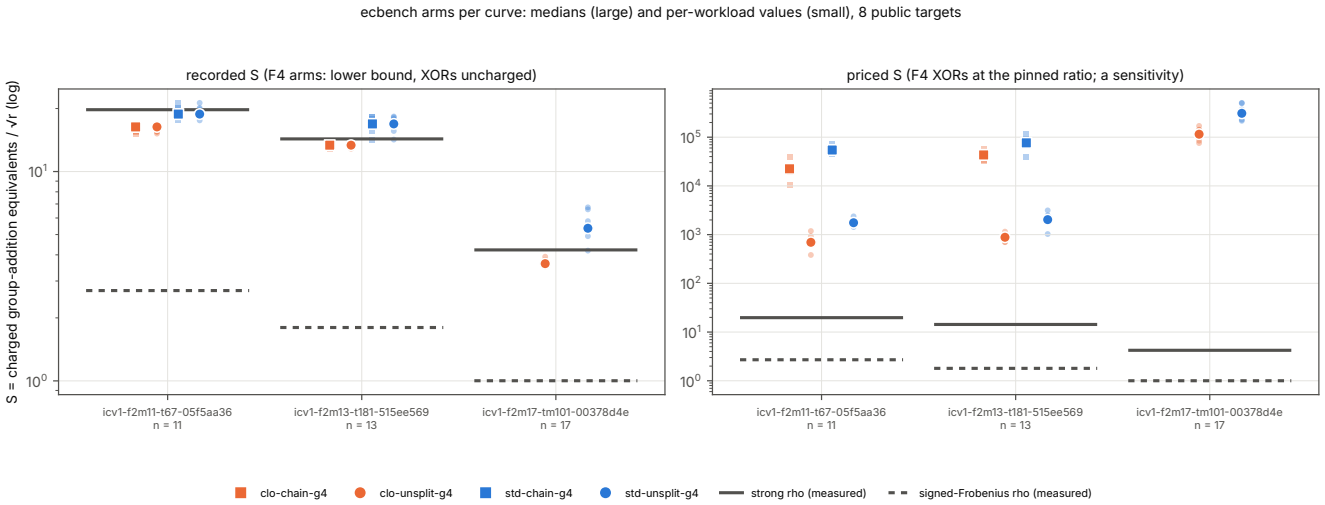


Figure 1: Recorded values from ANALYSIS.json; layout `reports/plot_ecbench.py`.

Raw records

`research/pdp_split_slots_20261012/sessions/A-n11/records.jsonl`, `research/pdp_split_slots_20261012/sessions/A-n13/records.jsonl`, `research/pdp_split_slots_20261012/sessions/A-n17/records.jsonl`; audits under `audits/`.

A session marked dirty ran with untracked or modified files in the checkout (drafts of this study's own reports and protocols); the binary SHA-256 above is the one `BINARIES.sha256` records, and `ecbench verify` replays against it.