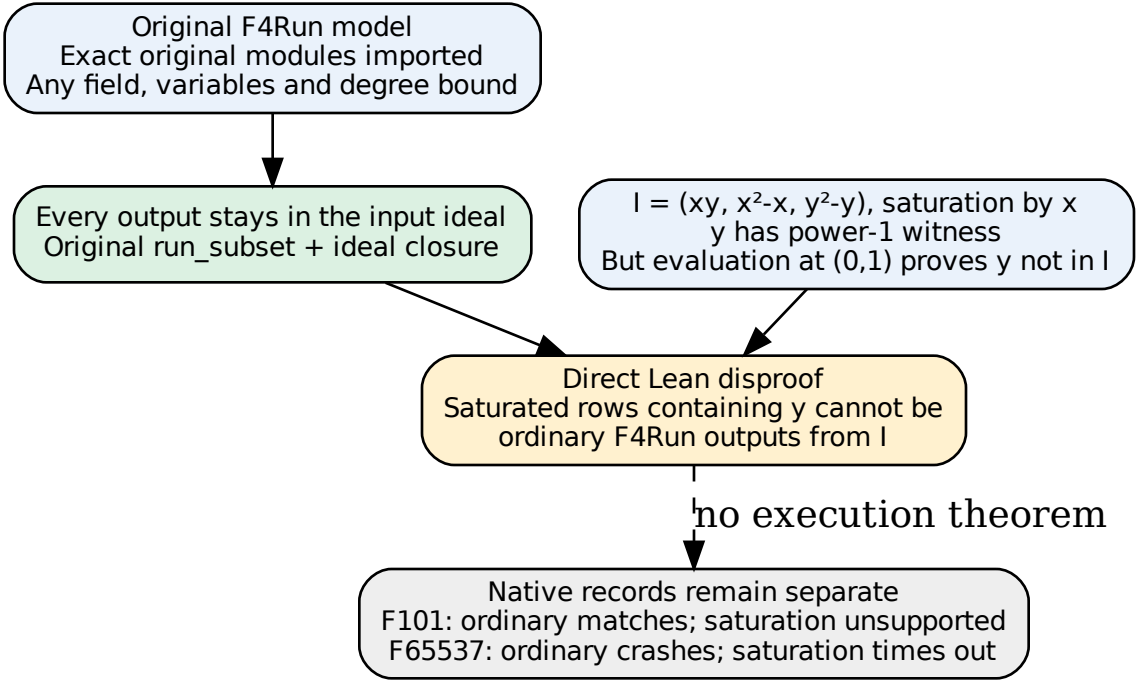
Original F4Run model
Exact original modules imported
Any field, variables and degree bound
Every output stays in the input ideal
Original run_subset + ideal closure
I = (xy, x²-x, y²-y), saturation by x
y has power-1 witness
But evaluation at (0,1) proves y not in I
Direct Lean disproof
Saturated rows containing y cannot be
ordinary F4Run outputs from I
no execution theorem
Native records remain separate
F101: ordinary matches; saturation unsupported
F65537: ordinary crashes; saturation times out