Recorded Cantor witness candidates

Both fixed-input cells completed: 25 cycle candidates and 100 complete-model candidates for $y^2 = x^5 + 1$ over F3. Every recorded candidate passed the native polynomial assertions and matched its existing, separately implemented C++-checked table entry. These are candidate certificates; Lean acceptance is a separate check. [pcc:unverified]

Recorded value	Cycle	Full model
Ordered pairs / table matches	25 / 25	100 / 100
High-degree reductions	6	48
Non-one normalization units	0	12
Exit status	0	0
Diagnostic seconds	0.07	0.08

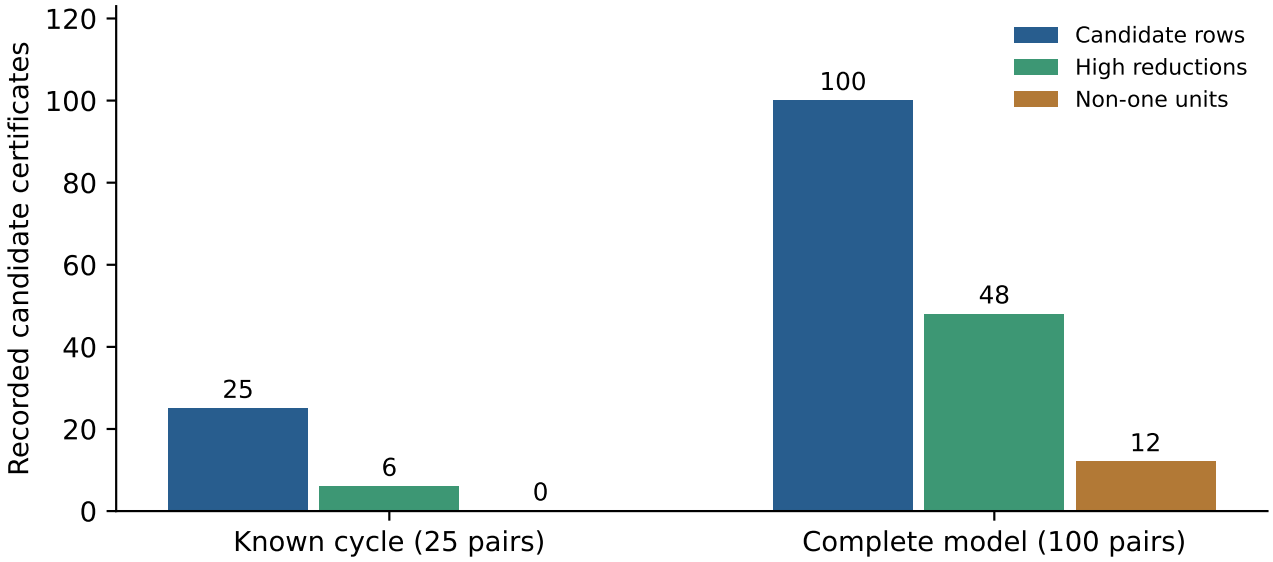

Figure 1: Recorded counters from AUDIT-STOLL-WITNESSES-v1, one complete fixed-input cell per arm; no sampling interval. All 25 cycle pairs also occur in the full 100-pair cell.

The frozen protocol has a documentation defect: both generic parameter blocks incorrectly say $X^5 - X$ and mode=fixture. Its question, flags, source and input hash specify the Stoll $X^5 + 1$ model, and the pinned source explicitly rejects a different curve or pair count. The actual run follows those source assertions. **We do not claim full protocol conformance.** The frozen bytes remain unchanged; see the separate deviation receipt. [pcc:unverified]

Source `3dd8d410` and protocol hash prefix `cd194533` were committed and published before calls (remote source/protocol publication `a0bfea7f`). The exact Rust lock and unchanged pinned vendor backend are retained. Binary hash prefix `69cb98ed` is checked before arithmetic; the old raw reference hash prefix is `cf8ec5cf`. Full hashes are in the export/protocol. [pcc:unverified]

Execution, controls and formal boundary

Flow: two planned, two attempted, two completed, zero failed, timed out, resumed, interrupted or excluded. One fixed model; complete ordered input populations of 5 and 10 points. Seeds 202611092901 and 202611092902 label cycle and full executions. No warmup, retries or stochastic sampling. Both calls used existing local capacity, one thread, host `762f5fc120c9`, isolation L0 and zero paid compute. All clocks are scientifically invalid; reported intervals are diagnostics and support no speed claim. Hard caps were 120 seconds per cell, 240 total; the earlier 120-second planning estimate was not a measured generator runtime. [pcc:unverified]

The source checks the frozen inputs and the reference model's 10 valid pairs, 8 split-u pairs and complete table. It reuses the pinned native backend and asserts common-divisor identities, Bezout identity, composition/numerator division, remainder and normalization factor. The control uses the previously Lean-checked five-cycle. This execution is on the producer host; it is not an independent-machine validation. [pcc:unverified]

Twelve full-model reductions use a non-one normalization unit. This explains why the previous constant-v special relation cannot simply be applied unchanged to every point. It is not a counterexample to the qualified Cantor formula, which includes normalization. [pcc:unverified]

Raw output's kernel_proof_status=not_checked is preserved literally. New Lean files must independently prove every recorded witness equation, uniqueness of deterministic arithmetic, the full group operation and subgroup fraction inequality. A failed tactic is not a mathematical counterexample. The geometric Picard/Jacobian bridge and qualified asymptotic or large-prime heuristics remain separate obligations. [pcc:unverified]

Evidence: `../../evidence/stoll-witness-v1/export.json`, `raw-manifest.json`, both exact raw output directories and `protocol-deviation.json`; frozen source/protocol in `../../stoll-witness-v1/`. No signed independent replay/recompute exists; scientific standing remains unsigned/unverified. Source context is Stoll2014 Theorem4.18/Example4.19 at the read scopes recorded in `../../stoll-sources.json`. Original Cantor1987 remains unread after403. No novelty claim is made. [pcc:unverified]