
N83 K = 16,627: planted four-summand control

Run: 2026-10-18 UTC. **Curve:** `icv1-f2m83-tm6151469093347-debefd74`. The protocol was committed before worker edits (`PROTOCOL.md`), and the exact object digests were clarified before execution (`INPUT_ADDENDUM.md`). The source snapshot binds clean commit `1322cb5681d31849a2f33a6b47e16f9e3d598e0a`. The full account and links to raw records are in `RUN_REPORT.md`.

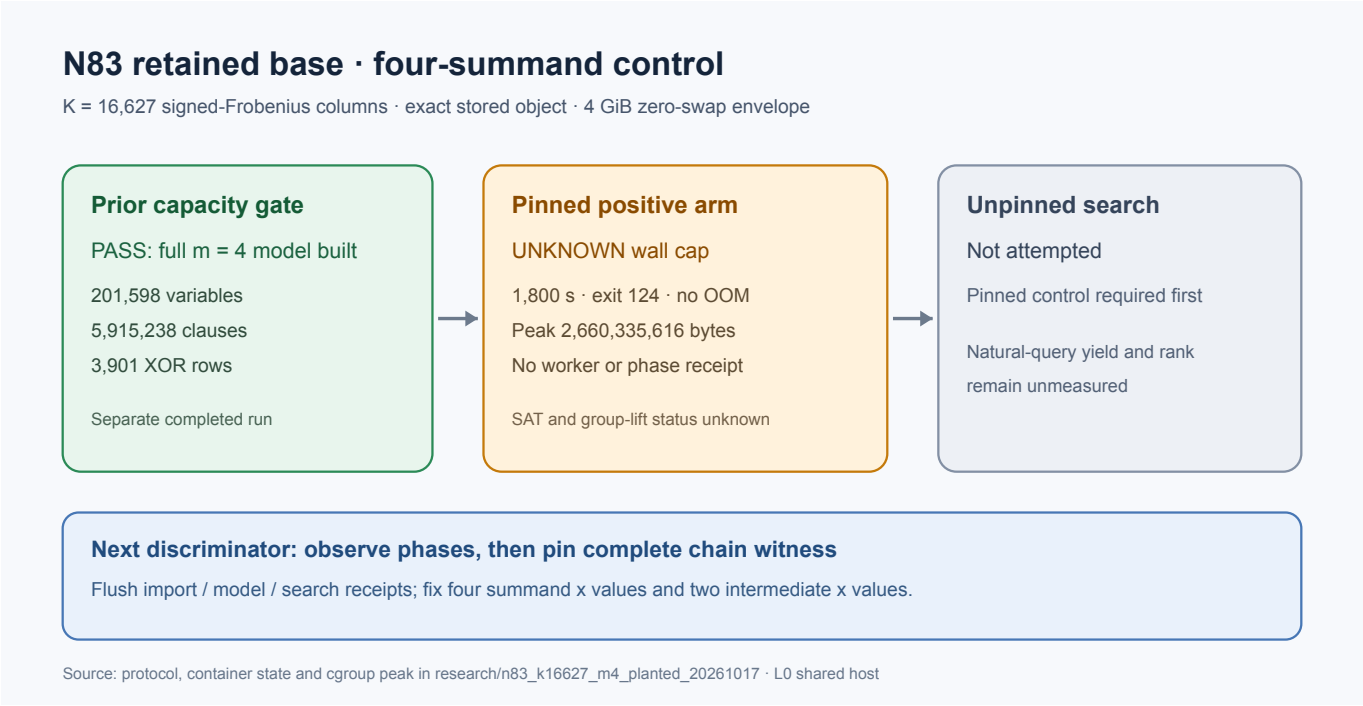

Observed bounded result

Measure	Pinned positive arm
Status	`UNKNOWN_wall_cap`
Outer cap / exit	1,800 s / 124
Cgroup memory peak	2,660,335,616 bytes
OOM	false
Worker receipt	absent
Phase / conflicts / SAT models	unknown / unknown / unknown
Group relation / rank	unknown / unknown
Unpinned arm	not attempted; positive prerequisite unverified

The retained base has 16,627 signed-Frobenius columns and 2,760,082 points; its exact compressed object and point-set digests were checked before the run. The native arm64 release worker built offline; the touched exporter passed 19/19 tests. The fresh worker container had one CPU, 4 GiB hard memory, zero swap, no network and a read-only root. Its UTC interval was 01:11:04 to 01:41:04. `pinned/` contains the outer outcome, container state, host config, cgroup peak and empty stdout/stderr.

The pre-stack release library suite passed 4,216 tests with 117 ignored. After stacking on the capacity-study branch, its release build stopped at 26 inherited ecbench/Gaudry compilation errors before tests ran. The two touched Rust files pass formatting; repository-wide formatting fails on four unchanged files. `VALIDATION.md` links the complete logs and commands.

The worker wrote no phase or result JSON before the outer timeout. The stopped phase cannot be identified from this receipt, and a SAT answer or group relation cannot be inferred. The earlier full-model capacity pass is a separate completed run; its cost cannot be combined with this censored run into an end-to-end index-calculus measurement. The IC scoreboard remains unchanged. The next frozen experiment should flush phase markers and pin the planted intermediate x values so the complete chain witness can be checked under a bounded SAT search.