
N83 K = 16,627: spot-host natural-query run

Interval: 2026-10-18 20:52:39 to 2026-10-19 01:29:24 UTC. **Protocol:** `REMOTE_PROTOCOL_V2.md`, frozen before P2/A1/B/A2. Public primary curve `icv1-f2m83-tm6151469093347-debefd74`, fixture 0, policy `public_x_hash`, seed 2026100801, m = 4. Retained base: 16,627 signed-Frobenius columns, 2,760,082 points, compressed-object BLAKE3 `1aa70cc1571f4cb25af42936699378329128a869f2ae8ad35efb375663d4e59d`. Worker source commit `65392fb874584a0a5845515f0f8de0510b9c702c`; x86_64 worker SHA-256 `326afc55077c080daae40244da5dfdecf2916c65c587260c3fca09f2a17b1887`.

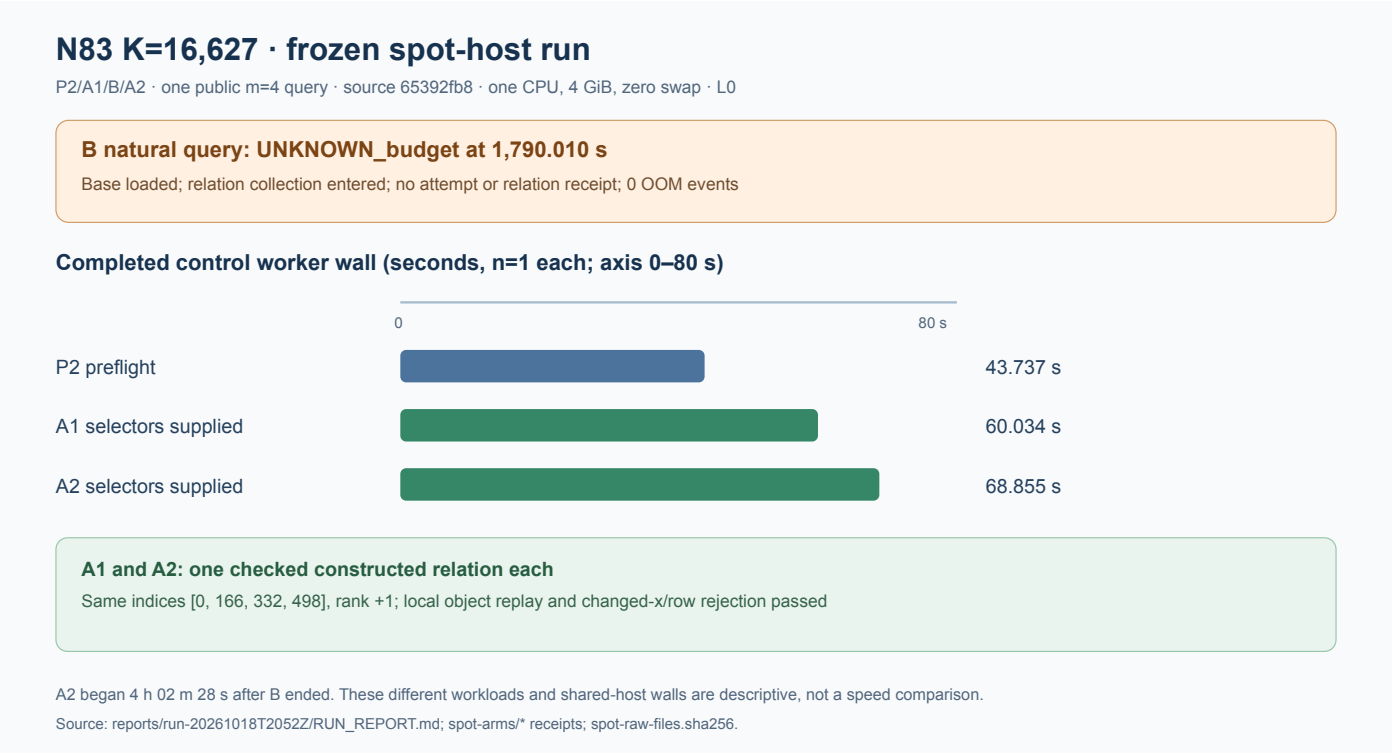

Observed arms

Arm	Exit/status	Process wall	Peak bytes
P2 preflight	0 / PREFLIGHT_ONLY	43.737231 s	2,569,699,328
A1 selectors	0 / PASS	60.034319 s	2,569,474,048
B natural	124 / UNKNOWN_budget	1,790.010187 s	2,569,474,048
A2 selectors	0 / PASS	68.854539 s	2,569,539,584

One CPU, a hard 4 GiB cgroup, zero swap and network denial were enforced on shared EC2 `i-01f85a6c905181498`; wall times are L0 diagnostics. P2 imported the base in 34,768.419 ms and validated the public point in 2.940 ms. A1/A2 imported it in 43,121.059/48,937.666 ms and recorded solver fields of 15,923.239/19,098.983 ms. Each returned the same group-checked rank-one constructed-selector relation. A separate local native replay checked both receipts and rejected changed-x and changed-row inputs.

B loaded the base and entered relation collection at 61.656 s, then wrote `UNKNOWN_budget` at its 1,790-second internal limit. No attempt, progress, relation or rank receipt exists for B. `memory.events` records zero OOM events. A2 began 4 h 02 m 28 s after B ended because the local session was interrupted. Different workloads and the shared host prevent a timing ratio. The 100-file `spot-raw-files.sha256` manifest binds complete raw outputs and the control replays. P1′s earlier cgroup-path infrastructure failure is retained separately. The full path-by-path report is `RUN_REPORT.md`.