Run report: m2-ell1138019-q45

Session `ECBS1h997ff8aee43b`, status `complete`, 1024 records; spec `ECS1h544555e68970` sha256 `544555e68970c791…`; binary sha256 `ee0af723cf6c1064…`, git commit `d290558b2657bd320ea2a9964a91238924619763`; env class `ECBENV2ha8c679da3835`; host env class sha256 `a8c679da3835cd97…` (Intel Xeon 6975P-C, 32 logical CPUs, per `ecbench host`). Isolation levels earned: [‘L0’] (shared host, no CPU reservation). Spec label: conductor gap ell=1138019 (2^20..), D=-19, hard kernel, q 45 bits: crater vs 3 floors, 128 shared targets. Arms: rho-neg = rho.negation (reference), rho-neg-aa = rho.negation (control). Workloads: 4 curves × 128 `planted_shared` targets, target seed 2026101812, measurement seed 20261018, rounds 1, warm-up 0. Record outcomes: {‘verified’: 1024}. Unit: S = charged group operations / sqrt(r) (`cost.s`, lower bound: canonicalisations uncharged). Wall time not read. Raw records: `sessions/m2-ell1138019-q45/records.jsonl`.

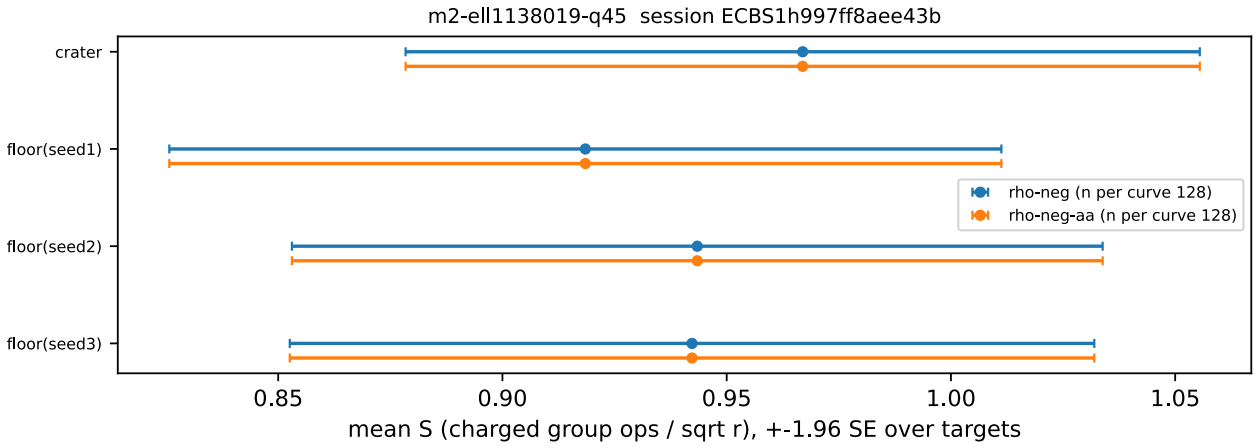


Figure 1: Mean S per curve and arm with ±1.96 SE over targets (recorded values).

arm	curve	slug	n	mean S	SE	min / max
rho-neg	crater	icv1-fp45-t10055507-57efa2c7	128	0.9669	0.0452	0.048 / 2.159
rho-neg	floor(seed1)	icv1-fp45-t10055507-466680bc	128	0.9185	0.0473	0.110 / 2.518
rho-neg	floor(seed2)	icv1-fp45-t10055507-53f8dd81	128	0.9434	0.0461	0.087 / 2.984
rho-neg	floor(seed3)	icv1-fp45-t10055507-561646d3	128	0.9423	0.0458	0.124 / 2.265
rho-neg-aa	crater	icv1-fp45-t10055507-57efa2c7	128	0.9669	0.0452	0.048 / 2.159
rho-neg-aa	floor(seed1)	icv1-fp45-t10055507-466680bc	128	0.9185	0.0473	0.110 / 2.518
rho-neg-aa	floor(seed2)	icv1-fp45-t10055507-53f8dd81	128	0.9434	0.0461	0.087 / 2.984
rho-neg-aa	floor(seed3)	icv1-fp45-t10055507-561646d3	128	0.9423	0.0458	0.124 / 2.265