
Three-guess independent replay: complete draw 0

Original fixture from PR 2429: $(m, n, \ell) = (3, 22, 8)$, draw 0, 46 declared variables, guesses $[7, 15, 23]$, degree four, all eight assignments. Each process has a 140,000-column, 12 GiB address-space and 900-second cap. The internal library caps were explicitly raised to match the instrument; eight earlier immediate engine-cap refusals are retained unscored.

All eight measurement processes exited zero. None refutes. Branches 0–3 saturate at rank 129,221, branches 4–7 at 129,473, against 136,698 columns. The branch-0 rank agrees exactly with the upstream result; the other seven branches were unmeasured there. Every branch is charged: the native total is 4,738,566,310,210 solver word operations and 5,982,980 closure products. Elapsed time is diagnostic at L0.

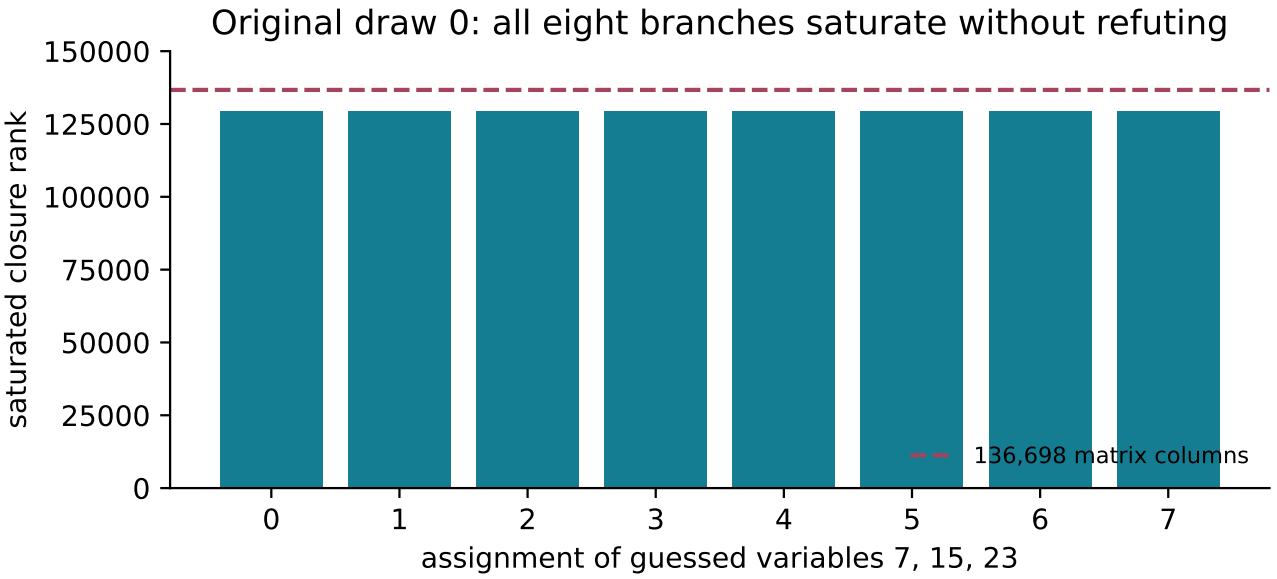

This disproves sufficiency of this three-set on this draw. It does not establish a minimum over all subsets, an ell=9 result, a complete decomposition algorithm, or an IC improvement. Other draws and alternative three-sets remain open. The original upstream four-set is an unmerged upper bound, not a new result here.

Raw paths: `../../runs/guess-balanced-k3-d0-b*-20261023-02/`. The native report-data recomputation checks all eight rows, caps and statuses.