
Koblitz n23, m=3–15: fixed enumeration wave

All 26 frozen native cells have terminal restricted S3 custody. The same public field, curve, generator and target were used at every arity within each twist. Both twists at m3 and m4 completed and verified exhaustive fixed-factor-base negatives. Both twists at every m5–15 reached the frozen 30-second native cap; those results are censored. No PDP witness or independently recovered ECDLP scalar was promoted.

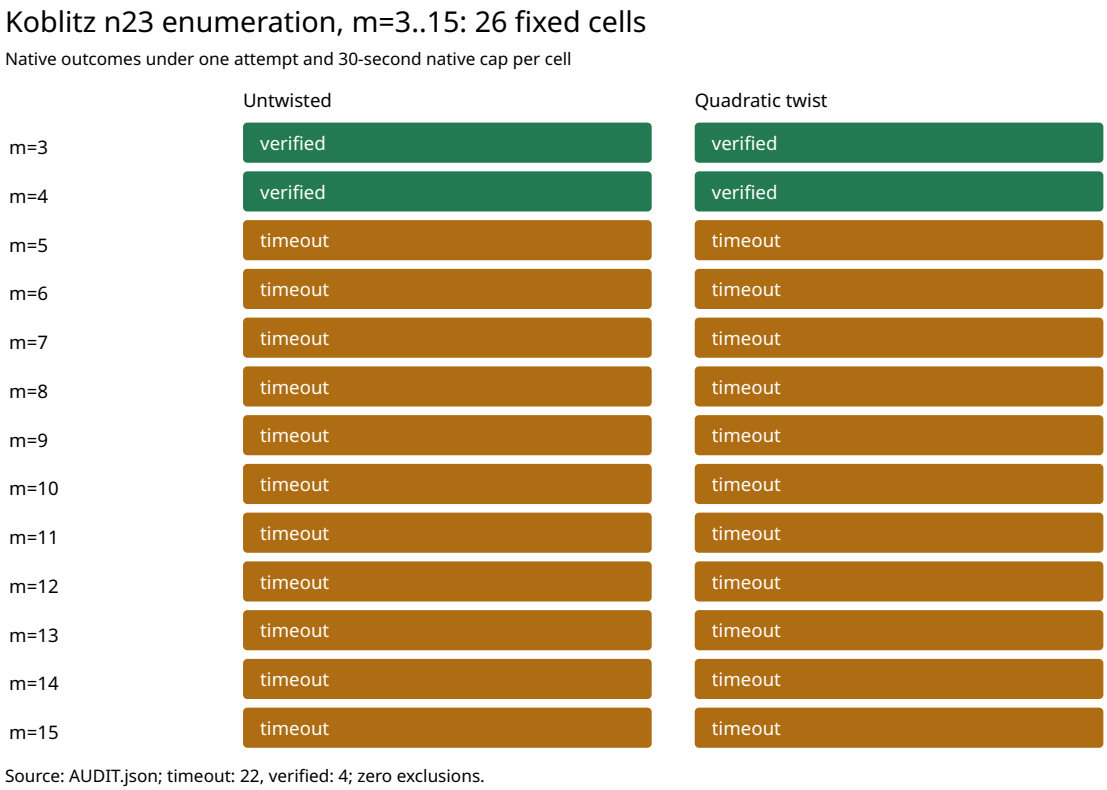

Source: AUDIT.json; timeout: 22, verified: 4; zero exclusions.

Exact evidence and measurement scope

The pinned official export checker accepted 26 planned and attempted rows, four completed and 22 timed out, with zero exclusions. The independent audit rehashed 26 archives totaling 8,849,802 bytes and 685 native artifacts; it checked curve and twist certificates, coefficient-field degree one, and the matched public input at each arity. The completed m3 cells recorded 512 complete candidates and 584 group-add calls apiece; the completed m4 cells recorded 4,096 and 4,680, respectively.

Eighty-two phase telemetry records are retained, but zero whole-worker instruction labels qualify for training. An unrelated release compile was observed during later cells, so timeouts remain resource-conditioned; no timing-effect comparison is made. Index 18 had one sealed native attempt and an interrupted pointer client. Fresh S3 reads proved both content-addressed objects already existed; custody was completed without another PUT or trial. See `report/run.md` for hashes, exact receipts and controller amendment.