
N83 r29 fixed factor bases and model diagnostic

The fixed-base enumeration covered 134,217,728 candidate x-coordinates for each of the Koblitz, general binary, and prime families. It retained 134,195,671, 134,226,535, and 134,206,522 affine points, respectively, and reused each exact base for m=2 through 9. The 384 payload/receipt shard pairs cover contiguous selector ranges; the local index validation and all 48 PDP input membership checks passed.

The exploratory seven-base training set has 336 matched rows. Its target is the midpoint of a finite top-form degree interval, not exact degree of regularity, FFD, or LFD. The grouped leave-one-base-out ridge fit has aggregate MAE 2.5022 against 0.0000 for a matched-configuration baseline and wins zero of seven held-out bases. All 48 matched top-form outcomes are identical across the bases, so this fit finds no elite-base lead.

The diagnostic identifies a sampling limitation: planted tuples use common support in the low 26 coordinates, and all seven bases repeat the same point tuples in these PDP inputs. A lead-generating follow-up must sample base-specific targets across the full 134-million-selector domain while retaining the present common-support panel as a control. This is a post-label diagnostic and does not establish a general base-quality result.

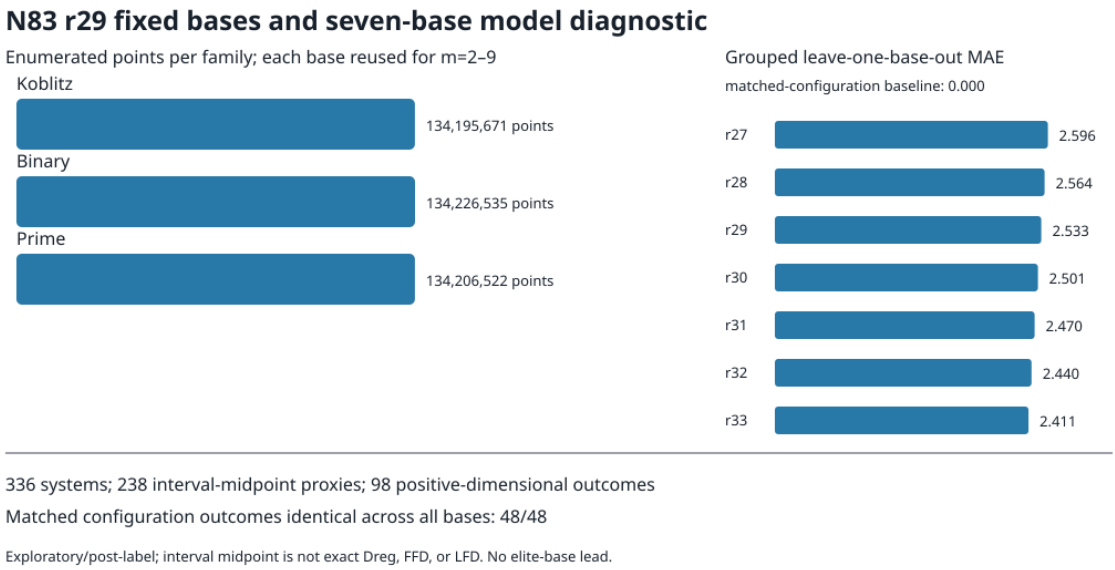

Source files: factor-base index summary SHA-256 `f6787fb737fb988bcd5089fb1cb755b81f8745a7016e93d37d7c15bf87874236`; model protocol SHA-256 `2141d9f99a8bc07641b63db1a89d8f7fcaae9d29b4dfee6607e76592ec38e114`.