Initial serial clearing and failed multiworker control


Run 20261019-030905-boolean-native-serial-cl-25ad47. Same-binary KIC_GF2_SERIAL_CLEAR=0/1; single-write/vector tables stay enabled in both arms. Five baseline A/A and five A/B pairs for each F4/F5 matrix at n17 seed230 and n23 seeds230/231/232. Four-worker seed230 controls keep the original parallel path. Exact raw/canonical rows, rank and counted XOR/profile work agree.


Host: Intel(R) Xeon(R) Platinum 8488C; rustc 1.99.1 (58cf8f9c3 2026-10-13); c7i.2xlarge on-demand, reserved physical cores/SMT siblings: one=3,7
four=3,7,2,6. The first condition queries the current Rayon pool. The parallel iterator remains selected with four workers; that does not establish unchanged cold runtime.

All eight one-worker cells qualify faster. Primary n23 paired ratios are1.0770 F4 and1.0652 F5. The n17 F4 four-worker control qualifies slower at0.8436, CI[0.8284,0.8504]; the other three multiworker cells are neutral. This result blocks a regression-free claim for the unrestricted guard. A subsequent protocol narrows activation to explicitly configured one-worker processes before querying the registry; startup/scheduling is a hypothesis, not a proved diagnosis.

Admission, first eligible of three attempts, five-pair exact bootstrap and max(2%, twice median absolute A/A noise) are unchanged. Rejected attempts and every slower/neutral/inconclusive result remain in serial-clear-summary.json. Negative-control movements are not interpreted as algorithm gains.

This is an incremental matrix-call experiment. It does not measure complete recursive roots, decomposition, or a whole IC/rho pipeline. The eighteen-arm solver table retains its prior source and serial-clear-off flags; no complete-solver benefit is inferred from this kernel result. Source: SERIAL_CLEAR_PROTOCOL.md, run-serial-clear.sh, analyze-serial-clear.rs and runs/serial-clear/ in the raw archive. Both kernel-test switch states pass on the native host before timing.

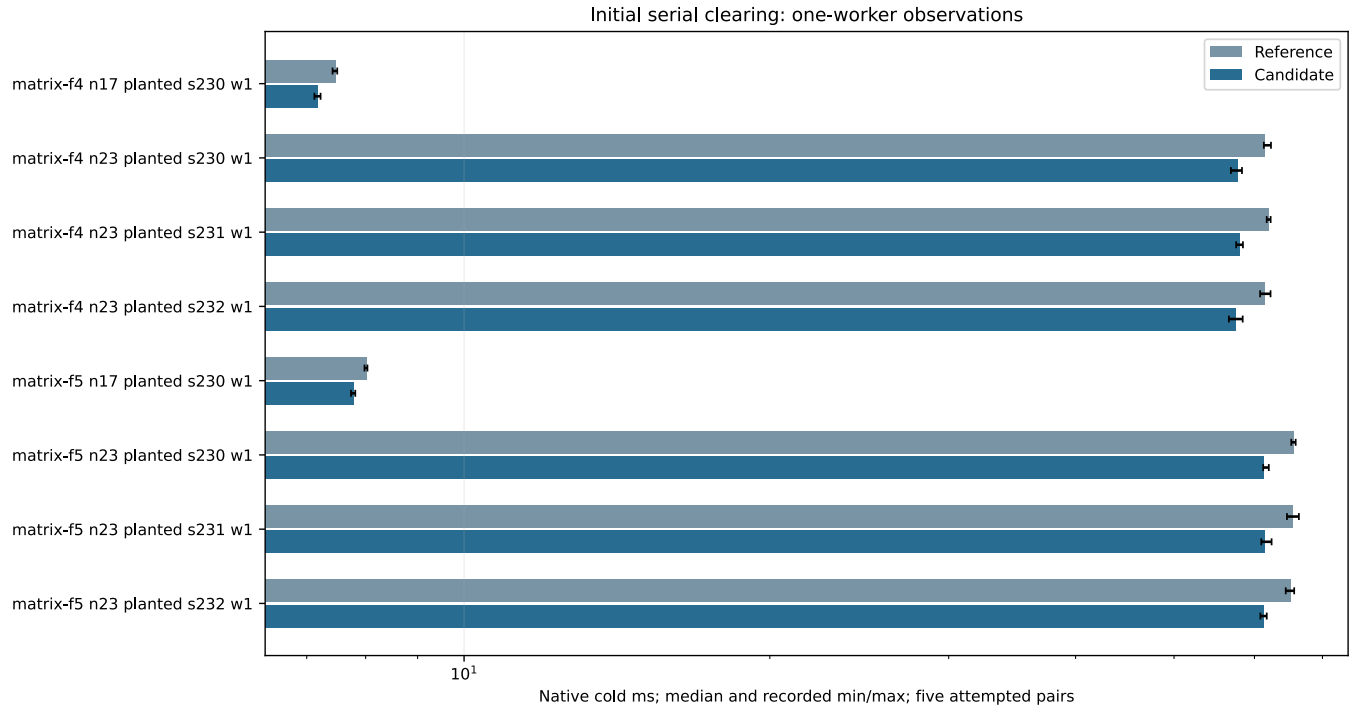

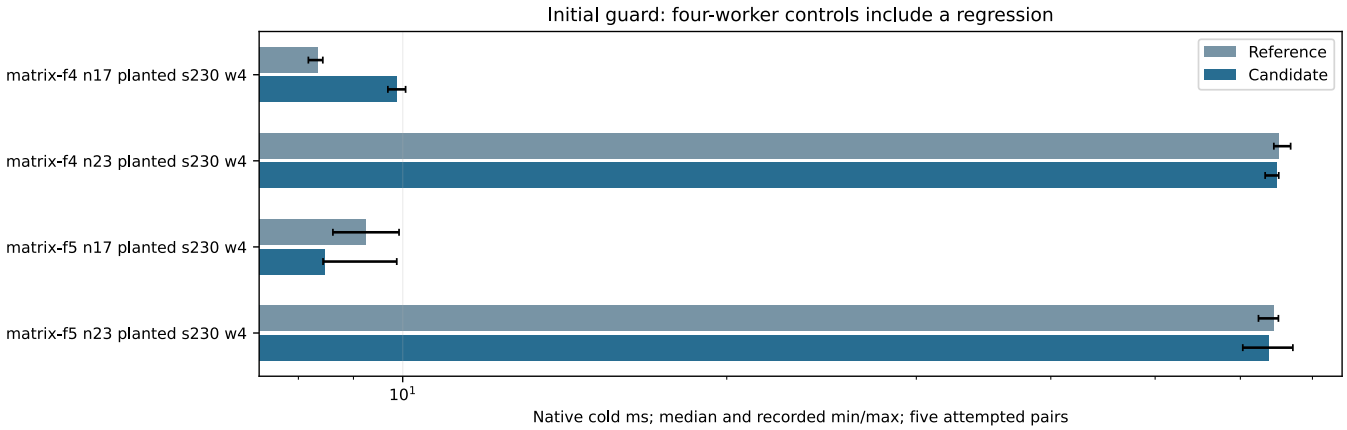
Initial guard: four-worker controls include a regression
Reference
Candidate
matrix-f4 n17 planted s230 w4
matrix-f4 n23 planted s230 w4
matrix-f5 n17 planted s230 w4
matrix-f5 n23 planted s230 w4
10^1
Native cold ms; median and recorded min/max; five attempted pairs

All paired results, including the slower control

Arm	n	Seed	Workers	Before ms	After ms	Ratio	Decision
matrix-f4	17	230	1	7.4833	7.1817	1.0370	faster
matrix-f4	23	230	1	61.3743	57.7376	1.0770	faster
matrix-f4	23	231	1	62.0068	57.9712	1.0693	faster
matrix-f4	23	232	1	61.4660	57.5380	1.0652	faster
matrix-f5	17	230	1	8.0175	7.7868	1.0280	faster
matrix-f5	23	230	1	65.6287	61.2560	1.0652	faster
matrix-f5	23	231	1	65.3784	61.3875	1.0729	faster
matrix-f5	23	232	1	65.1584	61.3274	1.0620	faster
matrix-f4	17	230	4	8.3357	9.8786	0.8436	slower
matrix-f4	23	230	4	65.1697	64.7849	1.0120	neutral
matrix-f5	17	230	4	9.2373	8.4551	1.0451	neutral
matrix-f5	23	230	4	64.3608	63.6913	1.0081	neutral