Run report: m3-ell1609903-q45

Session `ECBS1h51432cd8311e`, status `complete`, 1024 records; spec `ECS1h64a1f9d0e994` sha256 `64a1f9d0e994ce39…`; binary sha256 `ee0af723cf6c1064…`, git commit `f300174628b4fbd71ba925d8edae0bc105e6e00b`; env class `ECBENV2ha8c679da3835`; host env class sha256 `a8c679da3835cd97…` (Intel Xeon 6975P-C, 32 logical CPUs, per `ecbench host`). Isolation levels earned: ['L0'] (shared host, no CPU reservation). Spec label: conductor gap ell=1609903 (2^20..), D=-19, hard kernel, q 45 bits: crater vs 3 floors, 128 shared targets. Arms: rho-neg = rho.negation (reference), rho-neg-aa = rho.negation (control). Workloads: 4 curves × 128 `planted_shared` targets, target seed 2026101813, measurement seed 20261018, rounds 1, warm-up 0. Record outcomes: {'verified': 1024}. Unit: S = charged group operations / sqrt(r) (`cost.s`, lower bound: canonicalisations uncharged). Wall time not read. Raw records: `sessions/m3-ell1609903-q45/records.jsonl`.

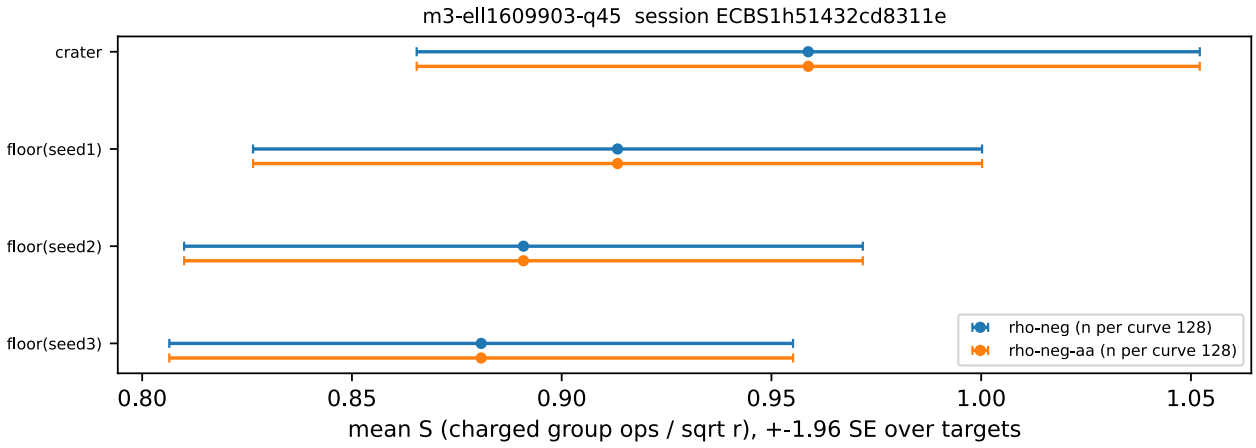


Figure 1: Mean S per curve and arm with ±1.96 SE over targets (recorded values).

arm	curve	slug	n	mean S	SE	min / max
rho-neg	crater	icv1-fp45-t9290211-d1c818b3	128	0.9588	0.0476	0.068 / 3.218
rho-neg	floor(seed1)	icv1-fp45-t9290211-20343fd2	128	0.9133	0.0443	0.050 / 2.492
rho-neg	floor(seed2)	icv1-fp45-t9290211-56b81cc9	128	0.8909	0.0413	0.060 / 2.349
rho-neg	floor(seed3)	icv1-fp45-t9290211-931d8f76	128	0.8808	0.0379	0.090 / 1.789
rho-neg-aa	crater	icv1-fp45-t9290211-d1c818b3	128	0.9588	0.0476	0.068 / 3.218
rho-neg-aa	floor(seed1)	icv1-fp45-t9290211-20343fd2	128	0.9133	0.0443	0.050 / 2.492
rho-neg-aa	floor(seed2)	icv1-fp45-t9290211-56b81cc9	128	0.8909	0.0413	0.060 / 2.349
rho-neg-aa	floor(seed3)	icv1-fp45-t9290211-931d8f76	128	0.8808	0.0379	0.090 / 1.789