Run report: ecbench session `ECBS1h31e0fab46e23` (e-m16.attempt3-killed), 2026-10-19T16:11Z

Part E, `m = 16` (killed after 3 of 4 runs; superseded by `e-m16`). Spec `specs/SPEC-E-m16.json`. Binary sha256 `c143cf62…`, commit `e403626cb` (clean). Host: Xeon @ 2.10 GHz, 4 vCPU, one core per session (isolation level L1 or L0, recorded per run: wall time is descriptive only). The session was killed by a container restart: 3 of 4 planned runs were recorded and the rest are missing. Its status is `running`, `ecbench verify` fails exactly its `session\_complete` and `record\_count` checks, and its records were not replayed.

arm	workload	m	status	S	GAE	trials	relations	wall (h)
rho-neg	`Wa1b3b10e6968`	16	verified	0.8992	2.731e+09	–	–	0.589
ic-wied	`Wa1b3b10e6968`	16	verified	1.482	4.5e+09	3108064	16019	3.077
rho-neg	`W37a8388076b0`	16	verified	2.235	6.789e+09	–	–	1.475

All values are recorded fields (`S` = `cost.s`, GAE = `cost.total_gae`, trials and relations from `counters`, wall = `time.solve_wall_ns` ÷ $3.6{\cdot}10^{12}$); no run here is a replay. Records: `sessions/e-m16.attempt3-killed/records.jsonl`. Audit receipts: `audits/`.

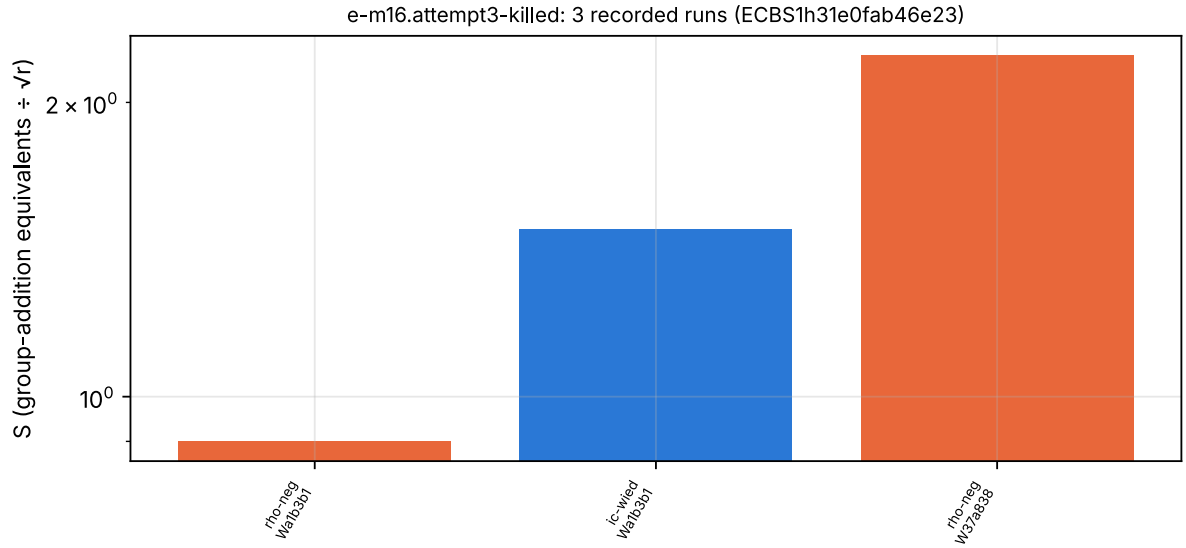


Figure 1: Recorded `S` per run, session `ECBS1h31e0fab46e23`.