Frozen synthetic fixture preparation

Run `fixture-preparation`; source freeze `d86eb011034066532d3645369a783f44be158b1c`. Host `a81fcf6dc864`, Debian 13 x86_64, managed four-CPU virtual host, L0. Workloads use public synthetic fixtures or public-parameter checks. No wall-clock or full-cost improvement is admitted.

Raw outputs: run directory. Commands, binary/input hashes, seeds, resource limits and statuses are in execution receipts and the versioned protocols in the study root. No independent-host replay is claimed.

Recorded observations

Metric	Count / recorded value
generated ladder fixtures	8
registered fixture models	13
rejected ladder candidates retained	147

Vector figures and editable data accompany this report on the following pages.

The native preparation freezes 13 exact curve/twist/extension fixtures, including eight A=-3 ordinary prime-order ladder models. Public SplitMix seed 20261021 plus declared size/replicate offsets, every rejected candidate, exact whole/subgroup orders, generators and tower-to-flat conversions are retained. This is fixture construction, not a scaling or DLP performance result. Identities are independently reconstructed by the repository's canonical Rust constructor in registry-check-v2.json.

The chart has no statistical interval: census counts are exact on the stated finite sets; solver completion counts describe these bounded processes only. Missing or failed computations stay unresolved. Full original acceptance criteria and proof/measurement gaps remain in the requirement matrix.

Frozen synthetic fixture preparation
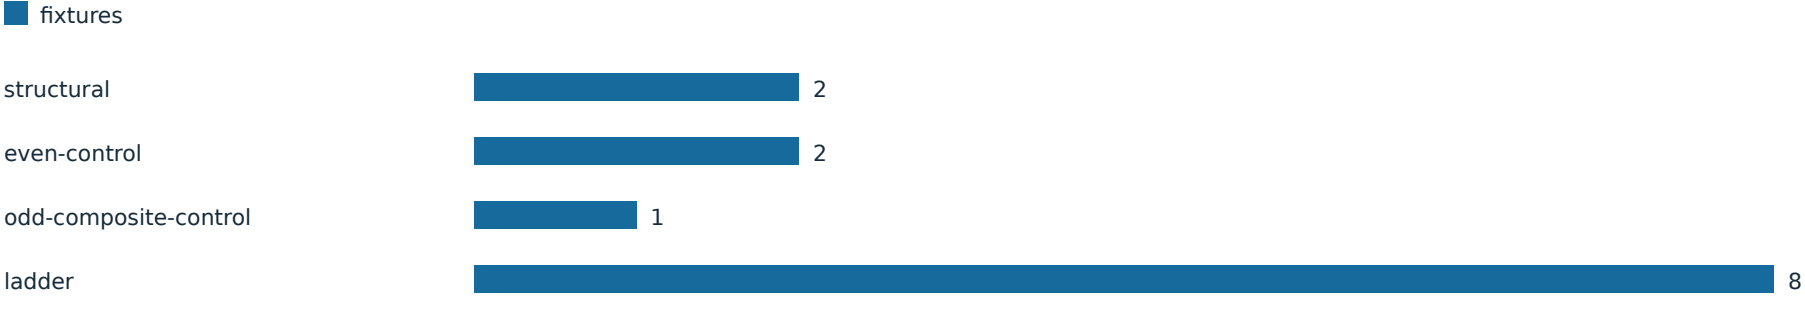
Recorded counts; exact censuses or bounded run outcomes. No wall-time comparison.